
MC34063A
MC34063E

DC-DC CONVERTER CONTROL CIRCUITS

- OUTPUT SWITCH CURRENT IN EXCESS OF 1.5A
- 2% REFERENCE ACCURACY
- LOW QUIESCENT CURRENT: 2.5mA (TYP.)
- OPERATING FROM 3V TO 40V
- FREQUENCY OPERATION TO 100KHz
- ACTIVE CURRENT LIMITING



DIP-8



SO-8

DESCRIPTION


The MC34063A/E series is a monolithic control circuit delivering the main functions for DC-DC voltage converting.

The device contains an internal temperature compensated reference, comparator, duty cycle controlled oscillator with an active current limit circuit, driver and high current output switch.

Output voltage is adjustable through two external resistors with a 2% reference accuracy.

Employing a minimum number of external components the MC34063A/E devices series is designed for Step-Down, Step-Up and Voltage-Inverting applications.

BLOCK DIAGRAM

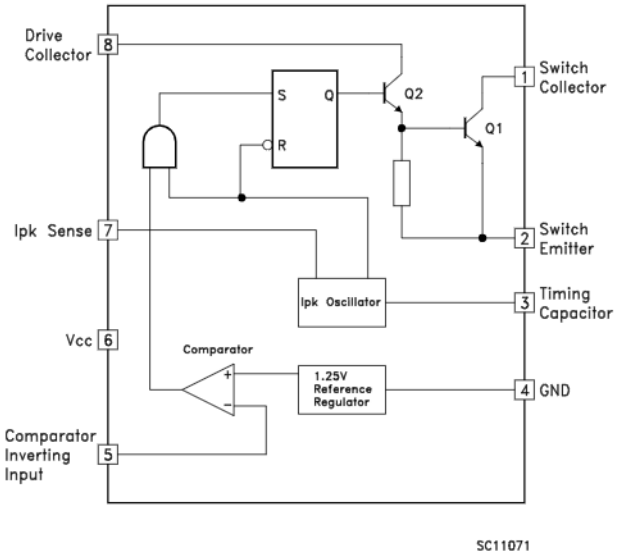

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CC}	Power Supply Voltage	50	V
V_{ir}	Comparator Input Voltage Range	-0.3 to 40	V
V_{SWC}	Switch Collector Voltage	40	V
V_{SWE}	Switch Emitter Voltage (VSWC = 40V)	40	V
V_{CE}	Switch Collector toEmitter Voltage	40	V
V_{dc}	Driver Collector Voltage	40	V
I_{dc}	Driver Collector Current	100	mA
I_{SW}	Switch Current	1.5	A
P_{tot}	Power Dissipation at T_{amb} = 25 °C (for **Plastic Package**) (for **SOIC Package**)	1.25 0.625	W
T_{op}	Operating Ambient Temperature Range (for **AC and EC SERIES**) (for **AB SERIES**) (for **EB SERIES**)	0 to 70 - 40 to 85 - 40 to 125	°C °C °C
T_{stg}	Storage Temperature Range	- 40 to 150	°C


Absolute Maximum Rating are those values beyond which damage to the device may occur.
Functional operation under these condition is not implied.

THERMAL DATA

Symbol	Parameter		DIP-8	SO-8	Unit
$R_{thj\text{-}amb}$	Thermal Resistance Junction-ambient (*)	Max	100	160	°C/W

(*) This value depends from thermal design of PCB on which the device is mounted.

CONNECTION DIAGRAM (top view)

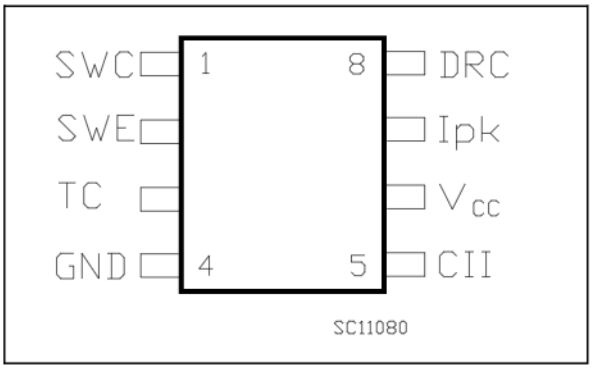

PIN CONNECTIONS

Pin No	Symbol	Name and Function
1	SWC	Switch Collector
2	SWE	Switch Emitter
3	TC	Timing Capacitor
4	GND	Ground
5	CII	Comparator Inverting Input
6	V_{CC}	Voltage Supply
7	I_{pk}	I_{pk} Sense
8	DRC	Voltage Driver Collector

ORDERING NUMBERS

Type	DIP-8	SO-8	SO-8 (tape & reel)
MC34063AB (*)	MC34063ABN	MC34063ABD	MC34063ABD-TR
MC34063AC (*)	MC34063ACN	MC34063ACD	MC34063ACD-TR
MC34063EB	MC34063EBN	MC34063EBD	MC34063EBD-TR
MC34063EC	MC34063ECN	MC34063ECD	MC34063ECD-TR

(*) The "A" version is not recommended for new designs.

ELECTRICAL CHARACTERISTICS (Refer to the test circuits, V_{CC} = 5V, T_a = T_{LOW} to T_{HIGH}, unless otherwise specified, see note 2)

OSCILLATOR

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
f_{OSC}	Frequency	V_{pin5} = 0 V C_T = 1 nF T_a = 25 °C	24	33	42	KHz
I_{chg}	Charge Currernt	V_{CC} = 5 to 40 V T_a = 25 °C	24	33	42	∝A
I_{dischg}	Discharge Current	V_{CC} = 5 to 40 V T_a = 25 °C	140	200	260	∝A
I_{dischg}/I_{chg}	Discharge to Charge Current Ratio	Pin 7 = V_{CC} T_a = 25 °C	5.2	6.2	7.5	
$V_{ipk(sense)}$	Current Limit Sense Voltage	I_{chg} = I_{dischg} T_a = 25 °C	250	300	350	mV

OUTPUT SWITCH

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{CE(sat)}$	Saturation Voltage, Darlington Connection	I_{SW} = 1 A Pins 1, 8 connected		1	1.3	V
$V_{CE(sat)}$	Saturation Voltage	I_{SW} = 1 A R_{pin8} = 82 Ω to V_{CC}, Forced β ~ 20		0.45	0.7	V
h_{FE}	DC Current Gain	I_{SW} = 1 A V_{CE} = 5 V T_a = 25 °C	50	120		
$I_{C(off)}$	Collector Off-State Current	V_{CE} = 40 V		0.01	100	∝A

COMPARATOR

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_{th}	Threshold Voltage	T_a = 25 °C T_a = T_{LOW} to T_{HIGH}	1.225 1.21	1.25	1.275 1.29	V V
Reg_{line}	Threshold Voltage Line Regulation	V_{CC} = 3 to 40 V		1	5	mV
I_{IB}	Input Bias Current	V_{IN} = 0 V		-5	-400	nA


TOTAL DEVICE

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CC}	Supply Current	V_{CC} = 5 to 40 V C_T = 1 nF Pin 7 = V_{CC} V_{pin5} > V_{th} Pin 2 = GND Remaining pins open for **MC34063A** for **MC34063E**		 2.5 1.5	 4 4	 mA mA
$V_{START-UP}$	Start-up Voltage (note 4)	T_a = 25 °C C_T = 1 ∝F Pin 5 = 0 V for **MC34063A** for **MC34063E**		 2.1 1.5		 V V


NOTES:
1) Maximum package power dissipation limit must be observed.
2) T_{LOW} = 0 °C, T_{HIGH} = 70 °C (AC and EC series); T_{LOW} = -40 °C, T_{HIGH} = 85 °C (AB series); T_{LOW} = -40 °C, T_{HIGH} = 125 °C (EB series).
3) If Darlington configuration is not used, care must be taken to avoid deep saturation of output switch. The resulting switch-off time may be adversely affected. In a Darlington configuration the following output driver condition is suggested:
Forced β of output current switch = $I_{COUTPUT}/(I_{CDRIVER}$ - 1mA*) ≥ 10
* Current less due to a built in 1KΩ antileakage resistor.
4) Start-up Voltage is the minimum Power Supply Voltage at which the internal oscillator begins to work.

TYPICAL ELECTRICAL CHARACTERISTICS


Emitter Follower Configuration Output Saturation Voltage vs Emitter Current

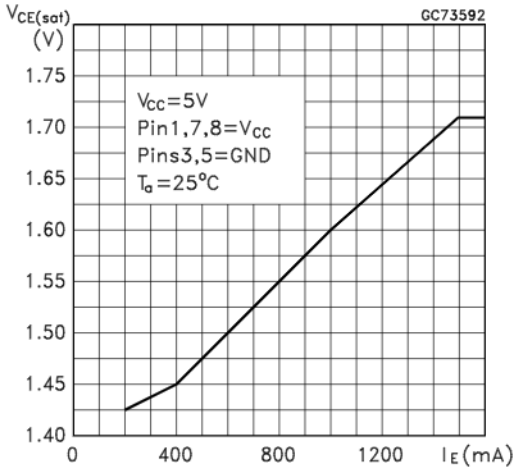


Output Switch ON-OFF Time vs Oscillator Timing Capacitor

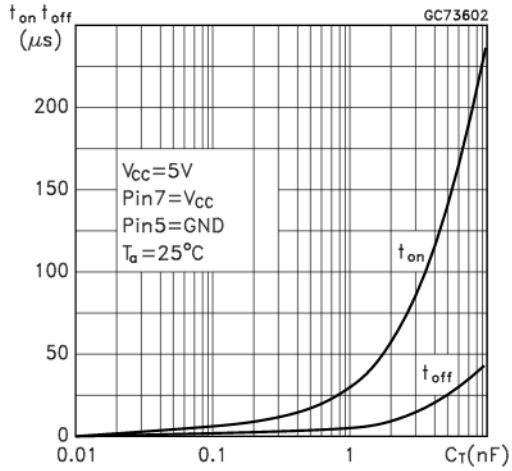


Common Emitter Configuration Output Switch Saturation Voltage vs Collector Current

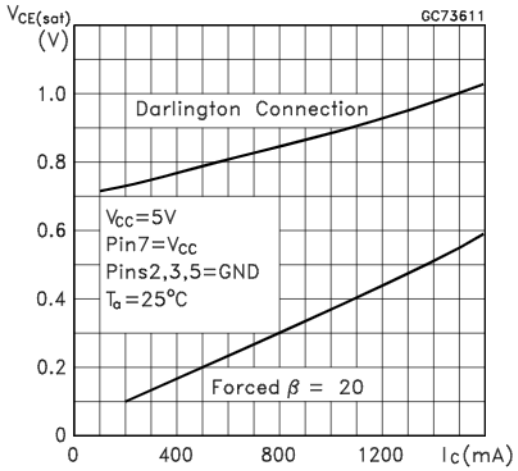


Darlington Configuration Collector Emitter Saturation Voltage ($V_{CE(sat)}$) vs Temperature

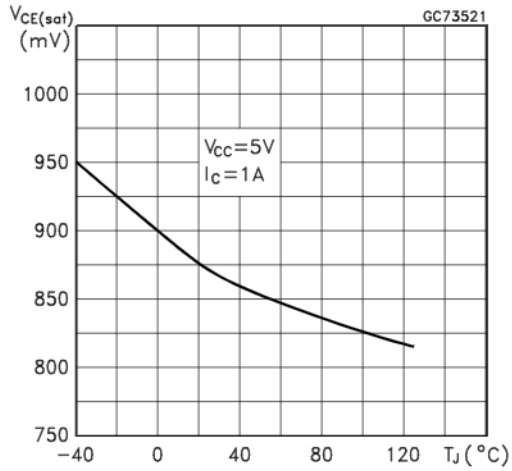

Power Collector Emitter Saturation Voltage ($V_{CE(sat)}$) vs Temperature

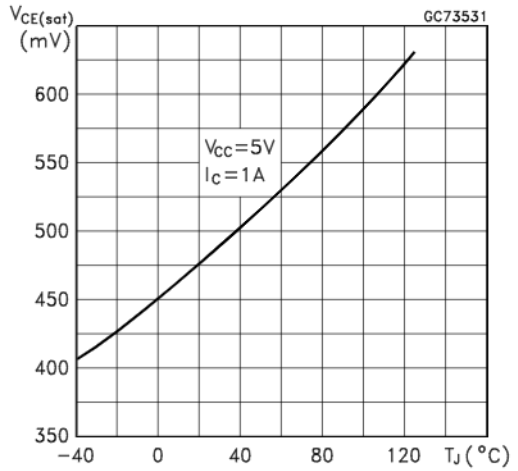


Current Limit Sense Voltage Voltage (V_{ipk}) vs Temperature

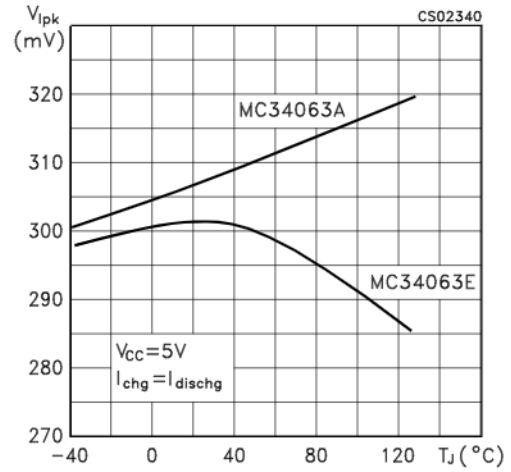


TYPICAL ELECTRICAL CHARACTERISTICS (Continued)


Reference Voltage vs Temperature

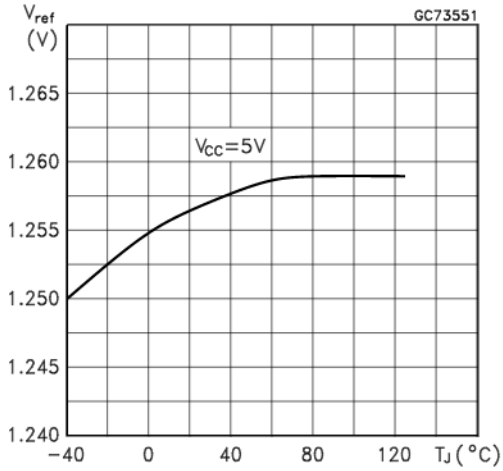


Bias Current vs Temperature

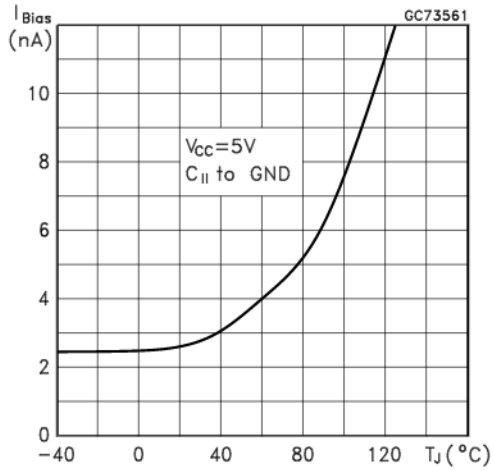

Supply Current vs Temperature

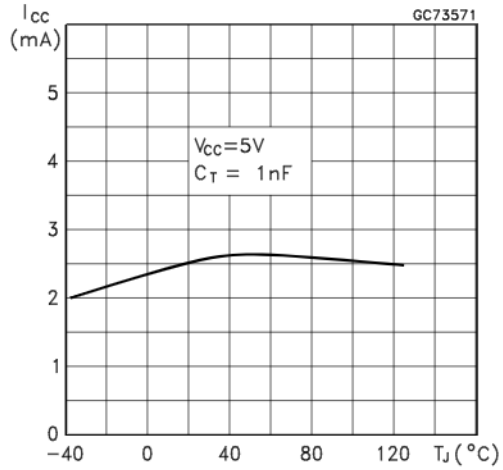


Supply Current vs Input Voltage

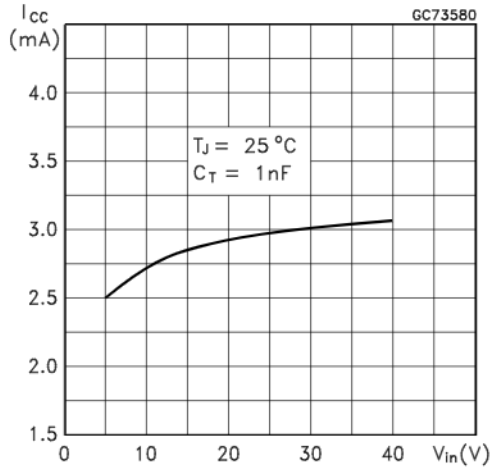



TYPICAL APPLICATION CIRCUIT

Step-Up Converter

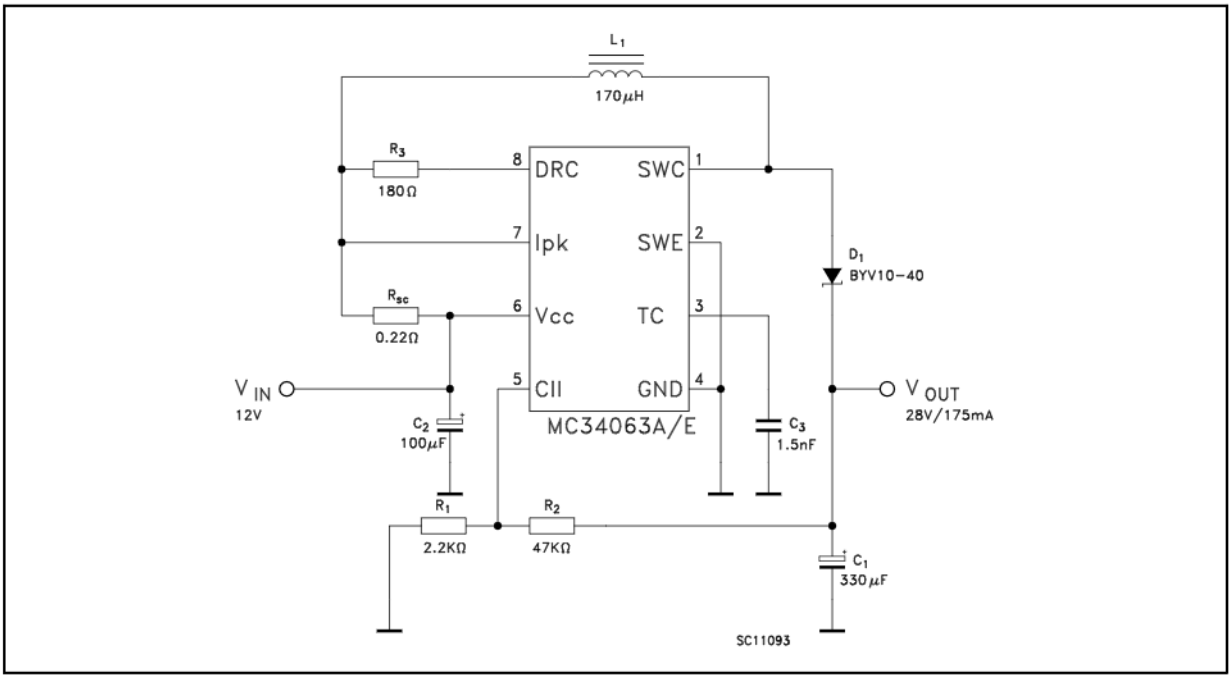

Printed Demoboard






Symbol	Pin
Vout	1
GND	2
GND	3
Vin	4


Test Condition (V_{OUT} = 28V)

Test	Conditions	Value (Typ.)	Unit
Line Regulation	V_{IN} = 8 to 16V, I_O = 175 mA	30	mV
Load Regulation	V_{IN} = 12V, I_O = 75 to 175 mA	10	mV
Output Ripple	V_{IN} = 12V, I_O = 175 mA	300	mV
Efficency	V_{IN} = 12V, I_O = 175 mA	89	%

Step-Down Converter

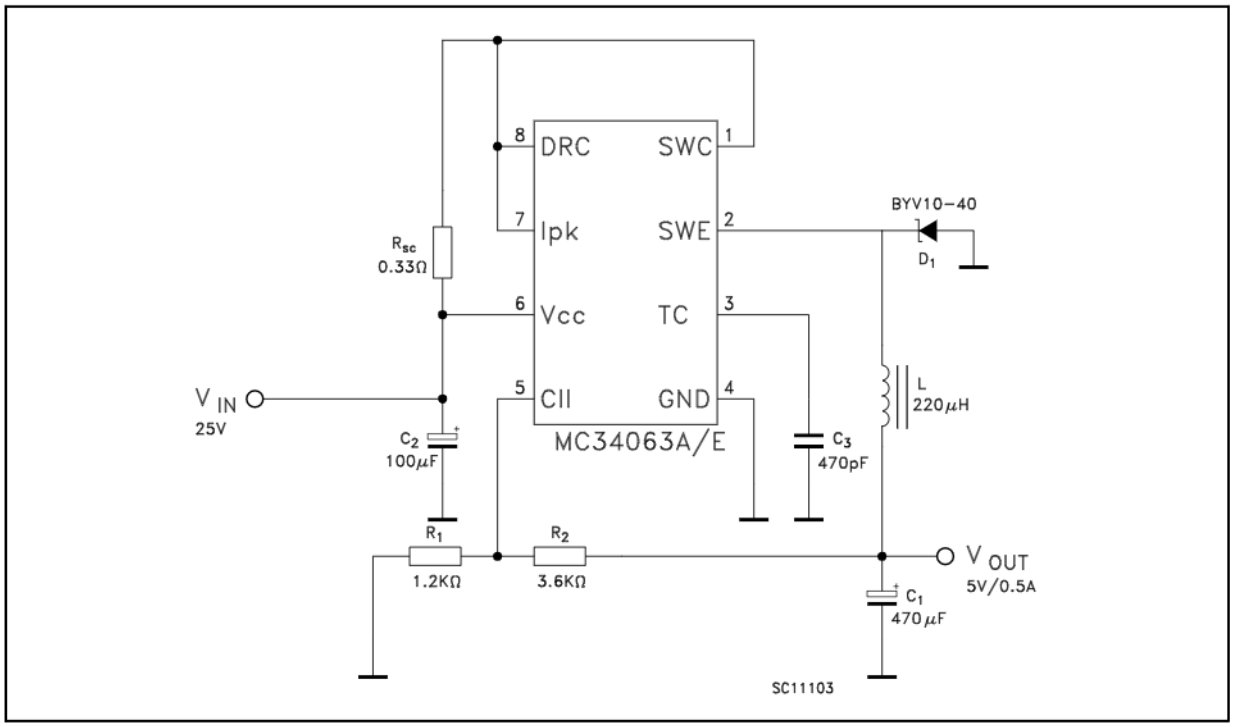

Printed Demoboard

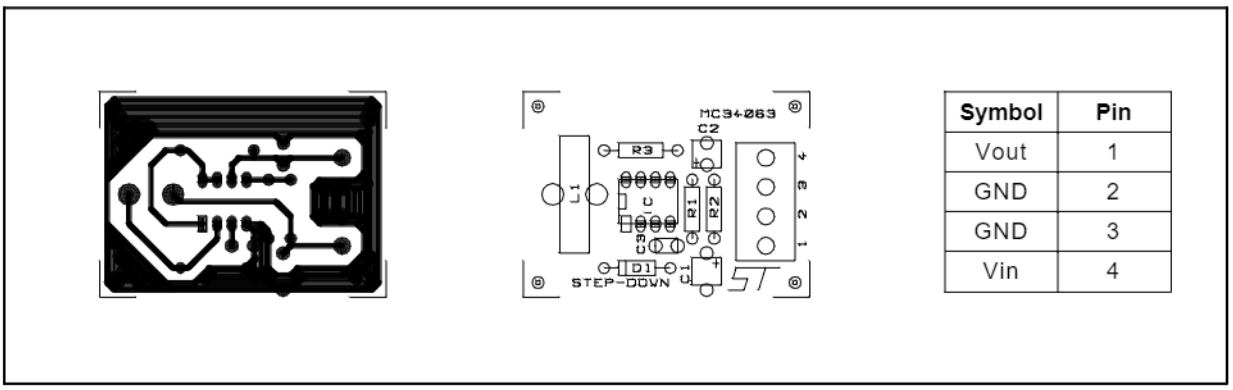


Symbol	Pin
Vout	1
GND	2
GND	3
Vin	4


Test Condition (V_{OUT} = 5V)


Test	Conditions	Value (Typ.)	Unit
Line Regulation	V_{IN} = 15 to 25V, I_O = 500 mA	5	mV
Load Regulation	V_{IN} = 25V, I_O = 50 to 500 mA	30	mV
Output Ripple	V_{IN} = 25V, I_O = 500 mA	100	mV
Efficency	V_{IN} = 25V, I_O = 500 mA	80	%
I_{SC}	V_{IN} = 25V, R_{LOAD} = 0.1Ω	1.2	A

Voltage Inverting Converter

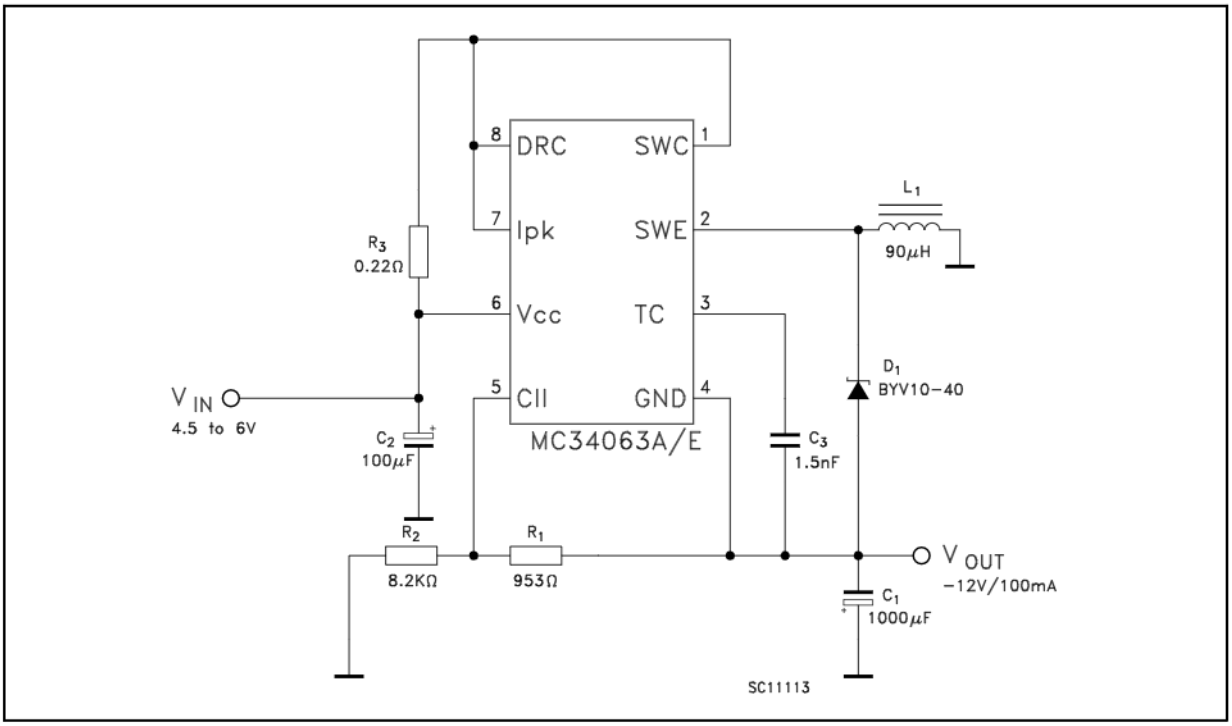

Printed Demoboard





Symbol	Pin
Vout	1
GND	2
GND	3
Vin	4

Test Condition (V_{OUT} = -12V)


Test	Conditions	Value (Typ.)	Unit
Line Regulation	V_{IN} = 4.5 to 6V, I_O = 100 mA	15	mV
Load Regulation	V_{IN} = 5V, I_O = 10 to 100 mA	20	mV
Output Ripple	V_{IN} = 5V, I_O = 100 mA	230	mV
Efficency	V_{IN} = 5V, I_O = 100 mA	58	%
I_{SC}	V_{IN} = 5V, R_{ILOAD} = 0.1Ω	0.9	A

Calculation


Parameter	Step-Up (Discontinuos mode)	Step-Down (Continuos mode)	Voltage Inverting (Discontinuos mode)
t_{on}/t_{off}	$\frac{V_{out} + V_F - V_{in(min)}}{V_{in(min)} - V_{sat}}$	$\frac{V_{out} + V_F}{V_{in(min)} - V_{sat} - V_{out}}$	$\frac{\lvert V_{out}\rvert + V_F}{V_{in} - V_{sat}}$
$(t_{on} + t_{off})max$	$1/f_{min}$	$1/f_{min}$	$1/f_{min}$
C_T	$4.5x10^{-5}t_{on}$	$4.5x10^{-5}t_{on}$	$4.5x10^{-5}t_{on}$
$I_{PK(switch)}$	$2I_{out(max)}[(t_{on}/t_{off})+1]$	$2I_{out(max)}$	$2I_{out(max)}[(t_{on}/t_{off})+1]$
R_{SC}	$0.3/I_{PK(switch)}$	$0.3/I_{PK(switch)}$	$0.3/I_{PK(switch)}$
C_O	$\cong \frac{I_{out}\,t_{on}}{V_{ripple\,(p-p)}}$	$\frac{I_{PK(switch)}\,(t_{on} + t_{off})}{8V_{ripple\,(p-p)}}$	$\cong \frac{I_{out}\,t_{on}}{V_{ripple\,(p-p)}}$
L(min)	$\frac{V_{in(min)} - V_{sat}}{I_{PK\,(switch)}} t_{on\,(max)}$	$\frac{V_{in(min)} - V_{sat} - V_{out}}{I_{PK\,(switch)}} t_{on\,(max)}$	$\frac{V_{in(min)} - V_{sat}}{I_{PK\,(switch)}} t_{on\,(max)}$

NOTES:
V_{sat} = Saturation voltage of the output switch
V_F = Foward voltage drop of the output rectifier
THE FOLLOWING POWER SUPPLY CHARACTERISTICS MUST BE CHOSEN:
V_{in} = Nominal input voltage
V_{out} = Desired output voltage, $|V_{out}| = 1.25(1+R_2/R_1)$
I_{out} = Desired output current
f_{min} = Minimum desired output switching frequency at the selected values of Vin and Io
V_{ripple} = Desired peak to peak output ripple voltage. In practice, the calculaed capacitor value will and to be increased due to its equivalent series resistance and board layout. The ripple voltage should be kept to a low value since it will directly affect the line and load regulation.


Step-up With External NPN Switch

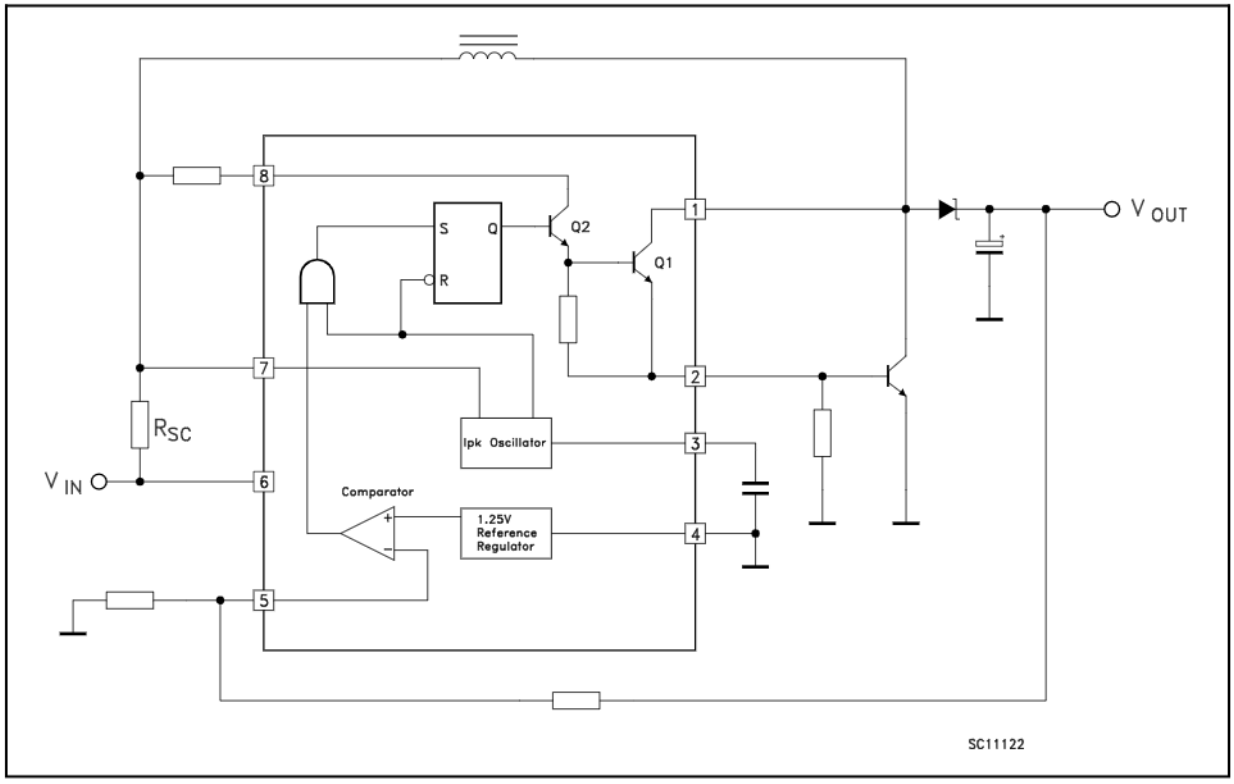


Step-down With External NPN Switch

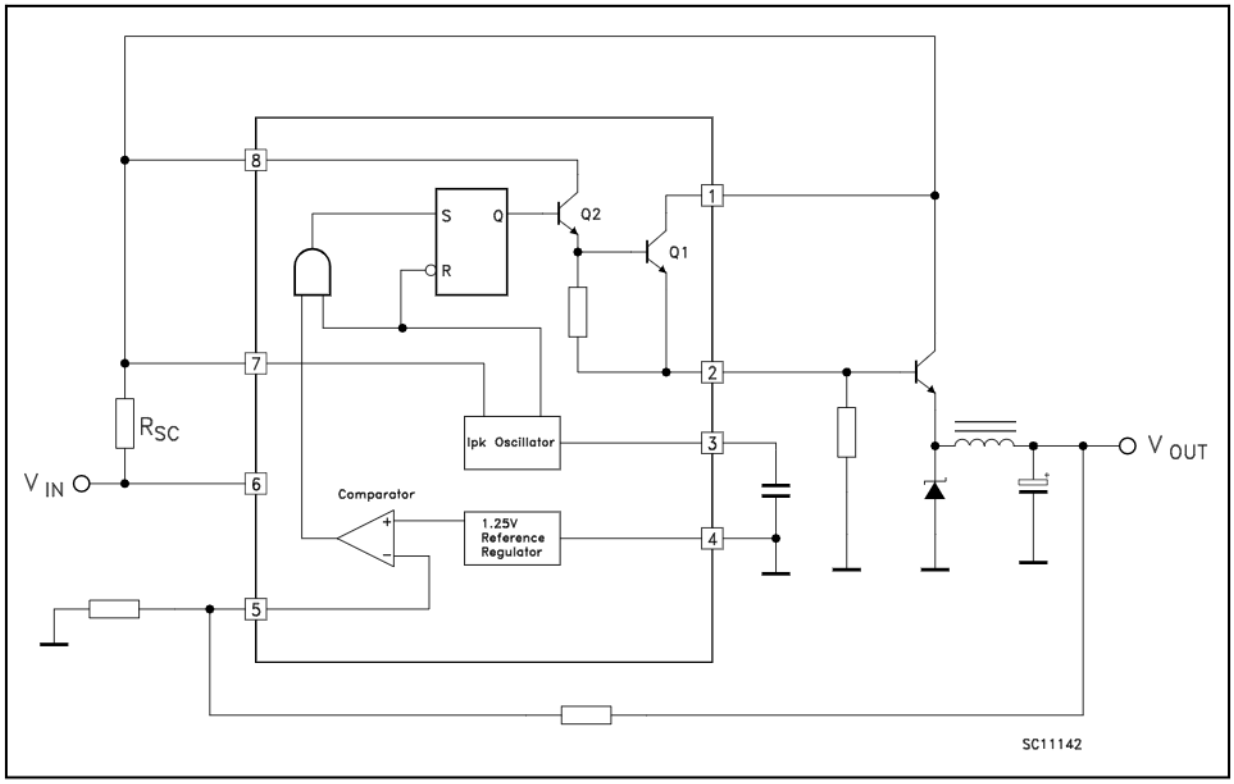


Step-down With External PNP Switch

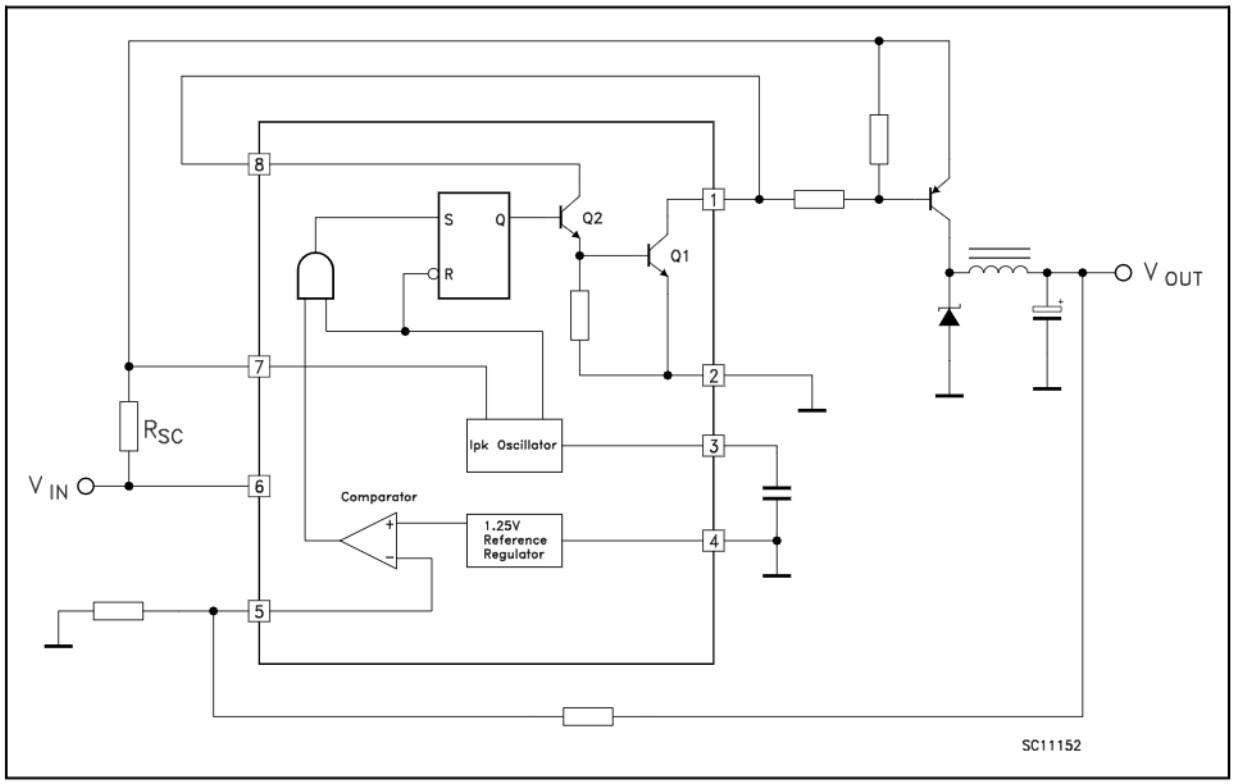


Voltage Inverting With External NPN Switch

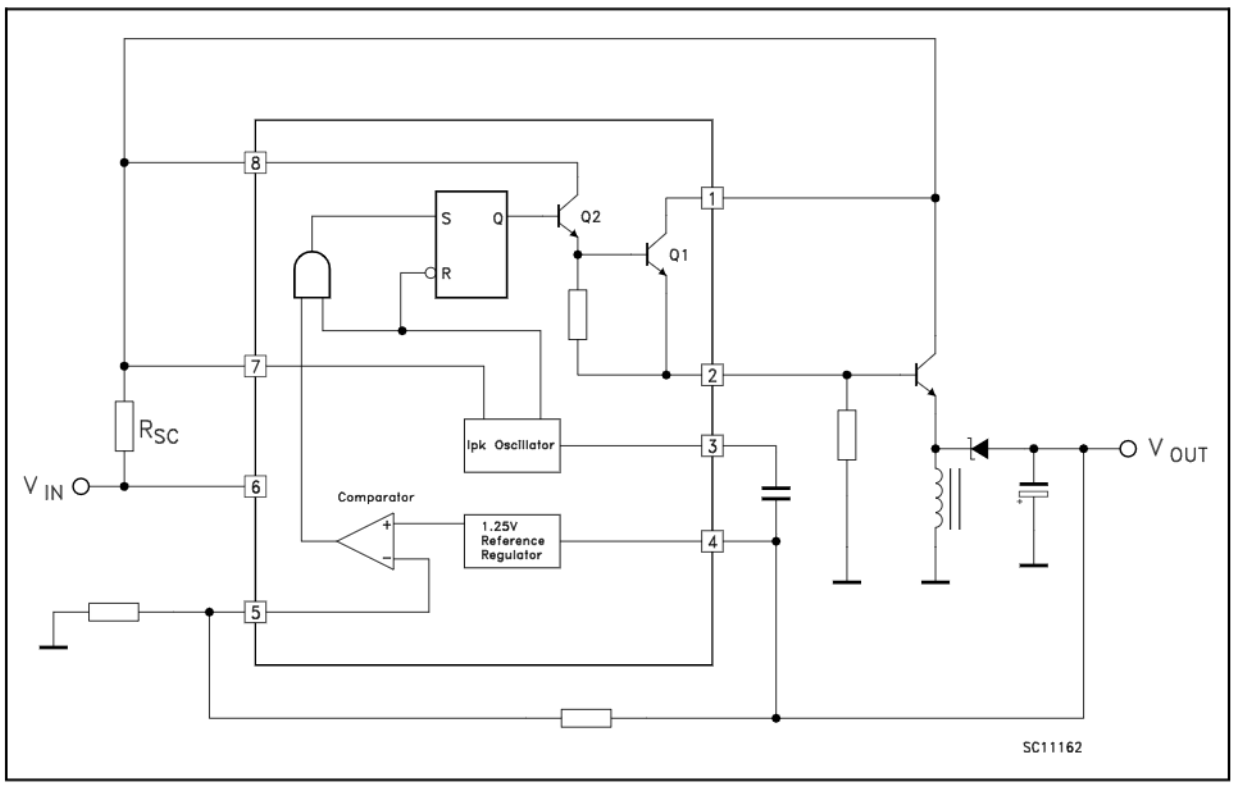


Voltage Inverting With External PNP Saturated Switch

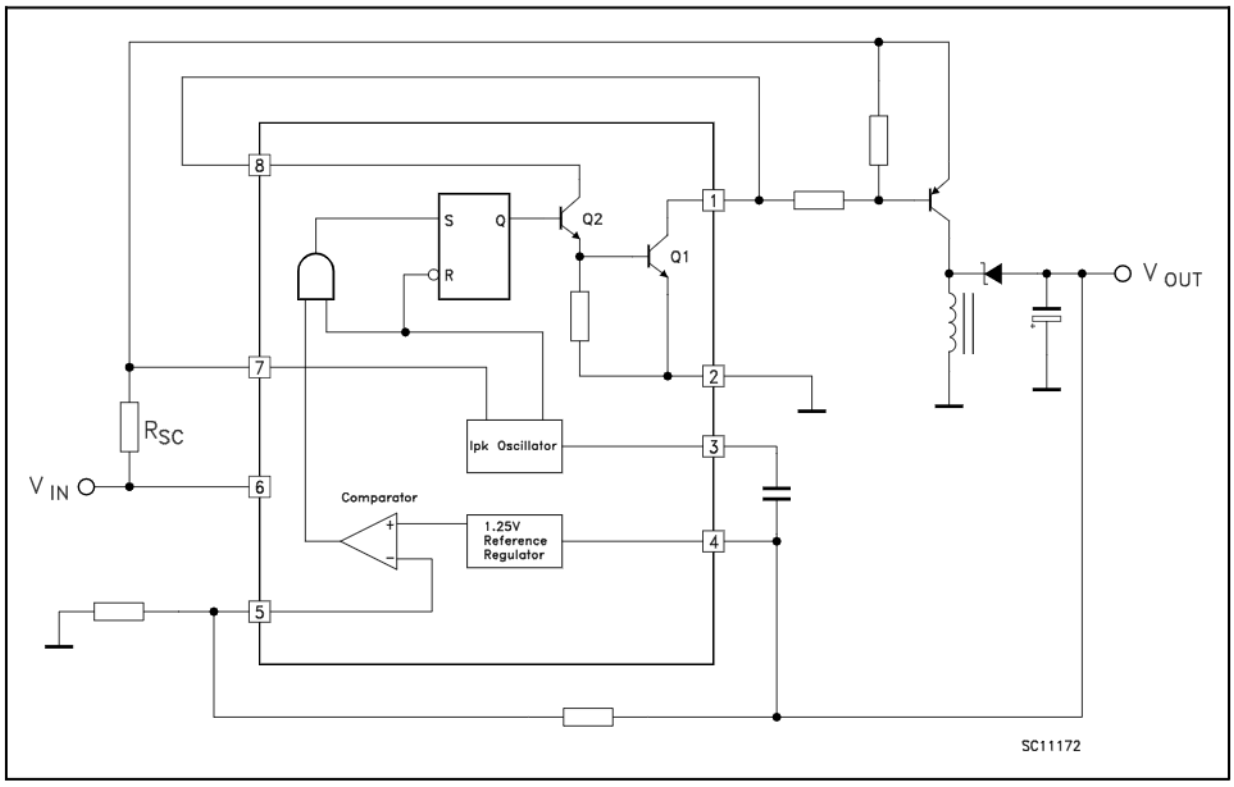

Dual Output Voltage

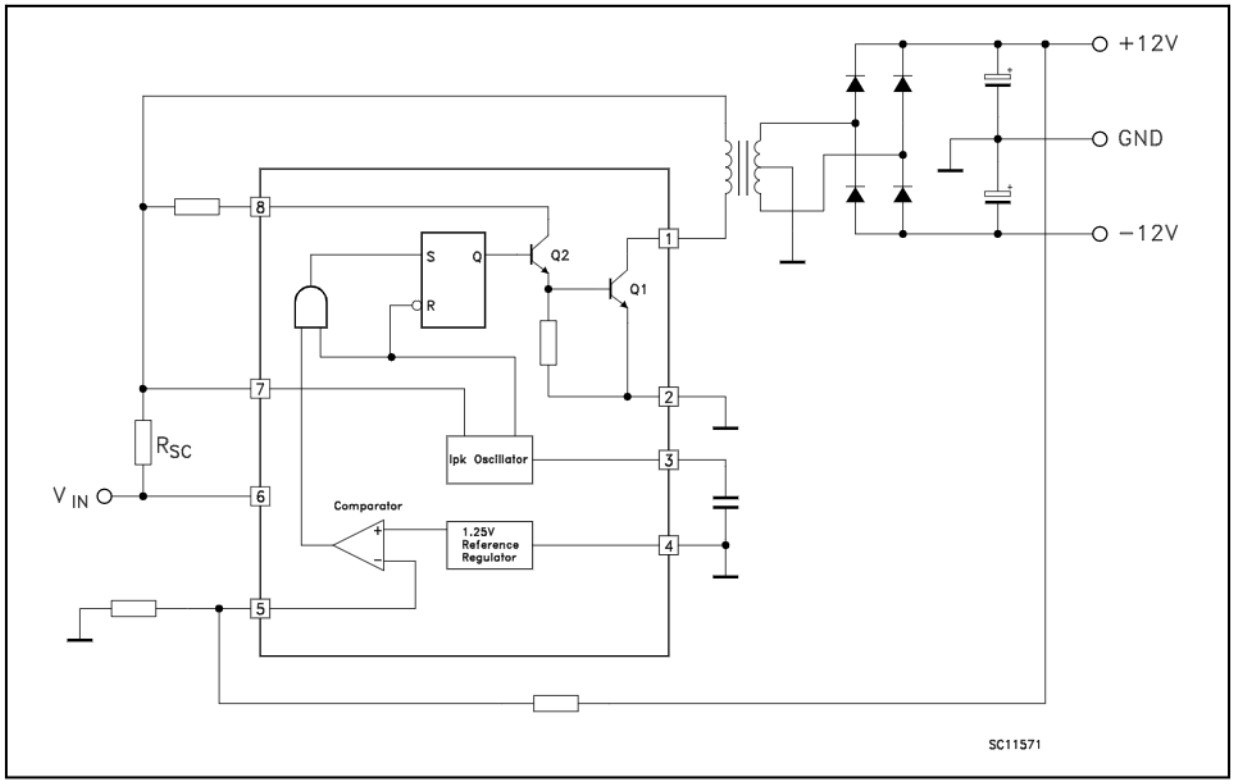


Higher Output Power, Higher Input Voltage

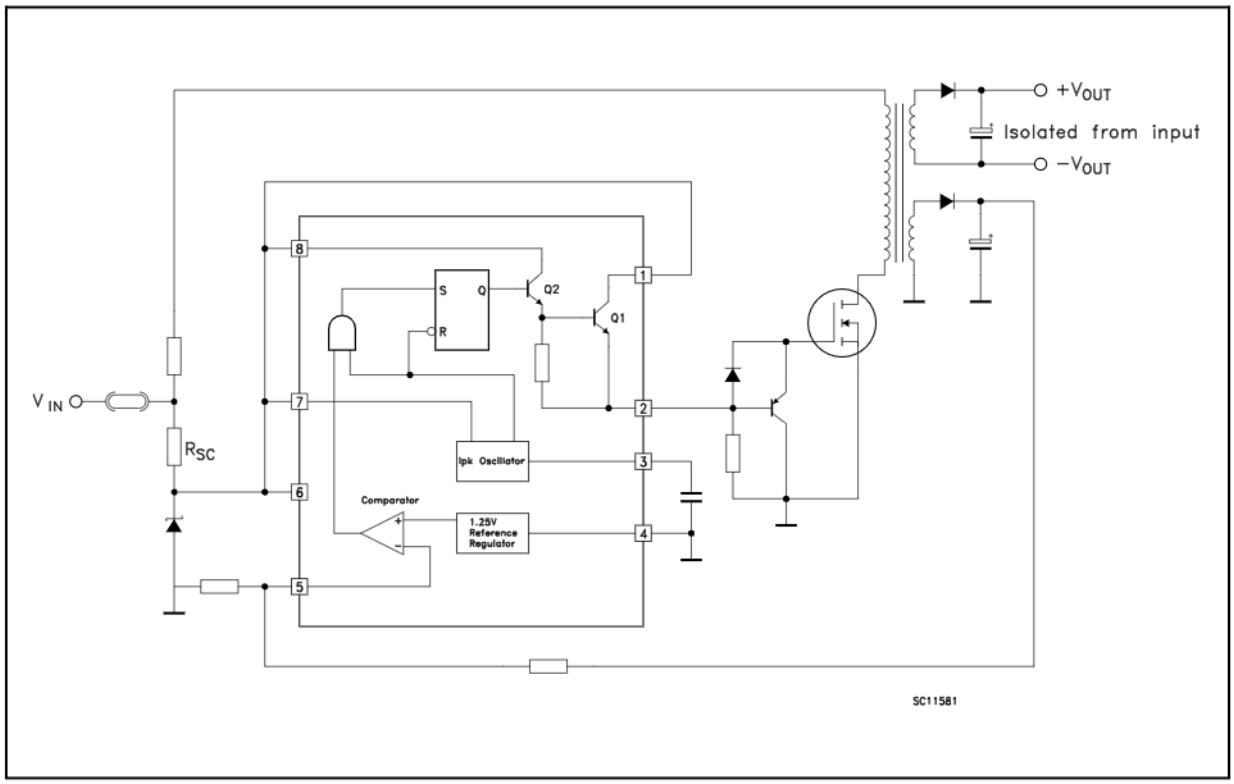

Plastic DIP-8 MECHANICAL DATA


DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A		3.3			0.130	
a1	0.7			0.028		
B	1.39		1.65	0.055		0.065
B1	0.91		1.04	0.036		0.041
b		0.5			0.020	
b1	0.38		0.5	0.015		0.020
D			9.8			0.386
E		8.8			0.346	
e		2.54			0.100	
e3		7.62			0.300	
e4		7.62			0.300	
F			7.1			0.280
I			4.8			0.189
L		3.3			0.130	
Z	0.44		1.6	0.017		0.063

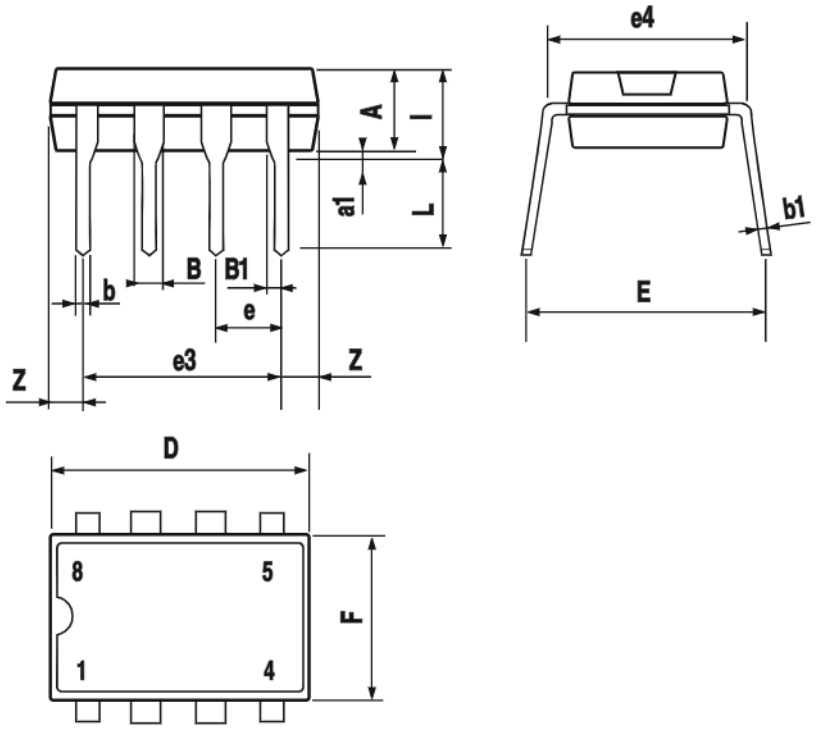

P001F

SO-8 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			1.75			0.068
a1	0.1		0.25	0.003		0.009
a2			1.65			0.064
a3	0.65		0.85	0.025		0.033
b	0.35		0.48	0.013		0.018
b1	0.19		0.25	0.007		0.010
C	0.25		0.5	0.010		0.019
c1	45 (typ.)					
D	4.8		5.0	0.188		0.196
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		3.81			0.150	
F	3.8		4.0	0.14		0.157
L	0.4		1.27	0.015		0.050
M			0.6			0.023
S	8 (max.)					

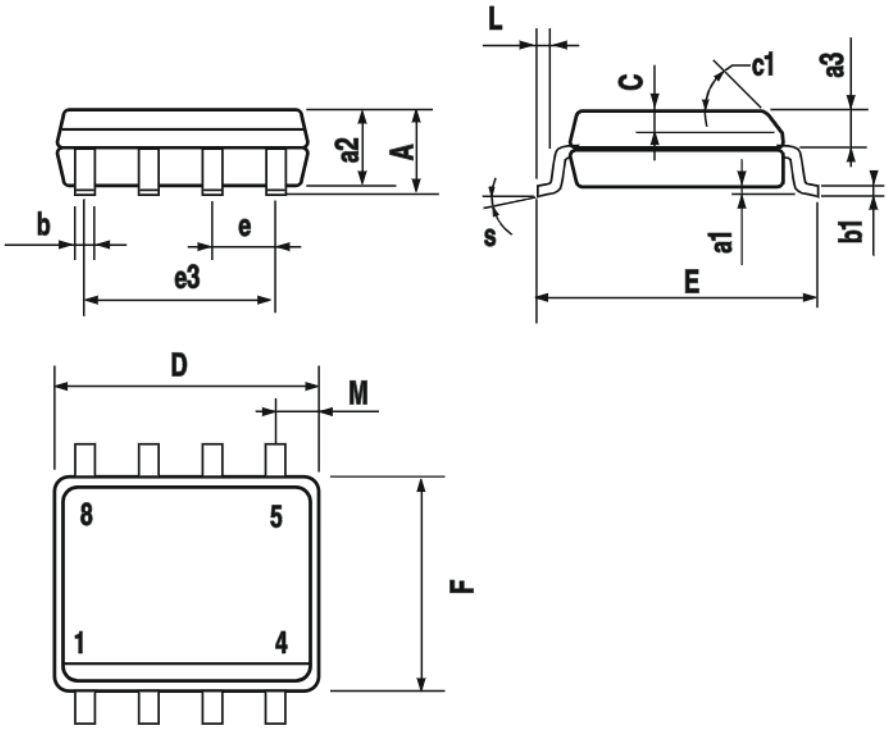

0016023

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

http://www.st.com