查询2SC3751供应商 捷多邦，专业PCB打样工厂，24小时加急出货

Ordering number : ENN1970B

NPN Triple Diffused Planar Silicon Transistor

2SC3751


800V / 1.5A Switching Regulator Applications

Features

- High breakdown voltage and high reliability.
- Fast switching speed.
- Wide ASO.
- Adoption of MBIT process.
- Micaless package facilitating mounting.

Package Dimensions

unit : mm
2041A

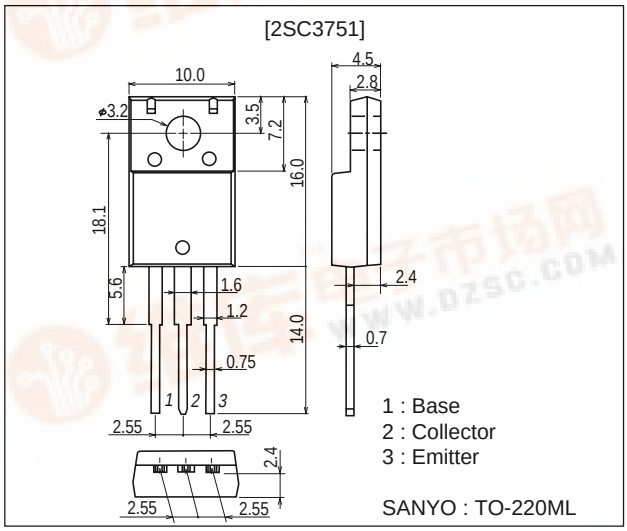

Specifications

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CBO}		1100	V
Collector-to-Emitter Voltage	V_{CEO}		800	V
Emitter-to-Base Voltage	V_{EBO}		7	V
Collector Current	I_C		1.5	A
Collector Current (Pulse)	I_{CP}	PW≤300μs, Duty Cycle≤10%	5	A
Base Current	I_B		0.8	A
Collector Dissipation	P_C	Tc=25°C	25	W
Junction Temperature	Tj		150	°C
Storage Temperature	Tstg		−55 to +150	°C

Electrical Characteristics at Ta=25°C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	V_{CB}=800V, I_E=0			10	μA
Emitter Cutoff Current	I_{EBO}	V_{EB}=5V, I_C=0			10	μA

Continued on next page.

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

找PDF 维库一下 pdf.dzsc.com


Continued from preceding page.


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
DC Current Gain	$h_{FE}1$	V_{CE}=5V, I_C=0.1A	10*		40*	
	$h_{FE}2$	V_{CE}=5V, I_C=0.5A	8			
Gain-Bandwidth Product	f_T	V_{CE}=10V, I_C=0.1A		15		MHz
Output Capacitance	Cob	V_{CB}=10V, f=1MHz		35		pF
Collector-to-Emitter Saturation Voltage	V_{CE}(sat)	I_C=0.75A, I_B=0.15A			2.0	V
Base-to-Emitter Saturation Voltage	V_{BE}(sat)	I_C=0.75A, I_B=0.15A			1.5	V
Collector-to-Base Breakdown Voltage	$V_{(BR)CBO}$	I_C=1mA, I_E=0	1100			V
Collector-to-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C=5mA, R_{BE}=∞	800			V
Emitter-to-Base Breakdown Voltage	$V_{(BR)EBO}$	I_E=1mA, I_C=0	7			V
Collector-to-Emitter Sustain Voltage	V_{CEX}(sus)	I_C=0.75A, I_{B1}=-I_{B2}=0.15A, L=5mH, clamped	800			V
Turn-On Time	t_{on}	V_{CC}=400V, 5I_{B1}=-2.5I_{B2}=I_C=1A, R_L=400Ω			0.5	μs
Storage Time	t_{stg}	V_{CC}=400V, 5I_{B1}=-2.5I_{B2}=I_C=1A, R_L=400Ω			3.0	μs
Fall Time	t_f	V_{CC}=400V, 5I_{B1}=-2.5I_{B2}=I_C=1A, R_L=400Ω			0.3	μs


* : The $h_{FE}1$ of the 2SC3751 is classified as follows. When specifying the $h_{FE}1$ rank, specify two ranks or more in principle.


Rank	K	L	M
h_{FE}	10 to 20	15 to 30	20 to 40


Switching Time Test Circuit

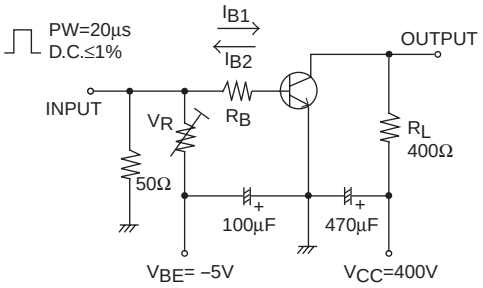

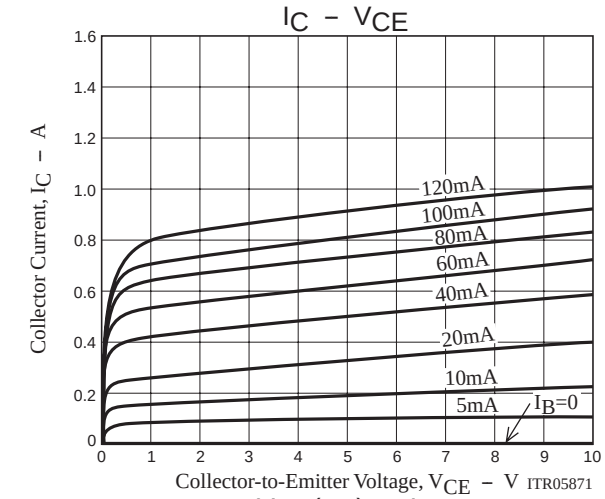


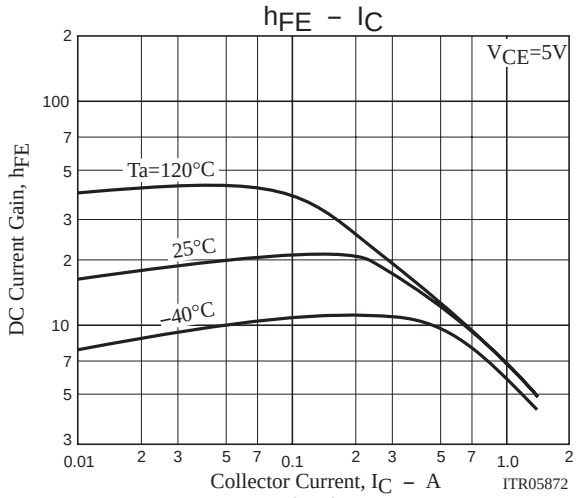

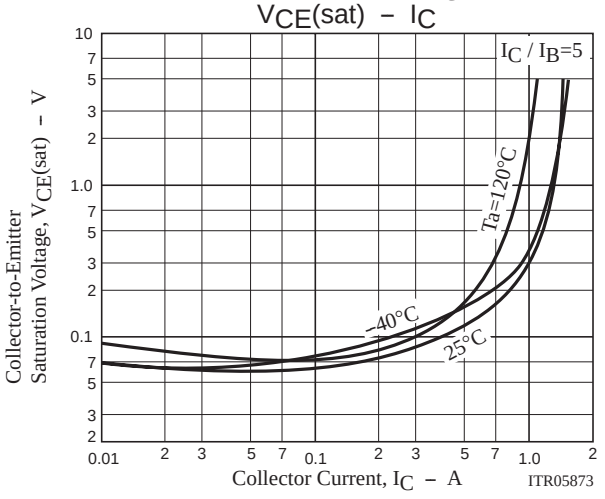


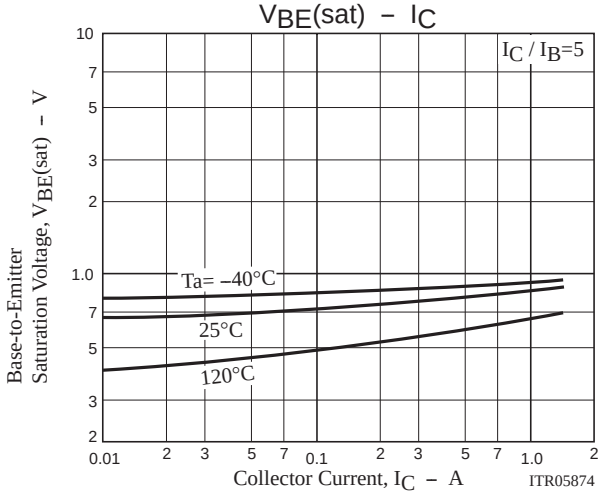


I_C – V_{BE}

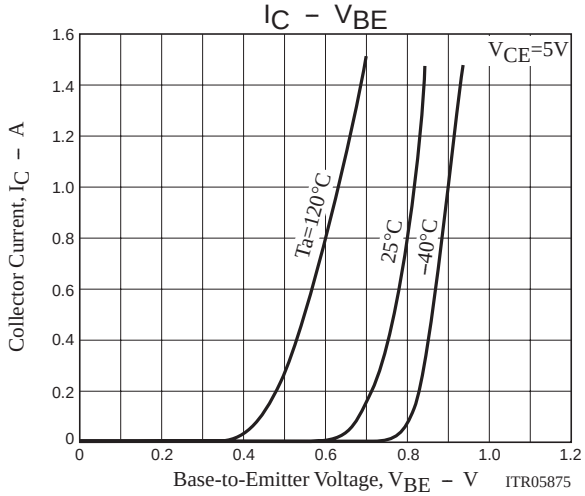


SW Time – I_C

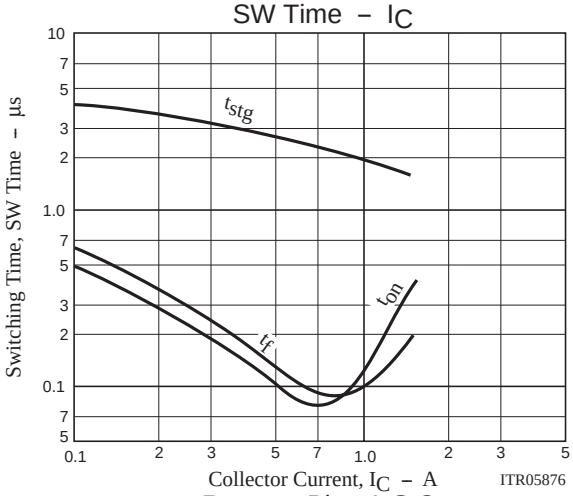


Forward Bias A S O

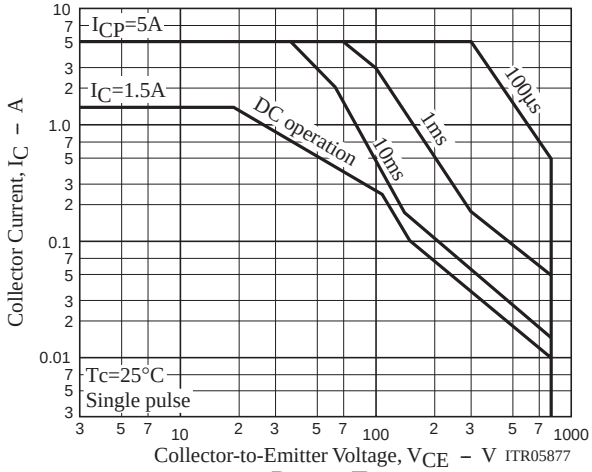

Reverse Bias A S O

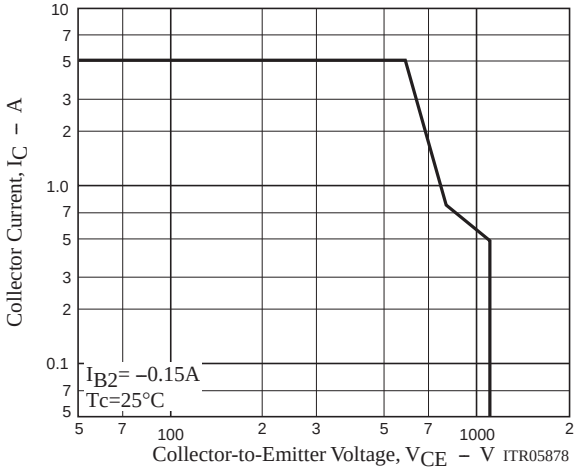

P_C – Tc

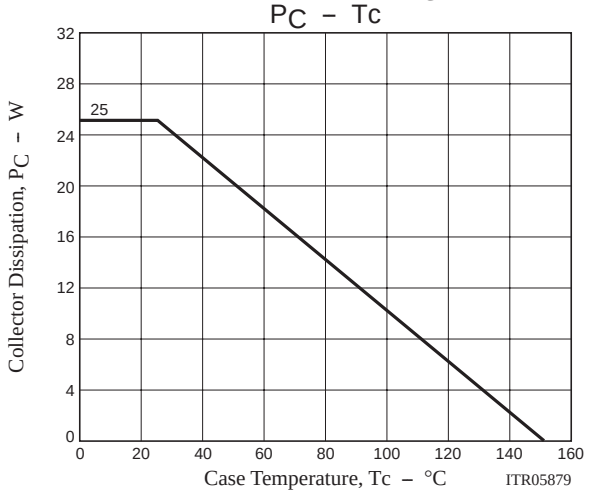

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data,services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of September, 2001. Specifications and information herein are subject to change without notice.