RU75N08

N-Channel Advanced Power MOSFET

Features

- 75V/80A,
  $R_{DS\,(ON)}$=8mΩ V_{GS}=10V I_{DS}=40A
- Ultra Low On-Resistance
- Exceptional dv/dt capability
- Fast Switching and Fully Avalanche Rated
- 100% avalanche tested
- 175°C Operating Temperature
- Lead Free and Green Available

Pin Description



TO-220




TO-220F



TO-263



TO-247



N-Channel MOSFET

Applications

- Switching Application Systems

Absolute Maximum Ratings

Symbol	Parameter		Rating	Unit
Common Ratings (T_A=25°C Unless Otherwise Noted)				
V_{DSS}	Drain-Source Voltage		75	V
V_{GSS}	Gate-Source Voltage		±25	
T_J	Maximum Junction Temperature		175	°C
T_{STG}	Storage Temperature Range		-55 to 175	°C
I_S	Diode Continuous Forward Current	T_C=25°C	80	A
Mounted on Large Heat Sink				
I_{DP}	300μs Pulse Drain Current Tested	T_C=25°C	360①	A
I_D	Continuous Drain Current	T_C=25°C	80	A
		T_C=100°C	76	
P_D	Maximum Power Dissipation	T_C=25°C	280	W
		T_C=100°C	140	
$R_{\theta JC}$	Thermal Resistance-Junction to Case		0.55	°C/W
Drain-Source Avalanche Ratings				
E_{AS}	Avalanche Energy, Single Pulsed		1.2	J

Copyright© Ruichips Semiconductor Co., Ltd

Electrical Characteristics (T_A=25°C Unless Otherwise Noted)


Symbol	Parameter	Test Condition	RU75N08			Unit
			Min.	Typ.	Max.	
Static Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V, I_{DS}=250μA	75			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}= 75V, V_{GS}=0V			1	μA
		T_J=85°C			30	
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_{DS}=250μA	2	3	4	V
I_{GSS}	Gate Leakage Current	V_{GS}=±25V, V_{DS}=0V			±100	nA
$R_{DS(ON)}$ ②	Drain-Source On-state Resistance	V_{GS}= 10V, I_{DS}=40A		8	11	mΩ
Diode Characteristics						
V_{SD} ②	Diode Forward Voltage	I_{SD}=20 A, V_{GS}=0V		0.83	1.2	V
t_{rr}	Reverse Recovery Time	I_{SD}=40A, dI_{SD}/dt=100A/μs		50		ns
q_{rr}	Reverse Recovery Charge			110		nC
Dynamic Characteristics ③						
R_G	Gate Resistance	V_{GS}=0V,V_{DS}=0V,F=1MHz		1.4		Ω
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}= 30V, Frequency=1.0MHz		3400		pF
C_{oss}	Output Capacitance			450		
C_{rss}	Reverse Transfer Capacitance			170		
$t_{d(ON)}$	Turn-on Delay Time	V_{DD}=35V, R_L=35Ω, I_{DS}= 1A, V_{GEN}= 10V, R_G=7Ω		22	40	ns
t_r	Turn-on Rise Time			11	20	
$t_{d(OFF)}$	Turn-off Delay Time			70	130	
t_f	Turn-off Fall Time			62	120	
Gate Charge Characteristics ③						
Q_g	Total Gate Charge	V_{DS}=60V, V_{GS}= 10V, I_{DS}=80A		75	110	nC
Q_{gs}	Gate-Source Charge			18		
Q_{gd}	Gate-Drain Charge			25		

Notes: ①Current limited by Safe operating area.
②Pulse test ; Pulse width≤300μs, duty cycle≤2%.
③Guaranteed by design, not subject to production testing.


Copyright© Ruichips Semiconductor Co., Ltd

Typical Characteristics


Power Dissipation

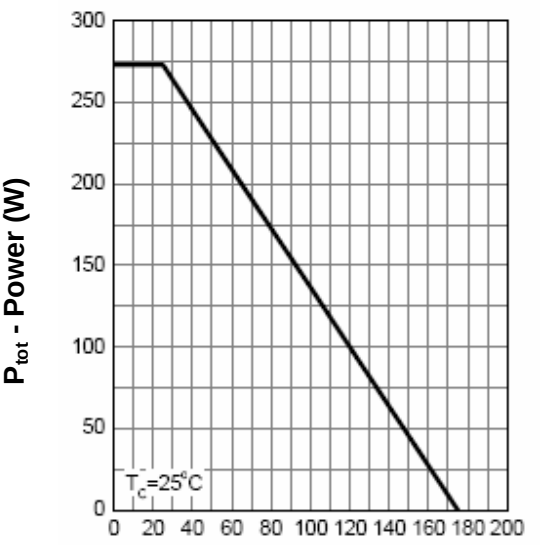


Drain Current

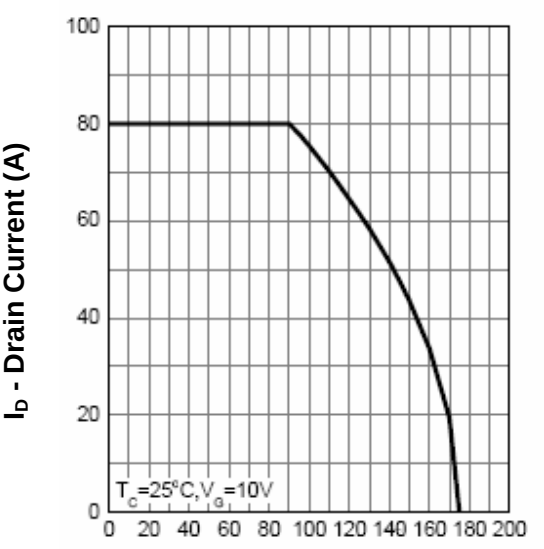

Safe Operation Area

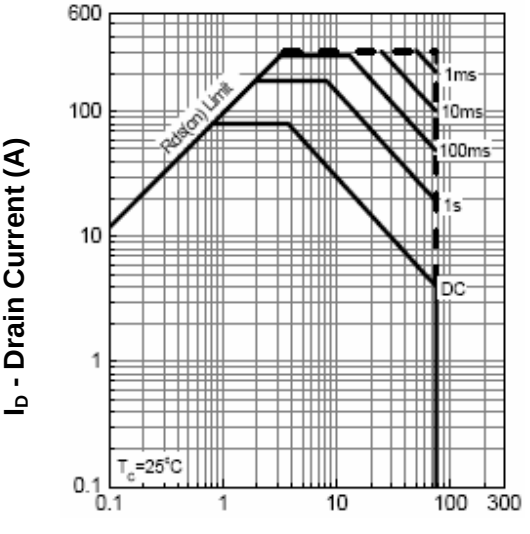


Thermal Transient Impedance

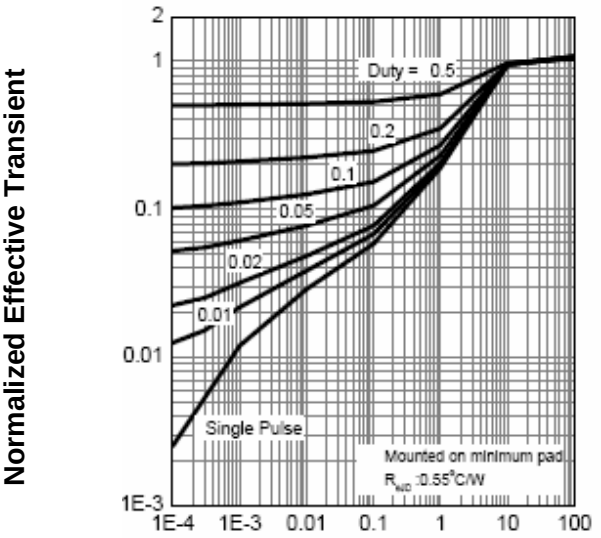


Typical Characteristics


Output Characteristics

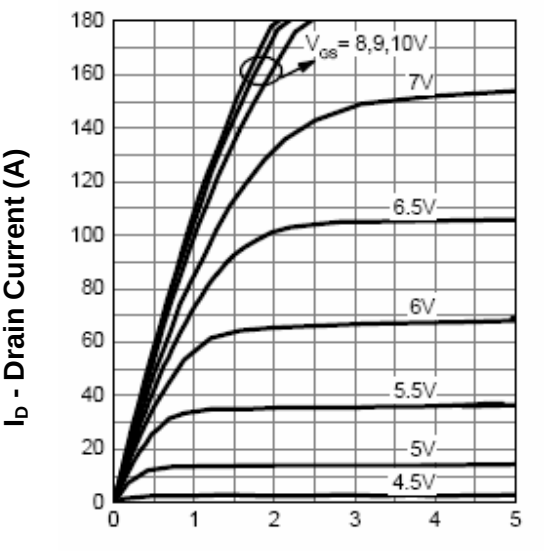


Drain-Source On Resistance

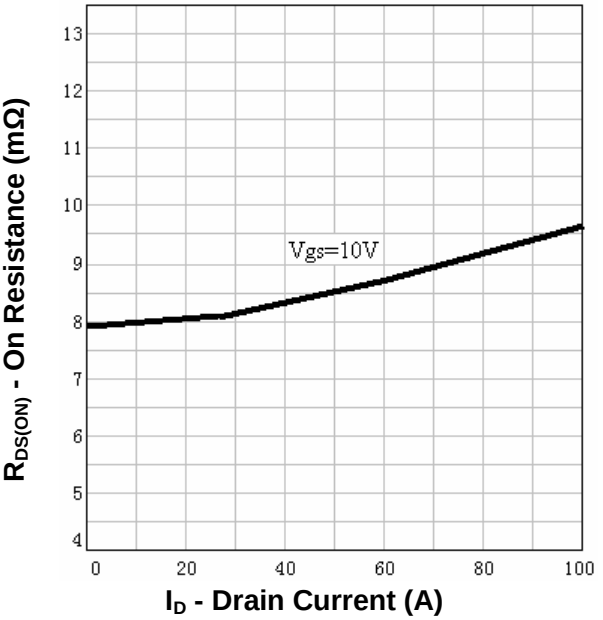

Drain-Source On Resistance

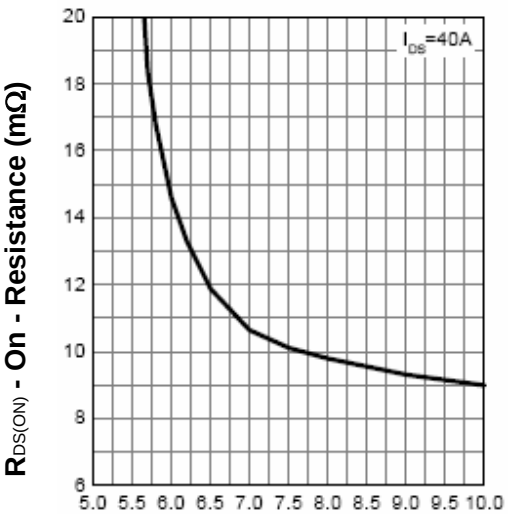


Gate Threshold Voltage

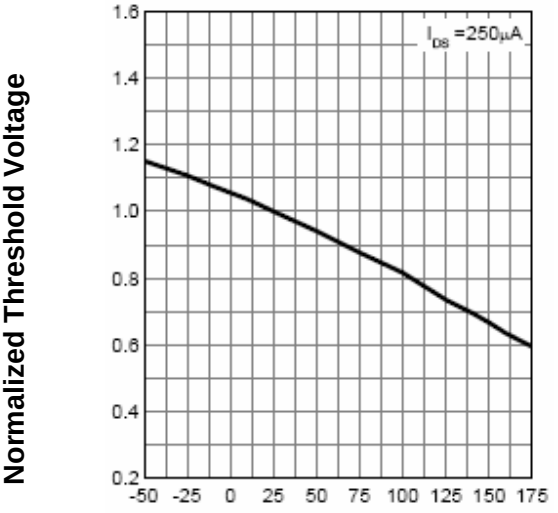


Typical Characteristics

Drain-Source On Resistance

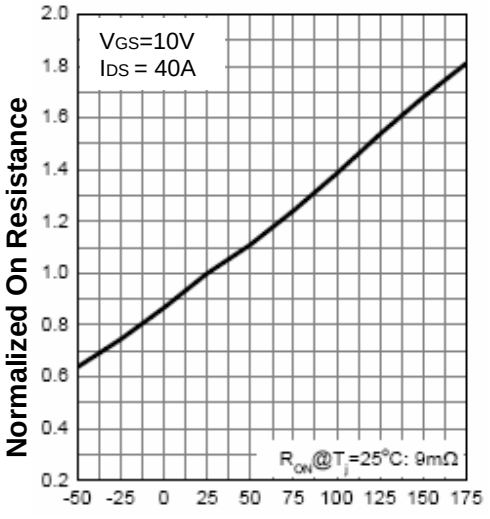


T_j - Junction Temperature (°C)

Source-Drain Diode Forward

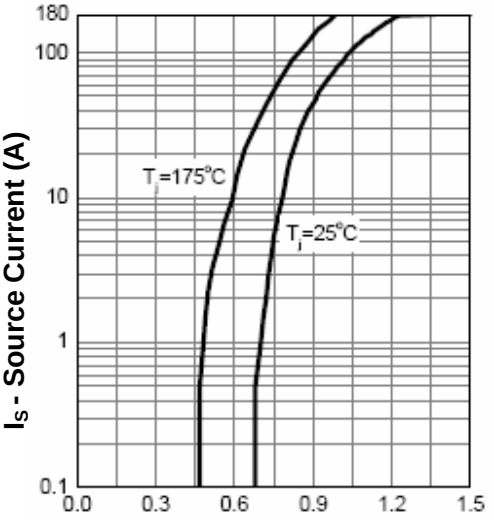


V_{SD} - Source-Drain Voltage (V)

Capacitance

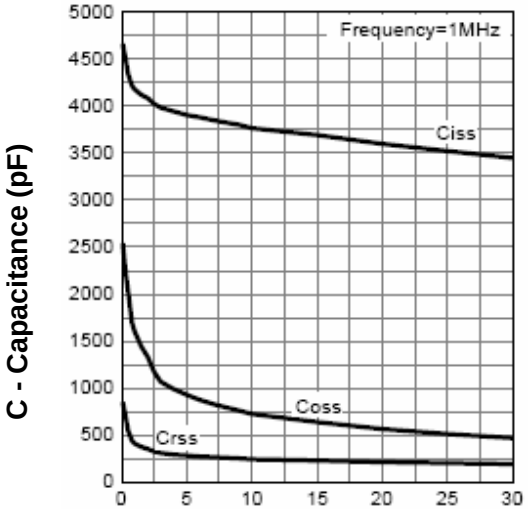


V_{DS} - Drain-Source Voltage (V)

Gate Charge

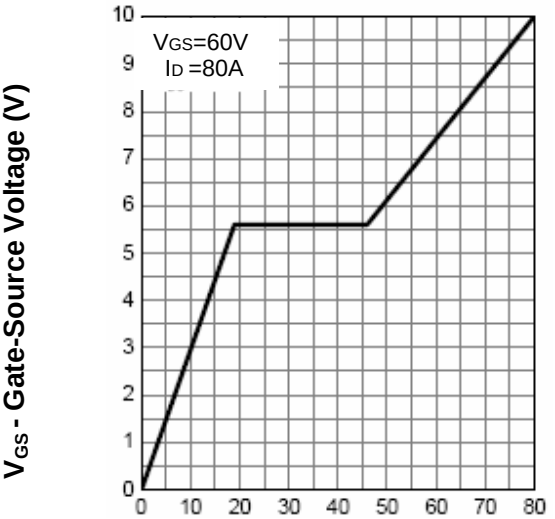


Q_G - Gate Charge (nC)

Avalanche Test Circuit and Waveforms

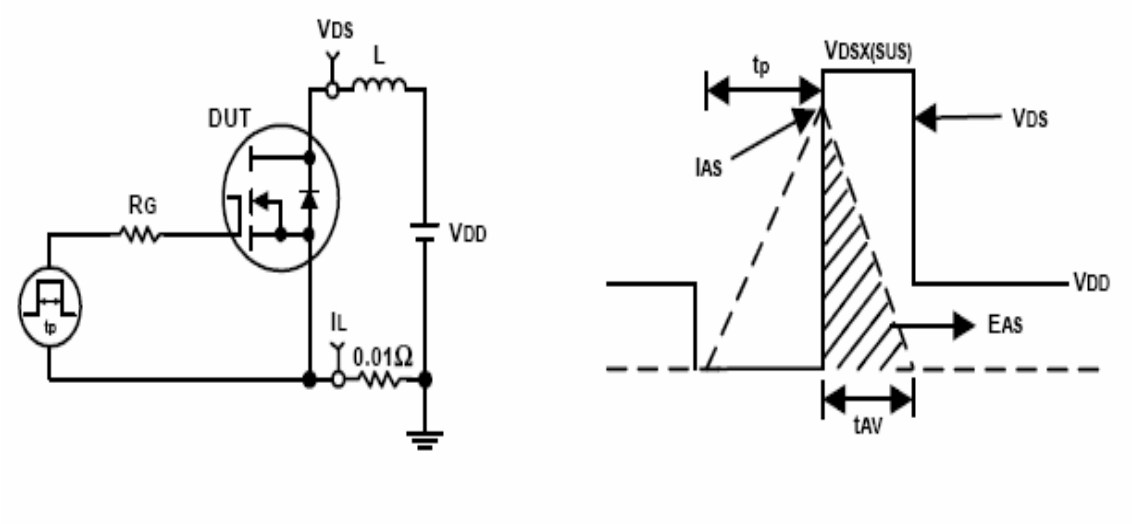

Switching Time Test Circuit and Waveforms

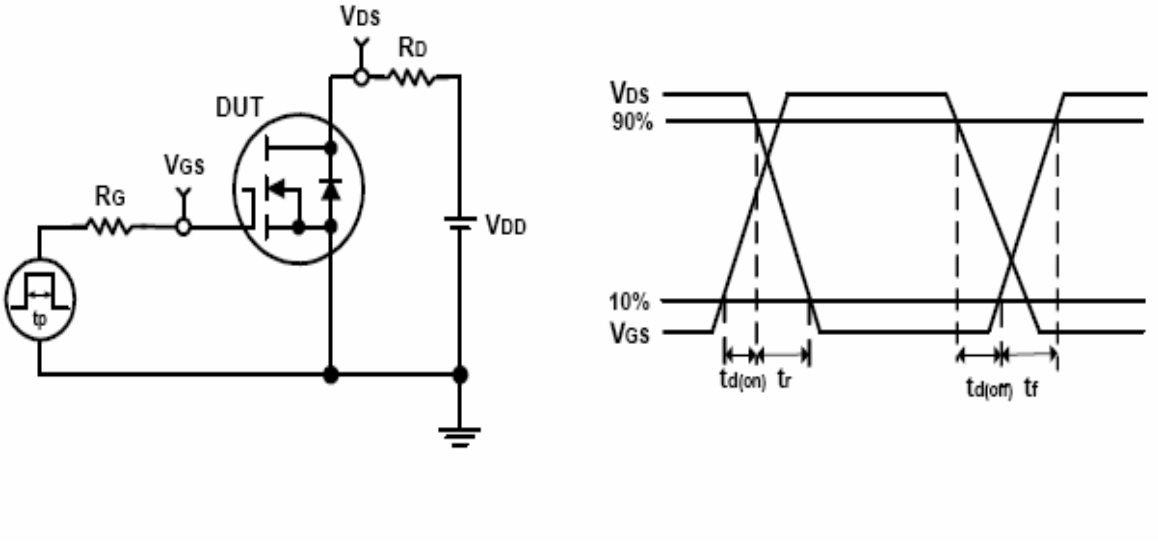

Ordering and Marking Information

RU75N08

Package (Available)

R : TO-220; S: TO-263 ; P: TO-220F Q:TO-247

Operating Temperature Range

C : -55 to 175 ºC

Assembly Material

G : Green & Lead Free


Packaging

T : TUBE

TR : Tape & Reel

Package Information

TO-220FB-3L

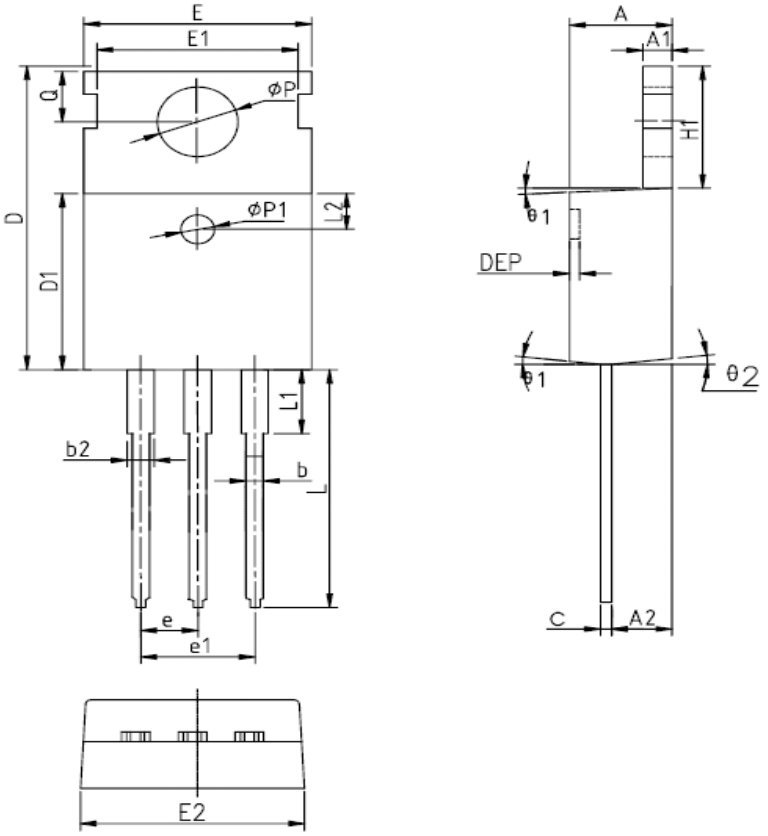


SYMBOL	MM			INCH			SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX		MIN	NOM	MAX	MIN	NOM	MAX
A	4.40	4.57	4.70	0.173	0.180	0.185	Øp1	1.40	1.50	1.60	0.055	0.059	0.063
A1	1.27	1.30	1.33	0.050	0.051	0.052	e	2.54BSC			0.1BSC		
A2	2.35	2.40	2.50	0.093	0.094	0.098	e1	5.08BSC			0.2BSC		
b	0.77	-	0.90	0.030	-	0.035	H1	6.40	6.50	6.60	0.252	0.256	0.260
b2	1.23	-	1.36	0.048	-	0.054	L	12.75	-	13.17	0.502	-	0.519
C	0.48	0.50	0.52	0.019	0.020	0.021	L1	-	-	3.95	-	-	0.156
D	15.40	15.60	15.80	0.606	0.614	0.622	L2	2.50REF.			0.098REF.		
D1	9.00	9.10	9.20	0.354	0.358	0.362	Øp	3.57	3.60	3.63	0.141	0.142	0.143
DEP	0.05	0.10	0.20	0.002	0.004	0.008	Q	2.73	2.80	2.87	0.107	0.110	0.113
E	9.70	9.90	10.10	0.382	0.389	0.398	θ 1	5°	7°	9°	5°	7°	9°
E1	-	8.70	-	-	0.343	-	θ 2	1°	3°	5°	1°	3°	5°
E2	9.80	10.00	10.20	0.386	0.394	0.401							

ALL DIMENSIONS REFER TO JEDEC STANDARD
DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS

Copyright© Ruichips Semiconductor Co., Ltd

TO-263-2L

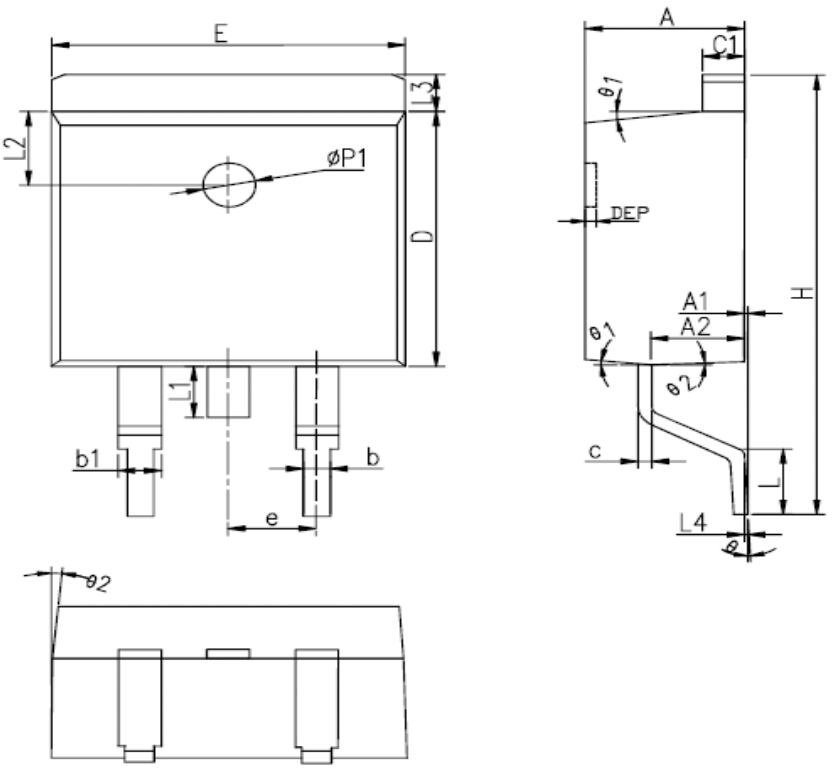


SYMBOL	MM			INCH			SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX		MIN	NOM	MAX	MIN	NOM	MAX
A	4.40	4.57	4.70	0.173	0.180	0.185	L	2.00	2.30	2.60	0.079	0.090	0.102
A1	0	0.10	0.25	0	0.004	0.010	L3	1.17	1.27	1.40	0.046	0.050	0.055
A2	2.59	2.69	2.79	0.102	0.106	0.110	L1	-	-	1.70	-	-	0.067
b	0.77	-	0.90	0.030	-	0.035	L4	0.25BSC			0.01BSC		
b1	1.23	-	1.36	0.048	-	0.052	L2	2.50REF.			0.098REF.		
c	0.34	-	0.47	0.013	-	0.019	θ	0°	-	8°	0°	-	8°
C1	1.22	-	1.32	0.048	-	0.052	θ 1	5°	7°	9°	5°	7°	9°
D	8.60	8.70	8.80	0.338	0.343	0.346	θ 2	1°	3°	5°	1°	3°	5°
E	10.00	10.16	10.26	0.394	0.4	0.404	DEP	0.05	0.10	0.20	0.002	0.004	0.008
e	2.54BSC			0.1BSC			Øp1	1.40	1.50	1.60	0.055	0.059	0.063
H	14.70	15.10	15.50	0.579	0.594	0.610							

ALL DIMENSIONS REFER TO JEDEC STANDARD
DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS

Copyright© Ruichips Semiconductor Co., Ltd

TO-220F-3L

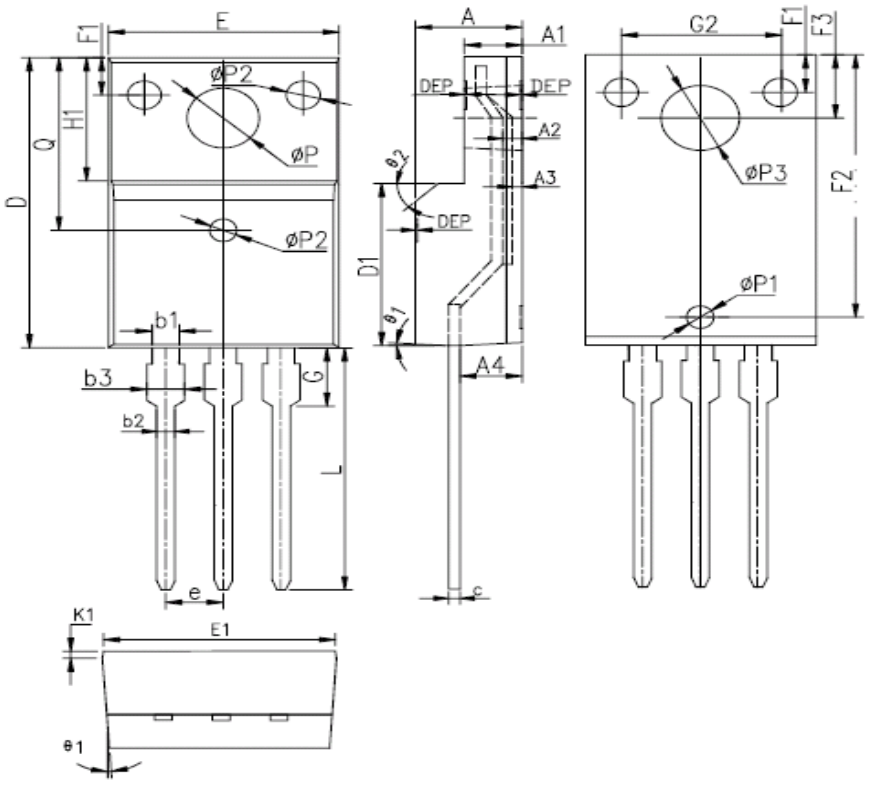


SYMBOL	MM			INCH			SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX		MIN	NOM	MAX	MIN	NOM	MAX
E	9.96	10.16	10.36	0.392	0.400	0.408	Øp3	-	3.450	-	-	0.136	-
A	4.50	4.70	4.90	0.177	0.185	0.193	θ 1	5°	7°	9°	5°	7°	9°
A1	2.34	2.54	2.74	0.092	0.100	0.108	θ 2	-	45°	-	-	45°	-
A2	0.95	1.05	1.15	0.037	0.041	0.045	DEP	0.05	0.10	0.15	0.002	0.004	0.006
A3	0.42	0.52	0.62	0.017	0.020	0.024	F1	1.90	2.00	2.10	0.075	0.079	0.083
A4	2.65	2.75	2.85	0.104	0.108	0.112	F2	13.61	13.81	14.01	0.536	0.544	0.552
c	-	0.50	-	-	0.020	-	F3	3.20	3.30	3.40	0.126	0.130	0.134
D	15.67	15.87	16.07	0.617	0.625	0.633	G	3.25	3.45	3.65	0.128	0.136	0.144
Q	8.80	9.00	9.20	0.346	0.354	0.362	G1	5.90	6.00	6.10	0.232	0.236	0.240
H1	6.48	6.68	6.88	0.255	0.263	0.271	G2	6.90	7.00	7.10	0.272	0.276	0.280
e	2.54BSC			0.1BSC			b1	1.17	1.20	1.24	0.046	0.047	0.048
Øp	-	3.183	-	-	0.125	-	b2	0.77	0.8	0.85	0.030	0.031	0.033
L	12.78	12.98	13.18	0.503	0.511	0.519	b3	1.10	1.30	1.50	0.043	0.051	0.059
D1	8.99	9.19	9.39	0.354	0.362	0.370	E1	9.8	10.00	10.20	0.386	0.394	0.412
Øp1	1.40	1.50	1.60	0.055	0.059	0.063	K1	0.75	0.8	0.85	0.030	0.031	0.033
Øp2	1.15	1.20	1.25	0.045	0.047	0.049							

ALL DIMENSIONS REFER TO JEDEC STANDARD
DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS

Copyright© Ruichips Semiconductor Co., Ltd

TO-247

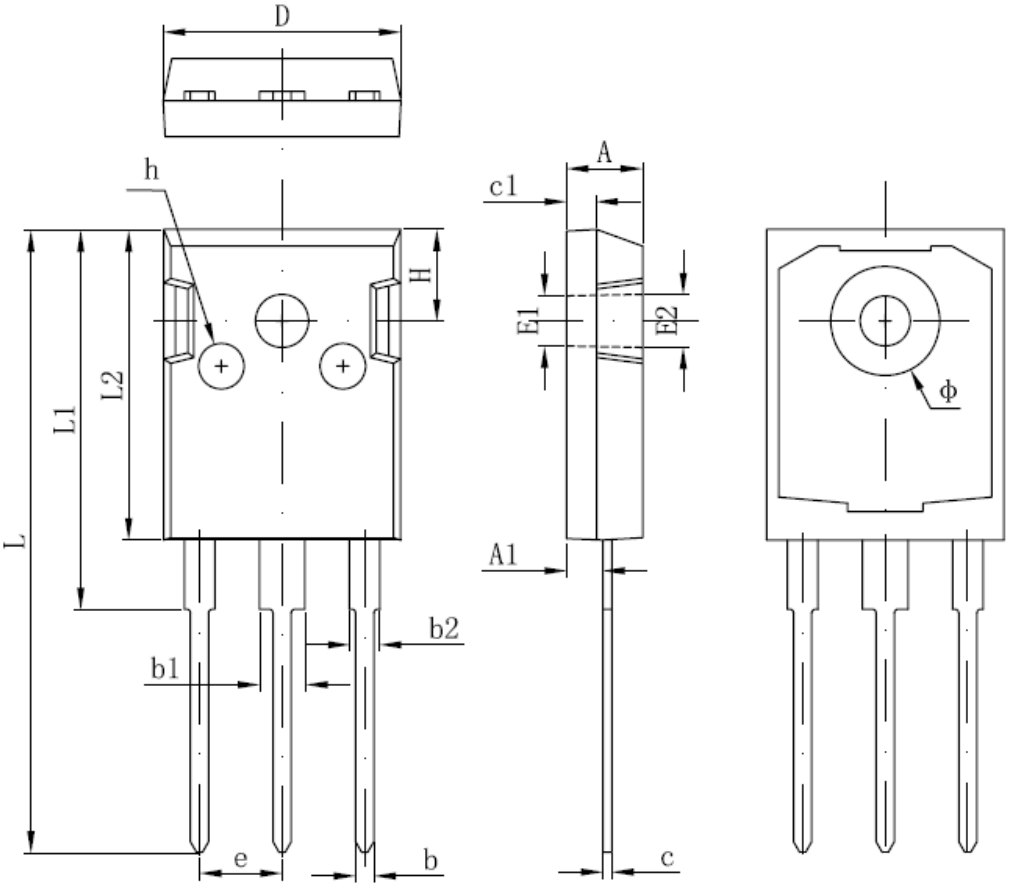

SYMBOL	MM		INCH		SYMBOL	MM		INCH	
	MIN	MAX	MIN	MAX		MIN	MAX	MIN	MAX
A	4.850	5.150	0,191	0.200	E2	3.600 REF		0.142 REF	
A1	2.200	2.600	0.087	0.102	L	40.900	41.300	1.610	1.626
B	1.000	1.400	0.039	0.055	L1	24.800	25.100	0.976	0.988
b1	2.800	3.200	0.110	0.126	L2	20.300	20.600	0.799	0.811
b2	1.800	2.200	0.071	0.087	Φ	7.100	7.300	0.280	0.287
c	0.500	0.700	0.020	0.028	e	5.450 TYP		0.215 TYP	
c1	1.900	2.100	0.075	0.083	H	5.980 REF.		0.235 REF.	
D	15.450	15.750	0.608	0.620	h	0.000	0.300	0.000	0.012
E1	3.500 REF.		0.138 REF.						

ALL DIMENSIONS REFER TO JEDEC STANDARD
DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS

Copyright© Ruichips Semiconductor Co., Ltd

Customer Service

Worldwide Sales and Service:
Sales@ruichips.com

Technical Support:
Technical@ruichips.com

Investor Relations Contacts:
Investor@ruichips.com

Marcom Contact:
Marcom@ruichips.com

Editorial Contact:
Editorial@ruichips.com

HR Contact:
HR@ruichips.com

Legal Contact:
Legal@ruichips.com

Shen Zhen RUICHIPS Semiconductor CO., LTD
Room 501, the 5floor An Tong Industrial Building,
NO.207 Mei Hua Road Fu Tian Area Shen Zhen City, CHINA

TEL: (86-755) 8311-5334
FAX: (86-755) 8311-4278
E-mail: Sales-SZ@ruichips.com