SHINDENGEN

Switching Power Transistor

HFX Series


2SC4236
(T6W80HFX)

6A NPN

OUTLINE DIMENSIONS

Case : MTO-3P

Unit : mm

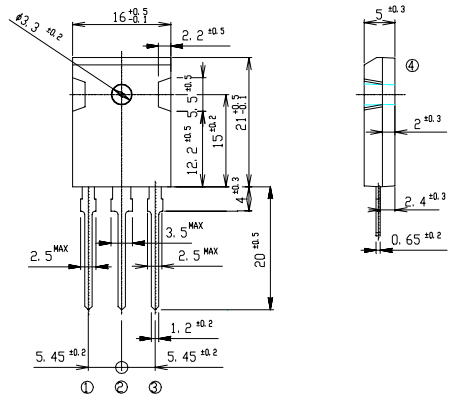

①: B
②: C
③: E
④: C

RATINGS


●Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		−55～150	℃
Junction Temperature	Tj		150	℃
Collector to Base Voltage	V_{CBO}		1200	V
Collector to Emitter Voltage	V_{CEO}		800	V
Emitter to Base Voltage	V_{EBO}		7	V
Collector Current DC	I_C		6	A
Collector Current Peak	I_{CP}		12	
Base Current DC	I_B		3	A
Base Current Peak	I_{BP}		6	
Total Transistor Dissipation	P_T	Tc = 25℃	100	W
Mounting Torque	TOR	(Recommended torque : 0.5N･m)	0.8	N･m

●Electrical Characteristics (Tc=25℃)


Item	Symbol	Conditions	Ratings	Unit
Collector to Emitter Sustaining Voltage	V_{CEO}(sus)	I_C = 0.2A	Min 800	V
Collector Cutoff Current	I_{CBO}	At rated Voltage	Max 0.1	mA
	I_{CEO}		Max 0.1	
Emitter Cutoff Current	I_{EBO}	At rated Voltage	Max 0.1	mA
DC Current Gain	h_{FE}	V_{CE} = 5V, I_C = 3A	Min 8	
	h_{FEL}	V_{CE} = 5V, I_C = 1mA	Min 7	
Collector to Emitter Saturation Voltage	V_{CE}(sat)	I_C = 3A	Max 1.0	V
Base to Emitter Saturation Voltage	V_{BE}(sat)	I_B = 0.6A	Max 1.5	V
Thermal Resistance	θ jc	Junction to case	Max 1.25	℃/W
Transition Frequency	f_T	V_{CE} = 10V, I_C = 0.6A	TYP 8	MHz
Turn on Time	ton	I_C = 3A	Max 0.5	
Storage Time	ts	I_{B1} = 0.6A, I_{B2} = 1.2A	Max 3.5	μ s
Fall Time	tf	R_L = 85Ω , V_{BB2} = 4V	Max 0.3	

Copyright & Copy;2000 Shindengen Electric Mfg.Co.Ltd

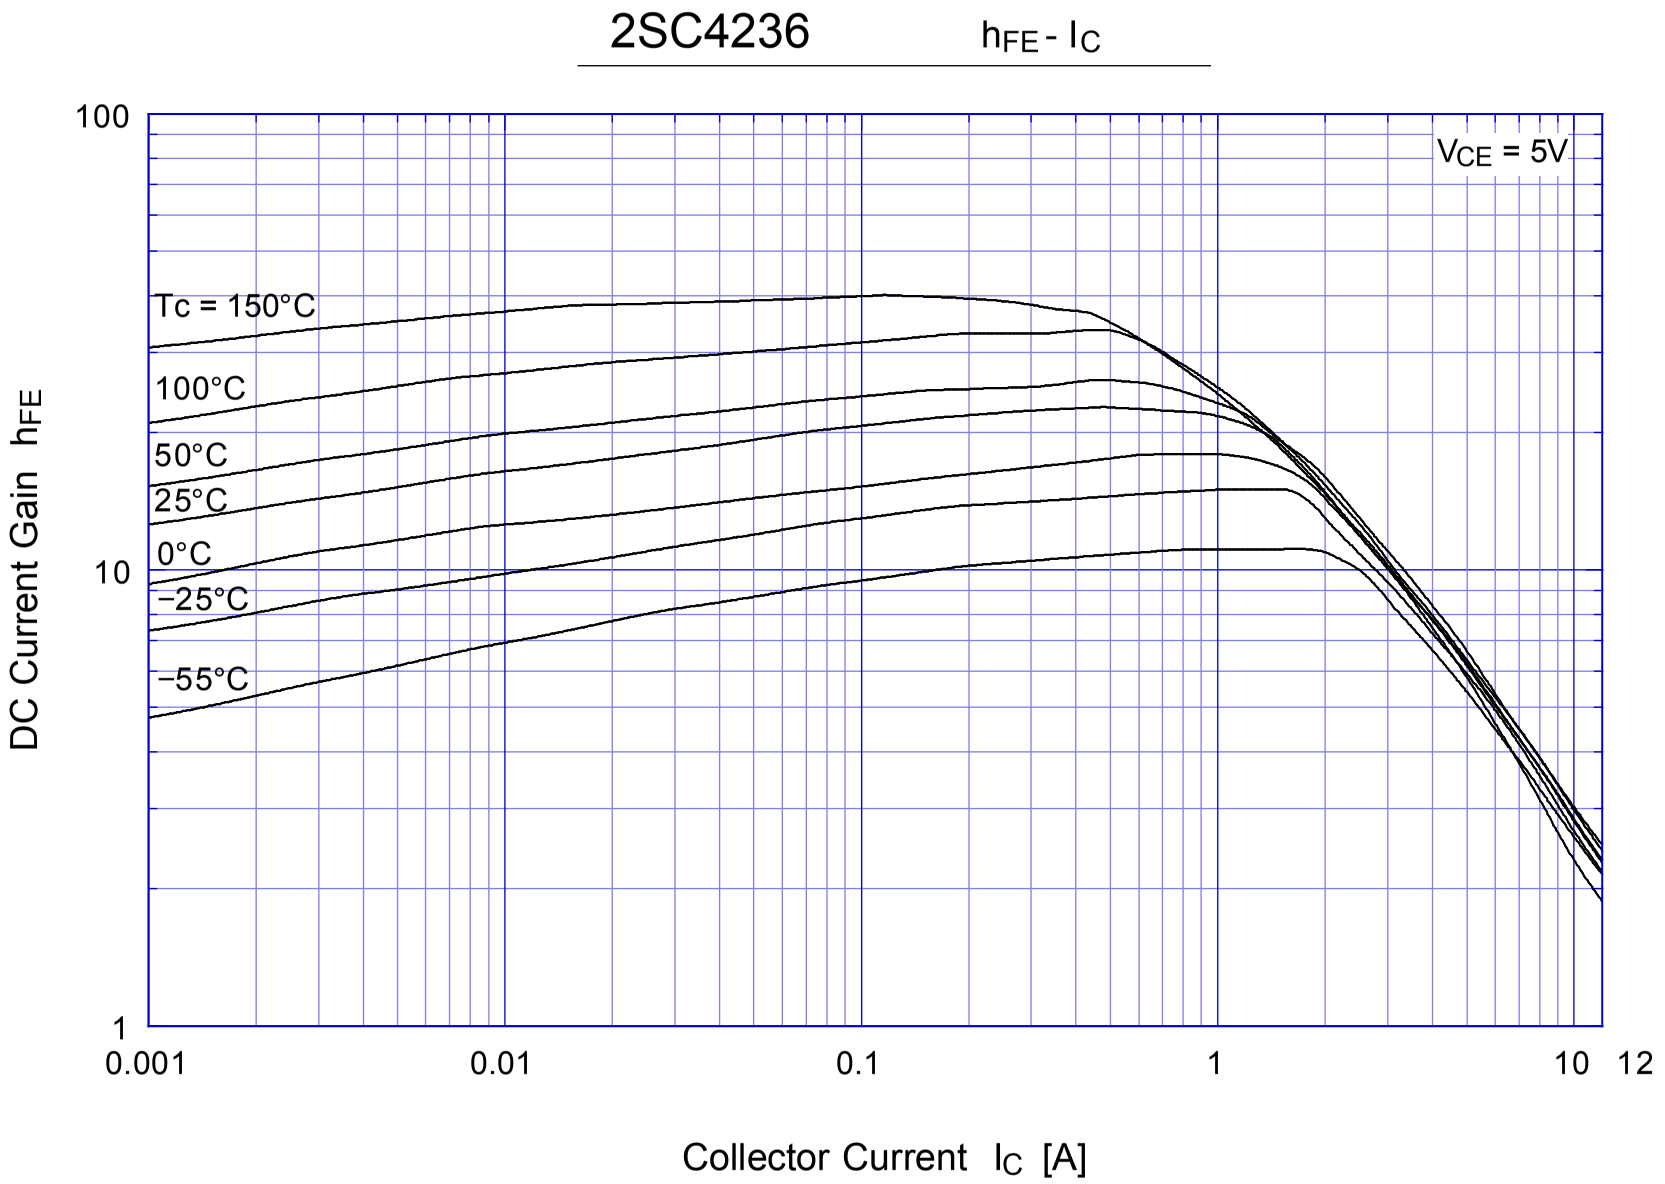

2SC4236
hFE - IC
VCE = 5V
Tc = 150°C
100°C
50°C
25°C
0°C
−25°C
−55°C
100
10
1
0.001
0.01
0.1
1
10
12
DC Current Gain hFE
Collector Current IC [A]

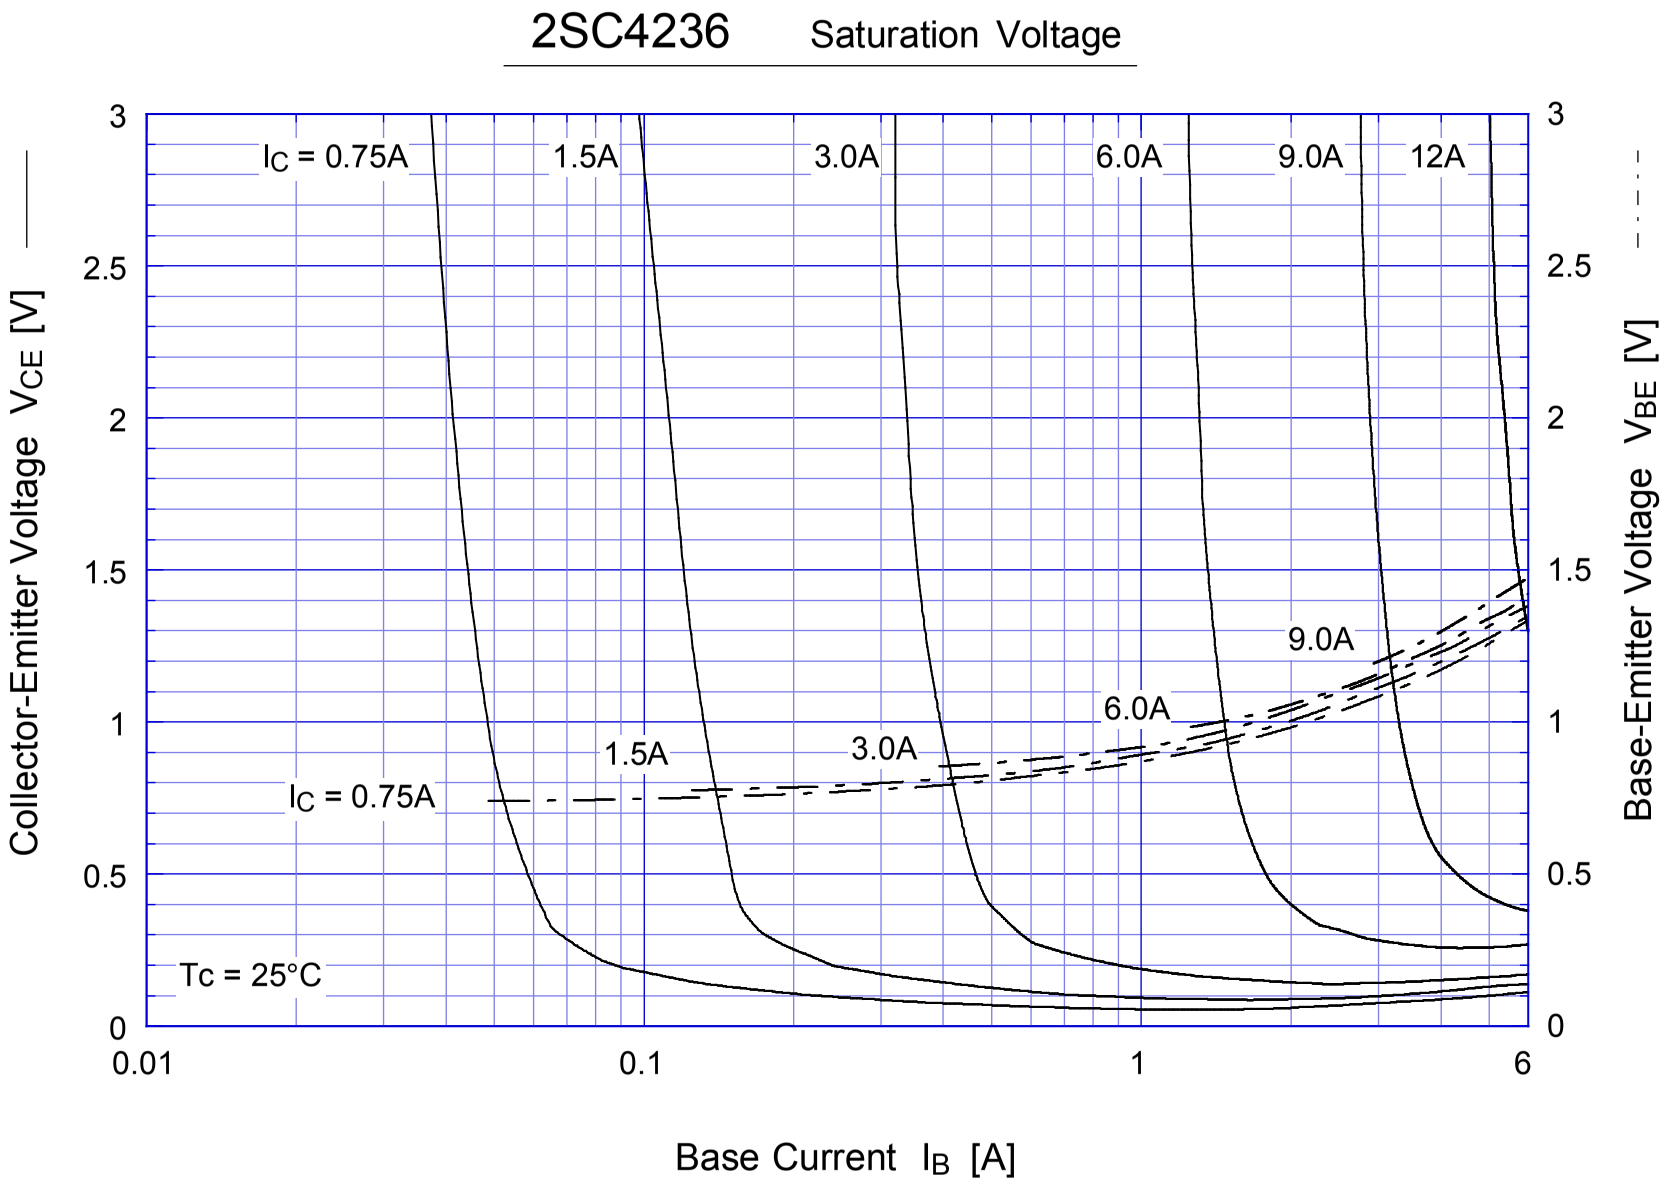
2SC4236 Saturation Voltage
Collector-Emitter Voltage V_{CE} [V]
Base-Emitter Voltage V_{BE} [V]
Base Current I_B [A]
I_C = 0.75A
1.5A
3.0A
6.0A
9.0A
12A
Tc = 25°C
0
0.5
1
1.5
2
2.5
3
0.01
0.1
1
6


2SC4236 Switching Time - I_C

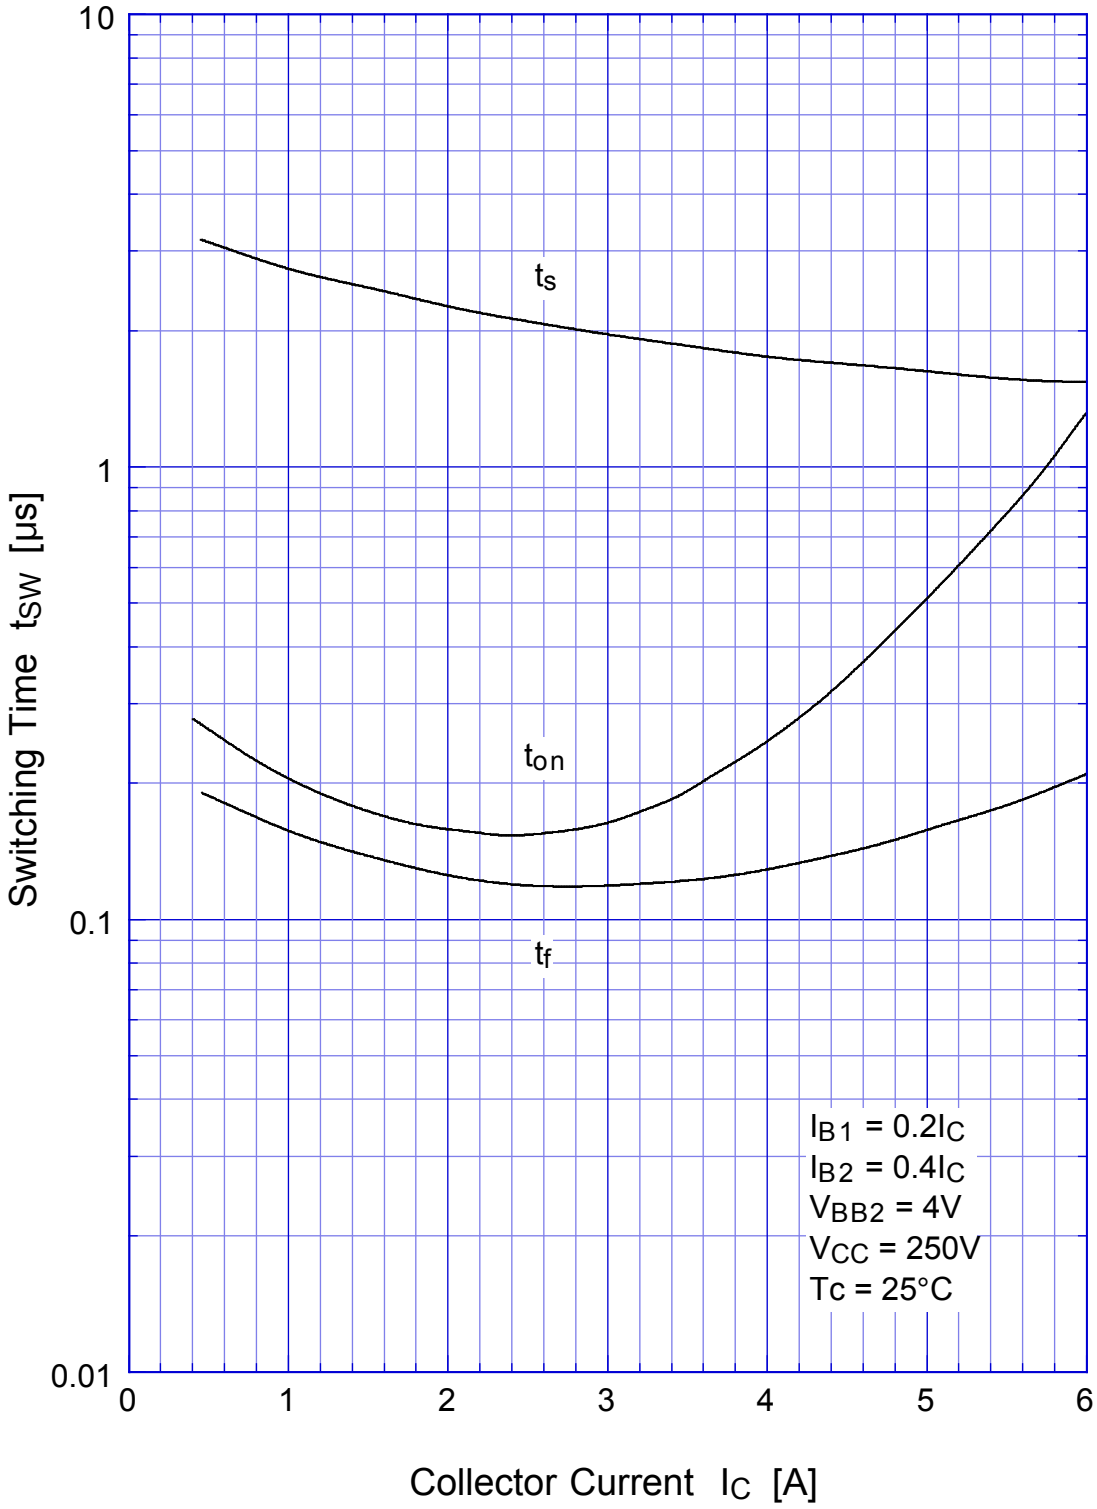


2SC4236 Switching Time - V_{CC}

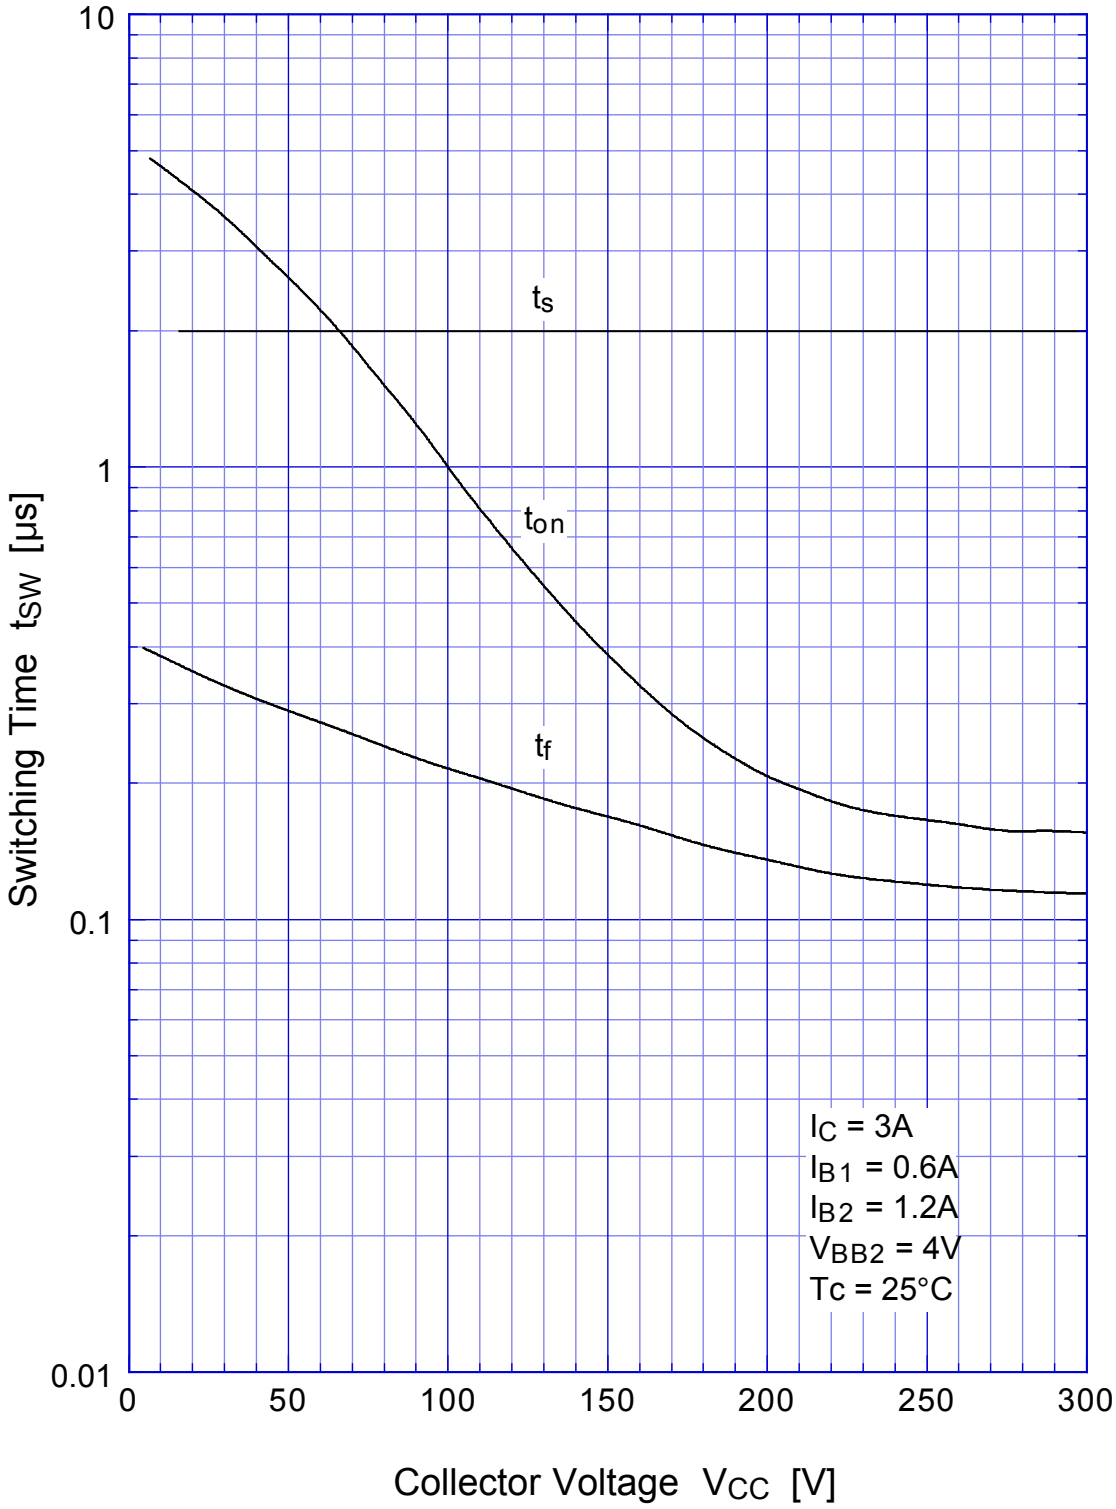


2SC4236 Switching Time - Tc

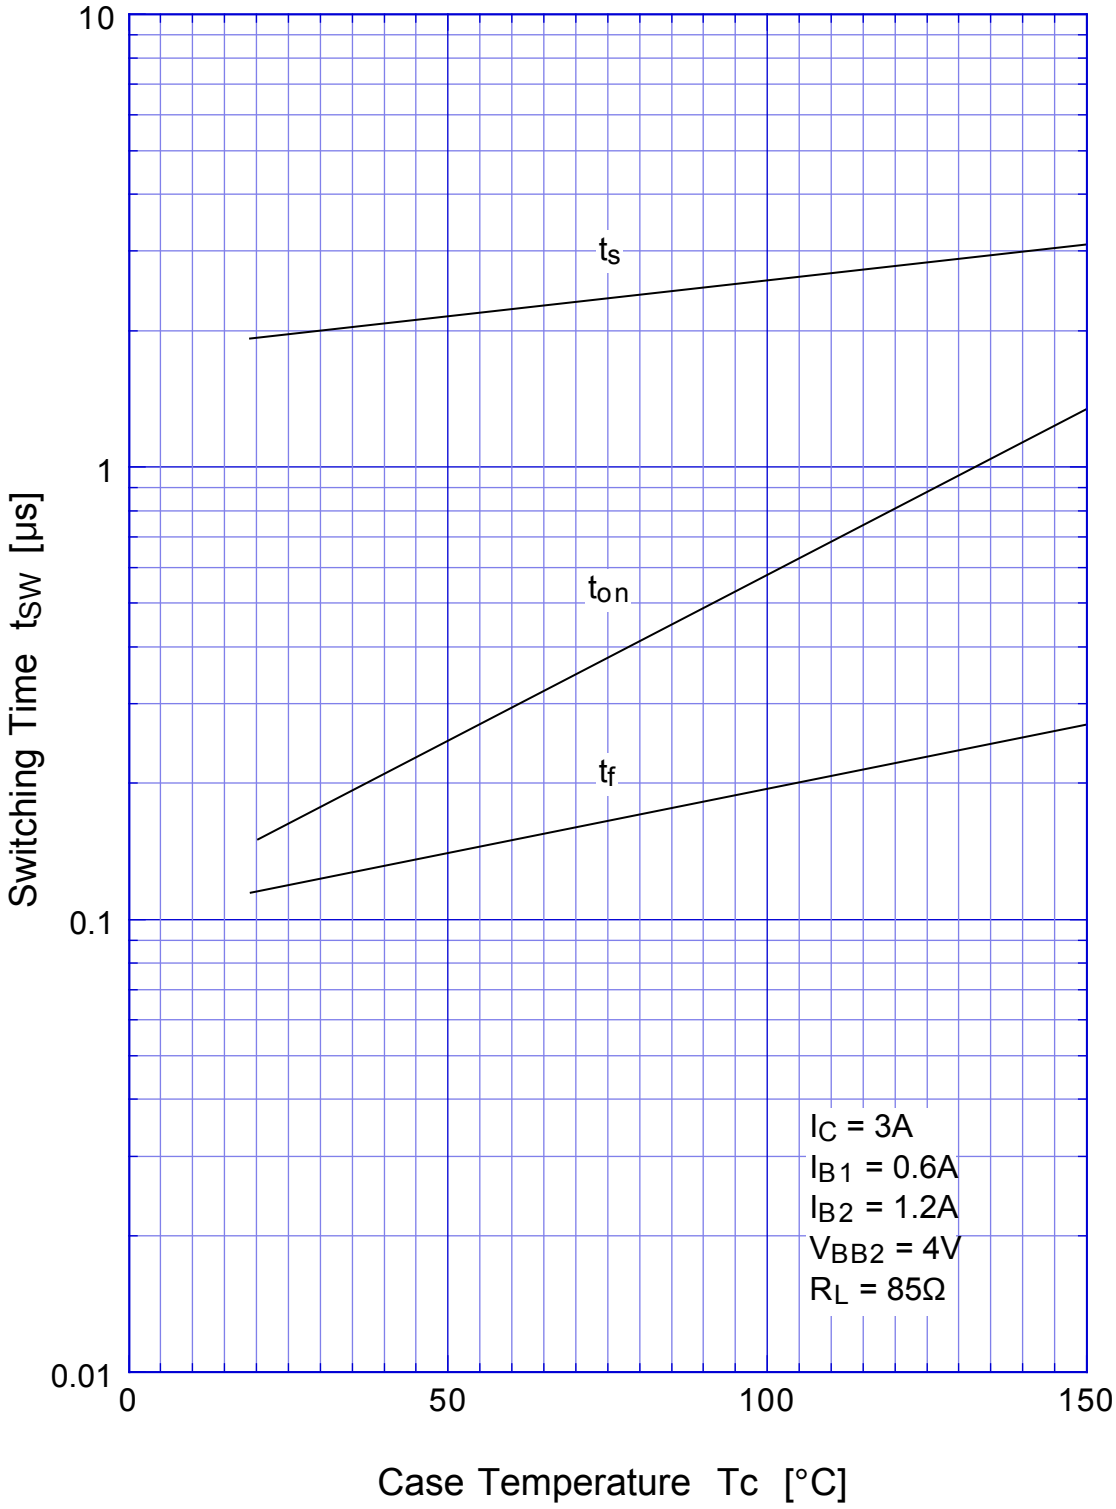



2SC4236 L-Load Switching Time - I_C

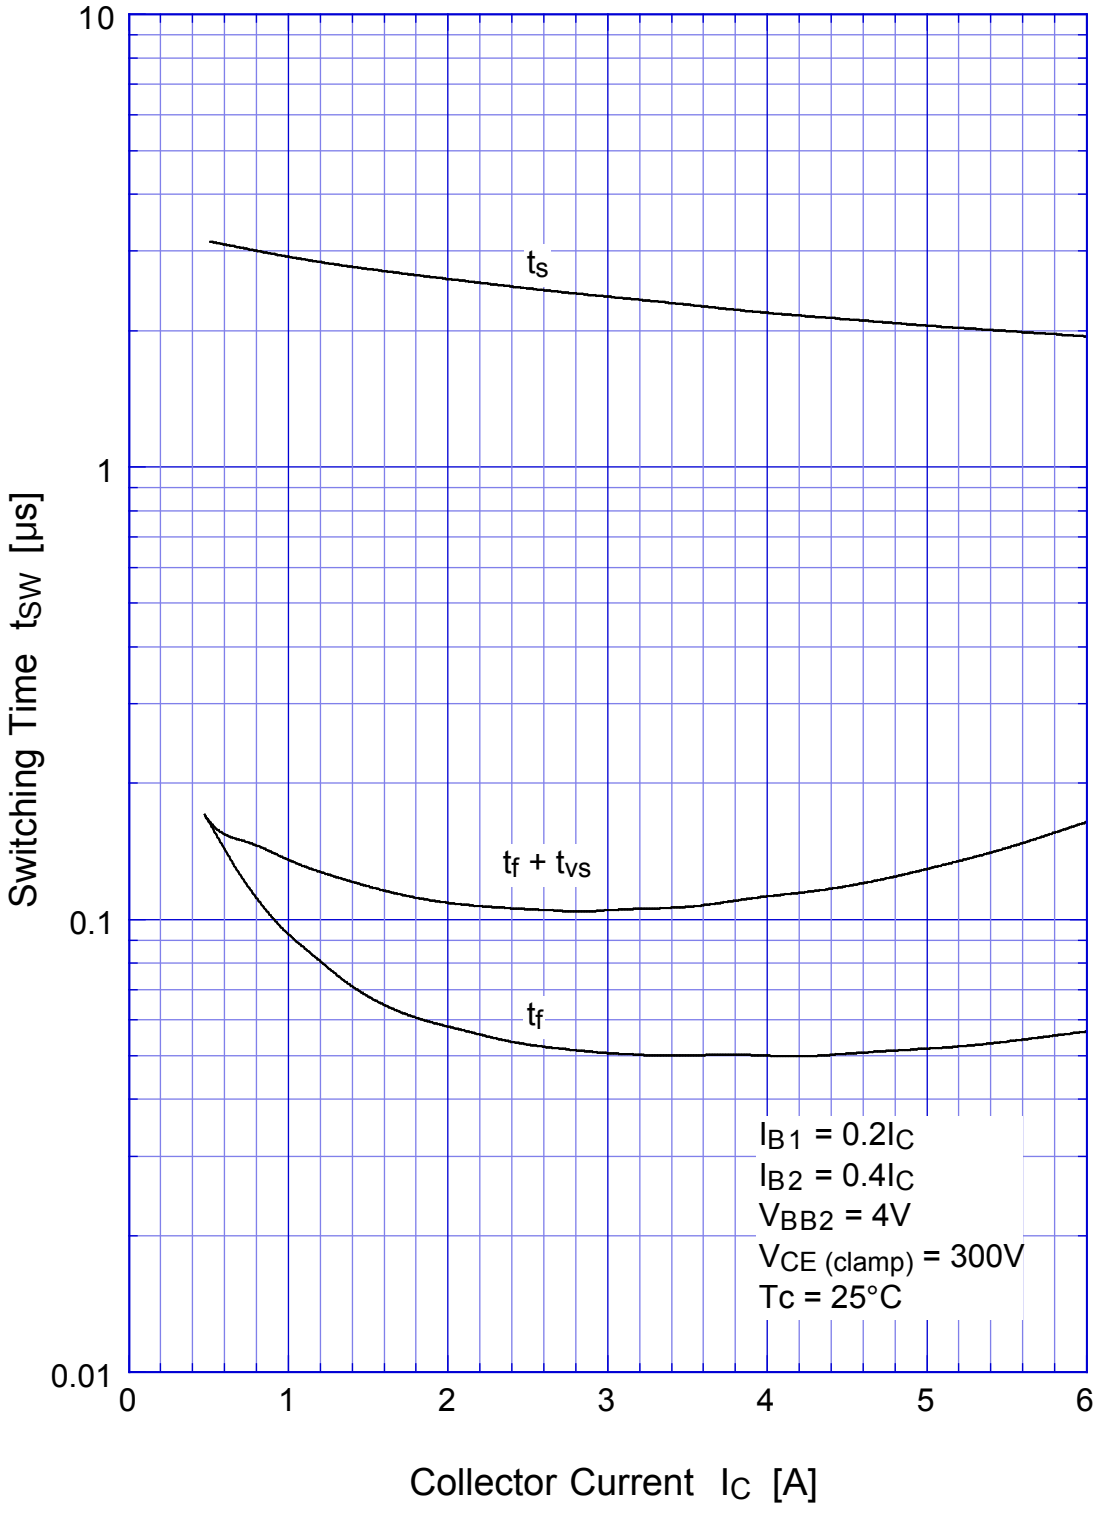



2SC4236 L-Load Switching Time - I_C (At High Temperature)

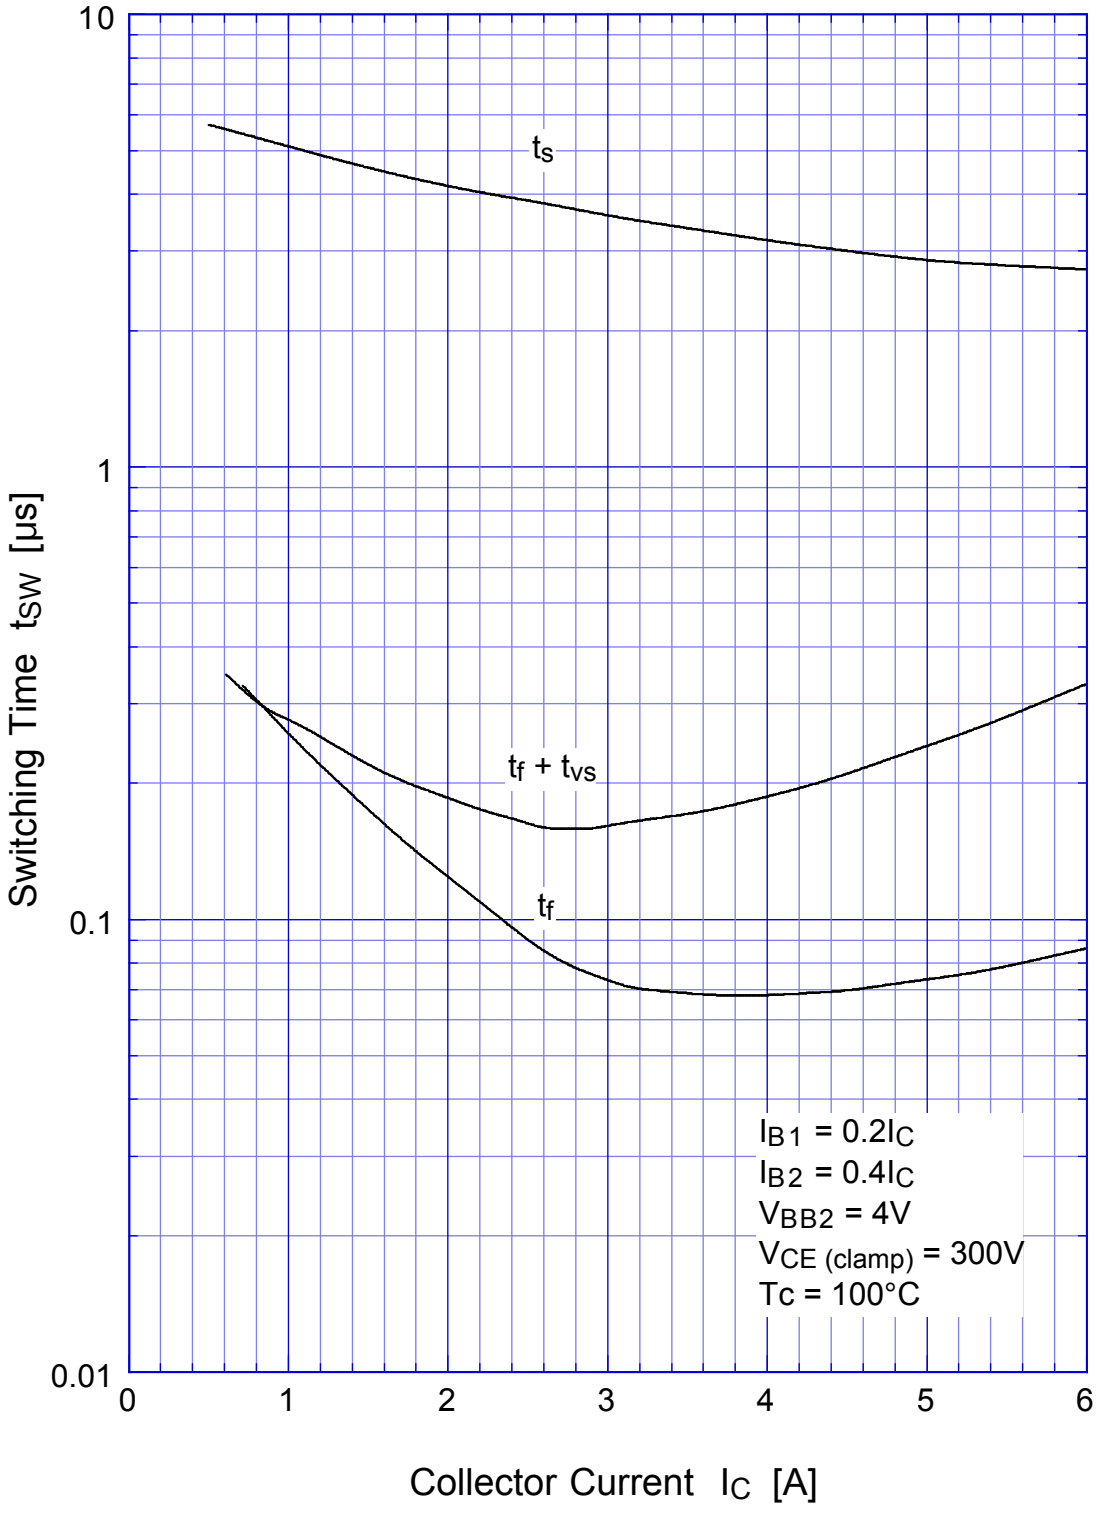

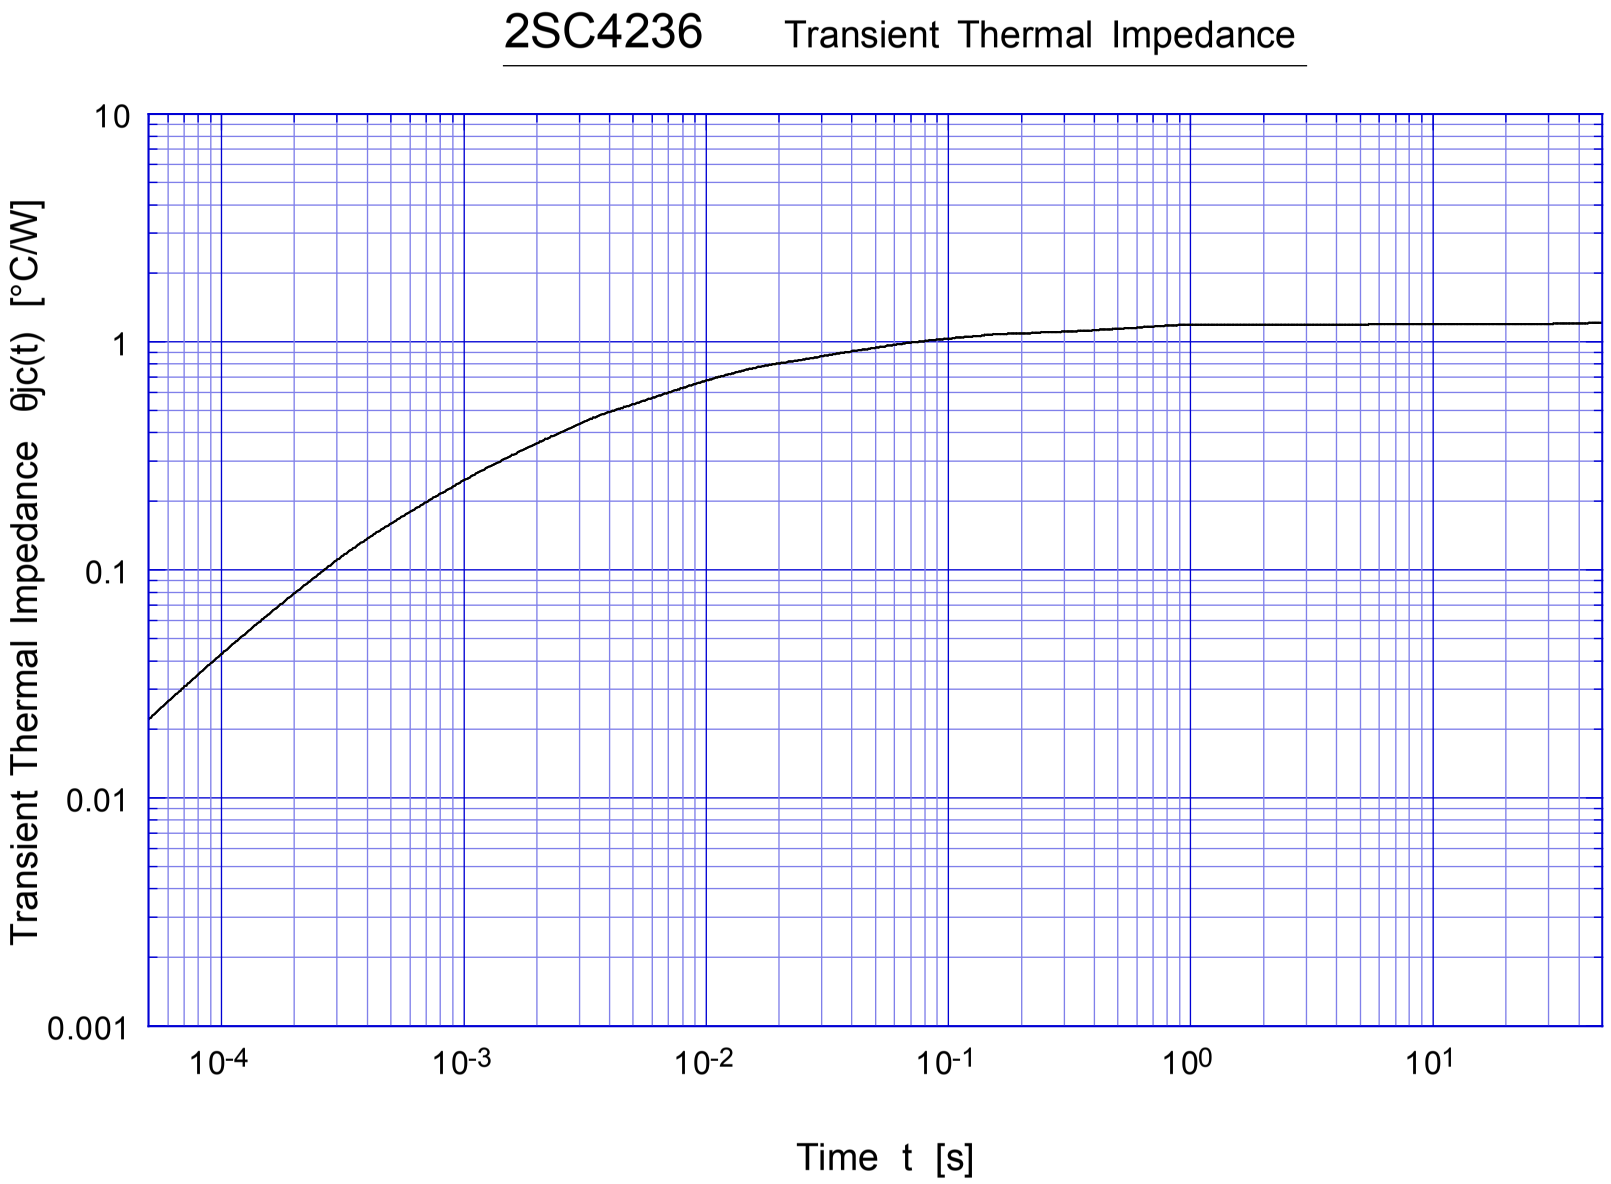
2SC4236 Transient Thermal Impedance
Transient Thermal Impedance θjc(t) [°C/W]
10
1
0.1
0.01
0.001
10-4
10-3
10-2
10-1
100
101
Time t [s]

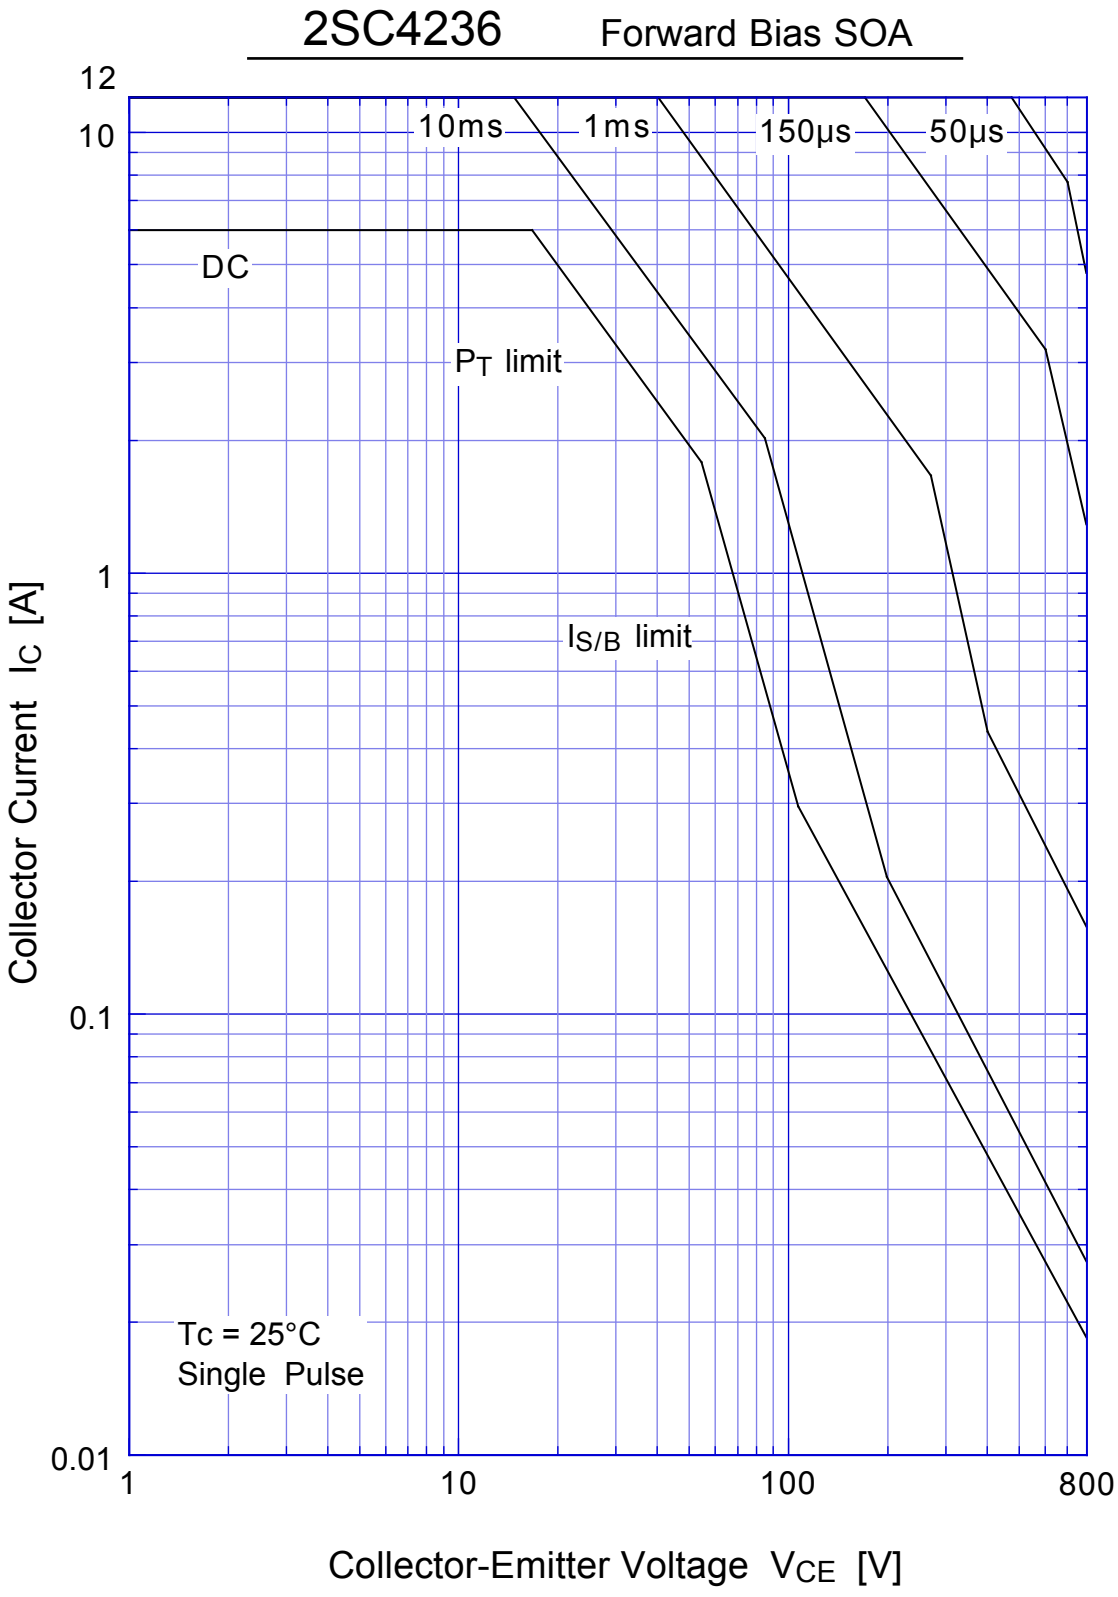
2SC4236
Forward Bias SOA
12
10
1
0.1
0.01
1
10
100
800
10ms
1ms
150µs
50µs
DC
PT limit
IS/B limit
Tc = 25°C
Single Pulse
Collector Current IC [A]
Collector-Emitter Voltage VCE [V]

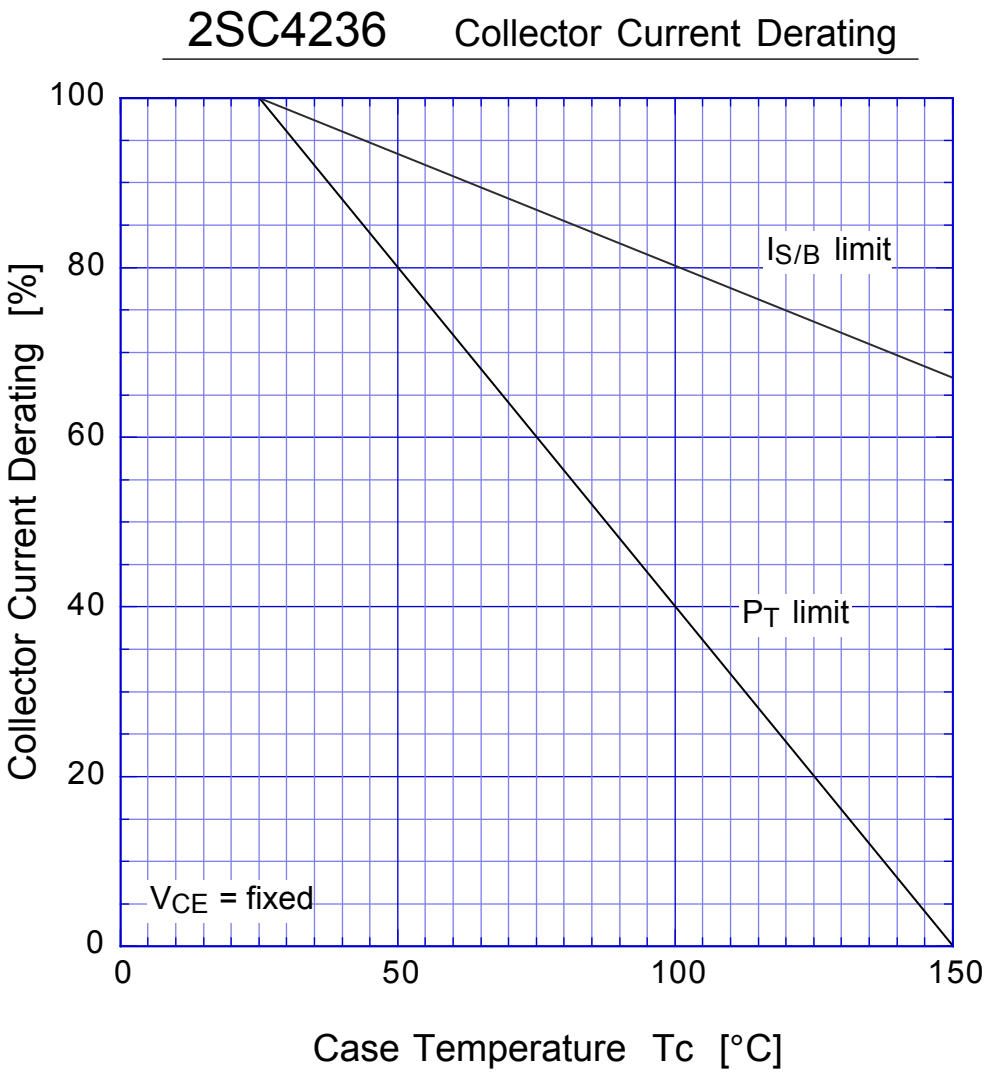
2SC4236 Collector Current Derating
100
80
60
40
20
0
Collector Current Derating [%]
0
50
100
150
Case Temperature Tc [°C]
IS/B limit
PT limit
VCE = fixed

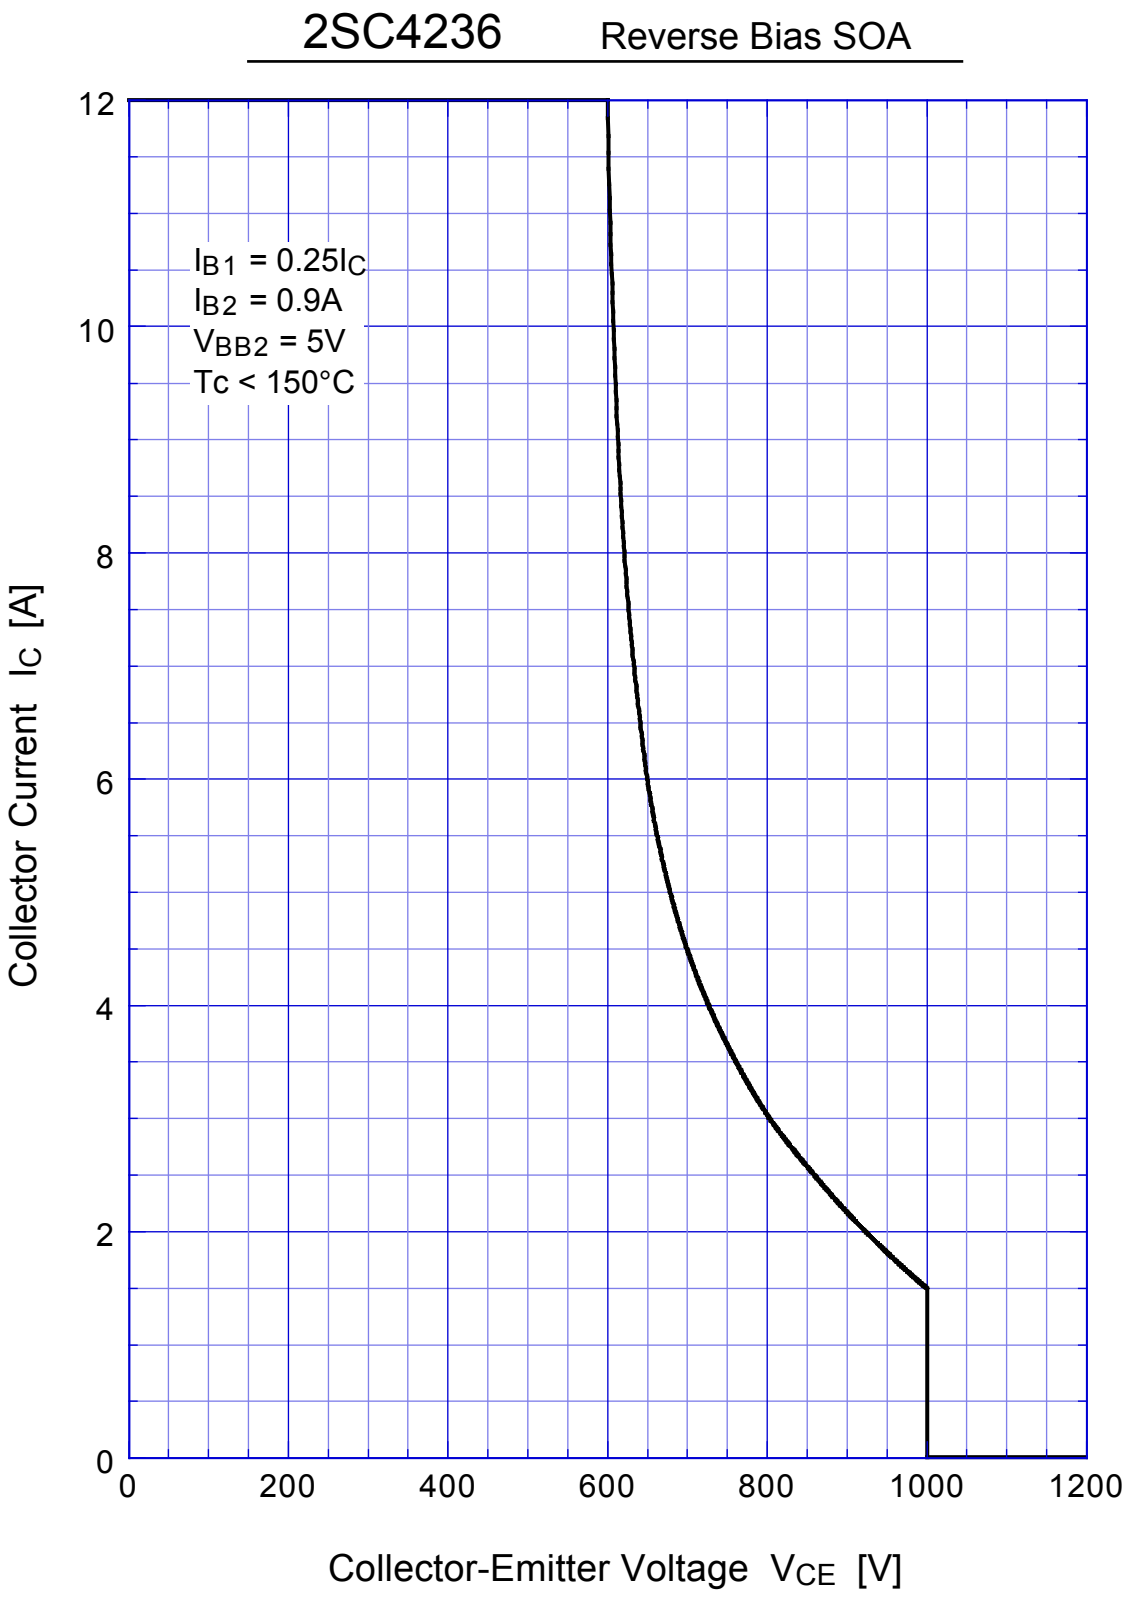
2SC4236
Reverse Bias SOA
I_{B1} = 0.25I_C
I_{B2} = 0.9A
V_{BB2} = 5V
Tc < 150°C
Collector Current I_C [A]
Collector-Emitter Voltage V_{CE} [V]
0
2
4
6
8
10
12
0
200
400
600
800
1000
1200