Low Noise, High Speed Precision Operational Amplifiers

FEATURES

- *Guaranteed* 4.5nV/√Hz 10Hz Noise
- *Guaranteed* 3.8nV/√Hz 1kHz Noise
- 0.1Hz to 10Hz Noise, 60nV$_{P-P}$ Typical
- *Guaranteed* 7 Million Min Voltage Gain, R_L = 2k
- *Guaranteed* 3 Million Min Voltage Gain, R_L = 600Ω
- *Guaranteed* 25μV Max Offset Voltage
- *Guaranteed* 0.6μV/°C Max Drift with Temperature
- *Guaranteed* 11V/μs Min Slew Rate (LT1037)
- *Guaranteed* 117dB Min CMRR

APPLICATIONS

- Low Noise Signal Processing
- Microvolt Accuracy Threshold Detection
- Strain Gauge Amplifiers
- Direct Coupled Audio Gain Stages
- Sine Wave Generators
- Tape Head Preamplifiers
- Microphone Preamplifiers

LT, LTC and LT are registered trademarks of Linear Technology Corporation.

DESCRIPTION

The LT®1007/LT1037 series features the lowest noise performance available to date for monolithic operational amplifiers: 2.5nV/√Hz wideband noise (less than the noise of a 400Ω resistor), 1/f corner frequency of 2Hz and 60nV peak-to-peak 0.1Hz to 10Hz noise. Low noise is combined with outstanding precision and speed specifications: 10μV offset voltage, 0.2μV/°C drift, 130dB common mode and power supply rejection, and 60MHz gain bandwidth product on the decompensated LT1037, which is stable for closed-loop gains of 5 or greater.


The voltage gain of the LT1007/LT1037 is an extremely high 20 million driving a 2kΩ load and 12 million driving a 600Ω load to ±10V.

In the design, processing and testing of the device, particular attention has been paid to the optimization of the entire distribution of several key parameters. Consequently, the specifications of even the lowest cost grades (the LT1007C and the LT1037C) have been spectacularly improved compared to equivalent grades of competing amplifiers.


The sine wave generator application shown below utilizes the low noise and low distortion characteristics of the LT1037.

TYPICAL APPLICATION

Ultrapure 1kHz Sine Wave Generator

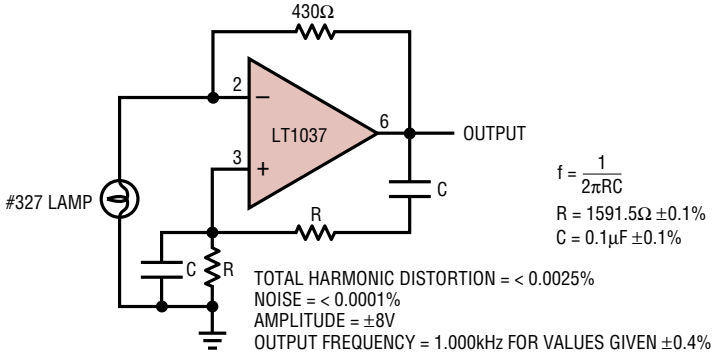

0.1Hz to 10Hz Noise

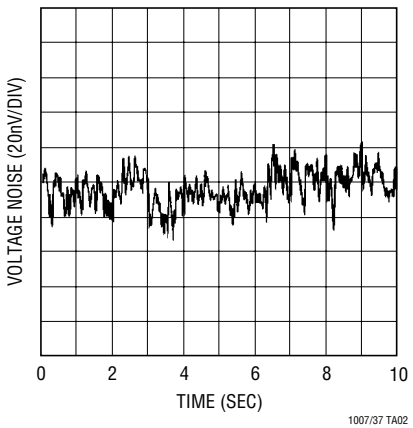


ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage ..... ±22V
Input Voltage ..... Equal to Supply Voltage
Output Short-Circuit Duration ..... Indefinite
Differential Input Current (Note 9) ..... ±25mA
Storage Temperature Range ..... –65°C to 150°C
Lead Temperature (Soldering, 10 sec.) ..... 300°C
Operating Temperature Range
LT1007/LT1037AC, C ..... 0°C to 70°C
LT1007/LT1037I ..... –40°C to 85°C
LT1007/LT1037AM, M **(OBSOLETE)** –55°C to 125°C


PACKAGE/ORDER INFORMATION

TOP VIEW




N8 PACKAGE
8-LEAD PDIP
T_{JMAX} = 100°C, θ_{JA} = 130°C/W (N8)

TOP VIEW



V– (CASE)
H PACKAGE
8-LEAD TO-5 METAL CAN
T_{JMAX} = 150°C, θ_{JA} = 150°C/W, θ_{JC} = 45°C/W

TOP VIEW



S8 PACKAGE
8-LEAD PLASTIC SO
T_{JMAX} = 150°C, θ_{JA} = 190°C/W

ORDER PART NUMBER	ORDER PART NUMBER	ORDER PART NUMBER
LT1007ACN8 LT1037ACN8 LT1007CN8 LT1037CN8 LT1007IN8 LT1037IN8		LT1007CS8 LT1037CS8 LT1007IS8 LT1037IS8
J8 PACKAGE LEAD CERDIP T_{JMAX} = 150°C, θ_{JA} = 100°C/W (J8)		S8 PART MARKING
LT1007ACJ8 LT1037ACJ8 LT1007AMJ8 LT1037AMJ8 LT1007CJ8 LT1037CJ8 LT1007MJ8 LT1037MJ8	LT1007ACH LT1037ACH LT1007AMH LT1037AMH LT1007CH LT1037CH LT1007MH LT1037MH	1007 1037 1007I 1037I
OBSOLETE PACKAGE Consider the N8 Package for Alternate Source	**OBSOLETE PACKAGE** Consider the N8 or S8 Package for Alternate Source	

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS

V_S = ±15V, T_A = 25°C, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	LT1007AC/AM LT1037AC/AM MIN	TYP	MAX	LT1007C/I/M LT1037C/I/M MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	(Note 2)		10	25		20	60	µV
$\frac{\Delta V_{OS}}{\Delta Time}$	Long Term Input Offset Voltage Stability	(Notes 3, 4)		0.2	1.0		0.2	1.0	µV/Mo
I_{OS}	Input Offset Current			7	30		12	50	nA
I_B	Input Bias Current			±10	±35		±15	±55	nA
e_n	Input Noise Voltage	0.1Hz to 10Hz (Notes 4, 6)		0.06	0.13		0.06	0.13	μV_{P-P}
	Input Noise Voltage Density	f_O = 10Hz (Notes 4, 5) f_O = 1000Hz (Note 4)		2.8 2.5	4.5 3.8		2.8 2.5	4.5 3.8	$nV/\sqrt{Hz}$ $nV/\sqrt{Hz}$
i_n	Input Noise Current Density	f_O = 10Hz (Notes 4, 7) f_O = 1000Hz (Notes 4, 7)		1.5 0.4	4.0 0.6		1.5 0.4	4.0 0.6	$pA/\sqrt{Hz}$ $pA/\sqrt{Hz}$

ELECTRICAL CHARACTERISTICS

V_S = ±15V, T_A = 25°C, unless otherwise noted.

SYMBOL	PARAMETER		CONDITIONS	LT1007AC/AM LT1037AC/AM MIN	TYP	MAX	LT1007C/I/M LT1037C/I/M MIN	TYP	MAX	UNITS
	Input Resistance, Common Mode				7			5		GΩ
	Input Voltage Range			±11.0	±12.5		±11.0	±12.5		V
CMRR	Common Mode Rejection Ratio		V_{CM} = ±11V	117	130		110	126		dB
PSRR	Power Supply Rejection Ratio		V_S = ±4V to ±18V	110	130		106	126		dB
A_{VOL}	Large-Signal Voltage Gain		$R_L \geq 2k$, V_O = ±12V $R_L \geq 1k$, V_O = ±10V $R_L \geq 600\Omega$, V_O = ±10V	7.0 5.0 3.0	20.0 16.0 12.0		5.0 3.5 2.0	20.0 16.0 12.0		V/µV V/µV V/µV
V_{OUT}	Maximum Output Voltage Swing		$R_L \geq 2k$ $R_L \geq 600\Omega$	±13.0 ±11.0	±13.8 ±12.5		±12.5 ±10.5	±13.5 ±12.5		V V
SR	Slew Rate	LT1007 LT1037	$R_L \geq 2k$ $A_{VCL} \geq 5$	1.7 11	2.5 15		1.7 11	2.5 15		V/µs V/µs
GBW	Gain Bandwidth Product	LT1007 LT1037	f_O = 100kHz (Note 8) f_O = 10kHz (Note 8) ($A_{VCL} \geq 5$)	5.0 45	8.0 60		5.0 45	8.0 60		MHz MHz
Z_O	Open-Loop Output Resistance		V_O = 0V, I_O = 0		70			70		Ω
P_D	Power Dissipation	LT1007 LT1037			80 80	120 130		80 85	140 140	mW mW

The ● denotes the specifications which apply over the temperature range 0°C ≤ T_A ≤ 70°C, V_S = ±15V, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		LT1007AC LT1037AC MIN	TYP	MAX	LT1007C LT1037C MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	(Note 2)	●		20	50		35	110	µV
$\frac{\Delta V_{OS}}{\Delta Temp}$	Average Input Offset Drift	(Note 10)	●		0.2	0.6		0.3	1.0	µV/°C
I_{OS}	Input Offset Current		●		10	40		15	70	nA
I_B	Input Bias Current		●		±14	±45		±20	±75	nA
	Input Voltage Range		●	±10.5	±11.8		±10.5	±11.8		V
CMRR	Common Mode Rejection Ratio	V_{CM} = ±10.5V	●	114	126		106	120		dB
PSRR	Power Supply Rejection Ratio	V_S = ±4.5V to ±18V	●	106	126		102	120		dB
A_{VOL}	Large-Signal Voltage Gain	$R_L \geq 2k$, V_O = ±10V $R_L \geq 1k$, V_O = ±10V	● ●	4.0 2.5	18.0 14.0		2.5 2.0	18.0 14.0		V/µV V/µV
V_{OUT}	Maximum Output Voltage Swing	$R_L \geq 2k$	●	±12.5	±13.6		±12.0	±13.6		V
P_D	Power Dissipation		●		90	144		90	160	mW

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the temperature range –40°C ≤ T_A ≤ 85°C, V_S = ±15V, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		LT1007I/LT1037I MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	(Note 2)	●		40	125	µV
$\frac{\Delta V_{OS}}{\Delta Temp}$	Average Input Offset Drift	(Note 10)	●		0.3	1.0	µV/°C
I_{OS}	Input Offset Current		●		20	80	nA
I_B	Input Bias Current		●		±25	±90	nA
	Input Voltage Range		●	±10	±11.7		V
CMRR	Common Mode Rejection Ratio	V_{CM} = ±10.5V	●	105	120		dB
PSRR	Power Supply Rejection Ratio	V_S = ±4.5V to ±18V	●	101	120		dB
A_{VOL}	Large-Signal Voltage Gain	R_L ≥ 2k, V_O = ±10V R_L ≥ 1k, V_O = ±10V	● ●	2.0 1.5	15.0 12.0		V/µV V/µV
V_{OUT}	Maximum Output Voltage Swing	R_L ≥ 2k	●	±12.0	±13.6		V
P_D	Power Dissipation		●		95	165	mW

The ● denotes the specifications which apply over the temperature range –55°C ≤ T_A ≤ 125°C, V_S = ±15V, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		LT1007AM/LT1037AM MIN	TYP	MAX	LT1007M/LT1037M MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	(Note 2)	●		25	60		50	160	µV
$\frac{\Delta V_{OS}}{\Delta Temp}$	Average Input Offset Drift	(Note 10)	●		0.2	0.6		0.3	1.0	µV/°C
I_{OS}	Input Offset Current		●		15	50		20	85	nA
I_B	Input Bias Current		●		±20	±60		±35	±95	nA
	Input Voltage Range		●	±10.3	±11.5		±10.3	±11.5		V
CMRR	Common Mode Rejection Ratio	V_{CM} = ±10.3V	●	112	126		104	120		dB
PSRR	Power Supply Rejection Ratio	V_S = ±4.5V to ±18V	●	104	126		100	120		dB
A_{VOL}	Large-Signal Voltage Gain	R_L ≥ 2k, V_O = ±10V R_L ≥ 1k, V_O = ±10V	● ●	3.0 2.0	14.0 10.0		2.0 1.5	14.0 10.0		V/µV V/µV
V_{OUT}	Maximum Output Voltage Swing	R_L ≥ 2k	●	±12.5	±13.5		±12.0	±13.5		V
P_D	Power Dissipation		●		100	150		100	170	mW

For MIL-STD components, please refer to LTC 883C data sheet for test listing and parameters.

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: Input Offset Voltage measurements are performed by automatic test equipment approximately 0.5 seconds after application of power. AM and AC grades are guaranteed fully warmed up.

Note 3: Long Term Input Offset Voltage Stability refers to the average trend line of Offset Voltage vs Time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in V_{OS} during the first 30 days are typically 2.5µV. Refer to typical performance curve.

Note 4: This parameter is tested on a sample basis only.

Note 5: 10Hz noise voltage density is sample tested on every lot. Devices 100% tested at 10Hz are available on request.

Note 6: See the test circuit and frequency response curve for 0.1Hz to 10Hz tester in the Applications Information section.

Note 7: See the test circuit for current noise measurement in the Applications Information section.


Note 8: This parameter is guaranteed by design and is not tested.

Note 9: The inputs are protected by back-to-back diodes. Current limiting resistors are not used in order to achieve low noise. If differential input voltage exceeds ±0.7V, the input current should be limited to 25mA.

Note 10: The Average Input Offset Drift performance is within the specifications unnulled or when nulled with a pot having a range of 8kΩ to 20kΩ.


TYPICAL PERFORMANCE CHARACTERISTICS

10Hz Voltage Noise Distribution

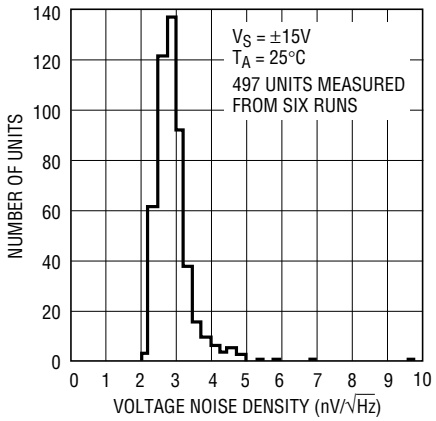


1007/37 G01

Voltage Noise vs Frequency

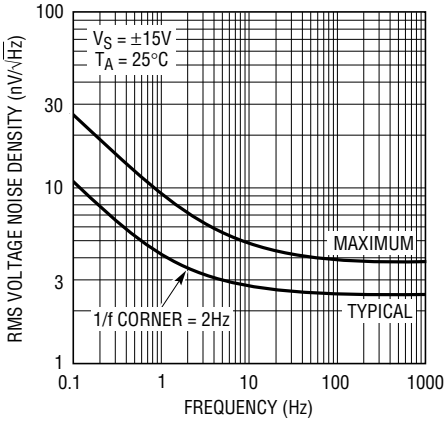

1007/37 G02


0.02Hz to 10Hz RMS Noise. Gain = 50,000 (Measured on HP3582 Spectrum Analyzer)

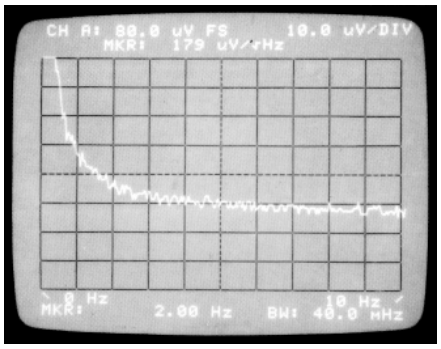

MARKER AT 2Hz (= 1/f CORNER) = $\frac{179\mu V/\sqrt{Hz}}{50{,}000} = 3.59\frac{nV}{\sqrt{Hz}}$


1007/37 G03

0.01Hz to 1Hz Peak-to-Peak Noise

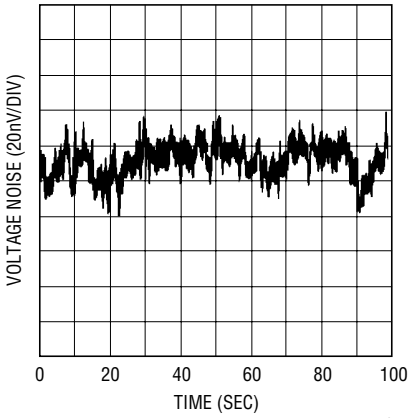


1007/37 G04

Total Noise vs Source Resistance

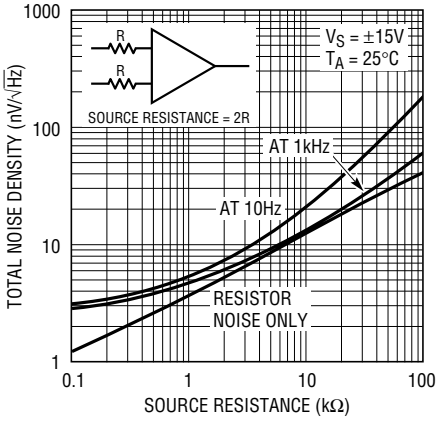


1007/37 G05

Voltage Noise vs Temperature

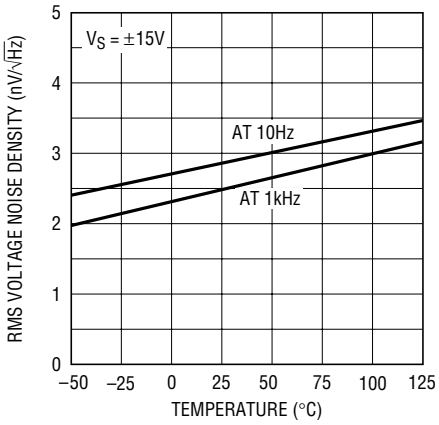


1007/37 G06

Current Noise vs Frequency

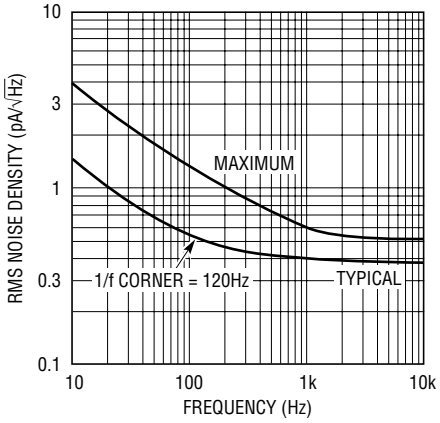


1007/37 G07

Wideband Voltage Noise (0.1Hz to Frequency Indicated)

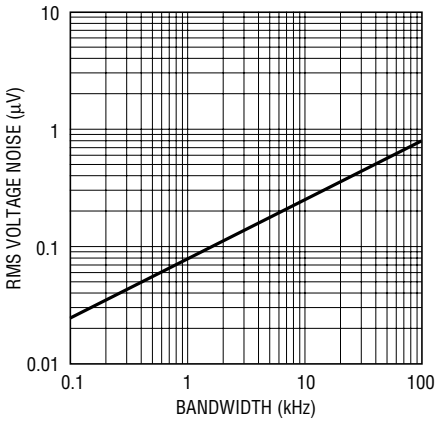

1007/37 G08


Voltage Noise vs Supply Voltage

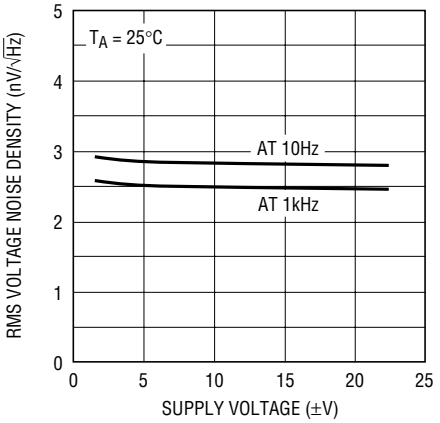

1007/37 G09


TYPICAL PERFORMANCE CHARACTERISTICS

Voltage Gain vs Frequency

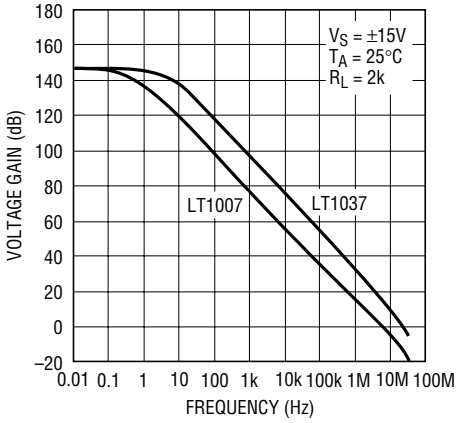


1007/37 G10

Voltage Gain vs Supply Voltage

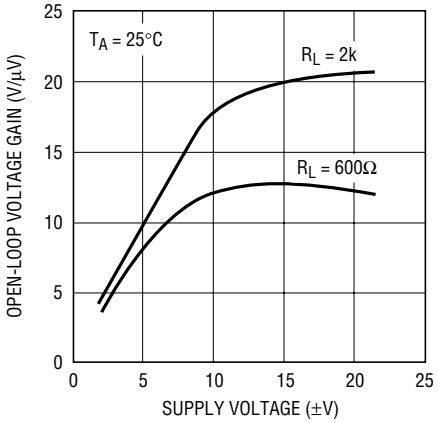


1007/37 G11

Voltage Gain, R_L = 2k and 600Ω

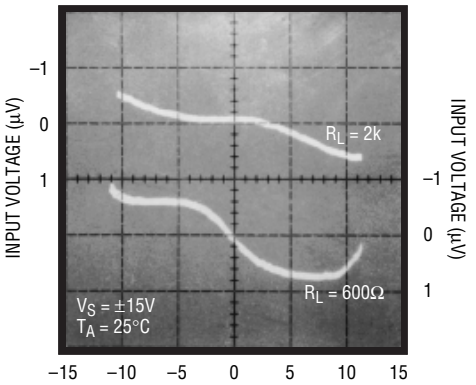


1007/37 G12

Voltage Gain vs Load Resistance

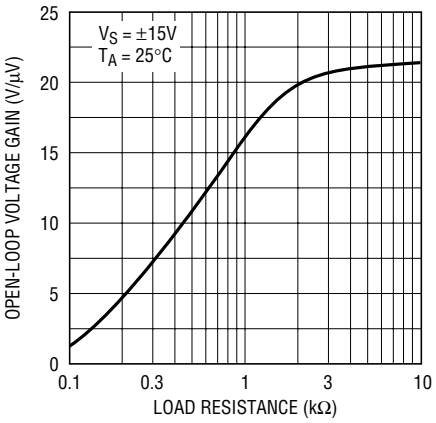


1007/37 G13

Voltage Gain vs Temperature

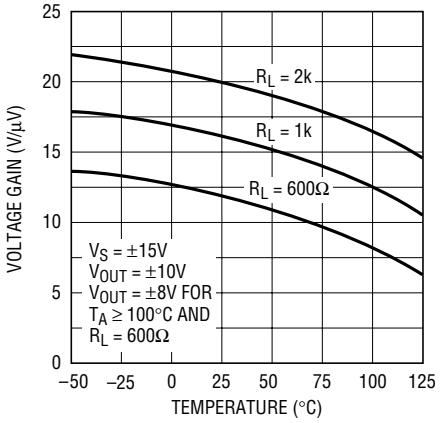


1007/37 G14

Warm-Up Drift

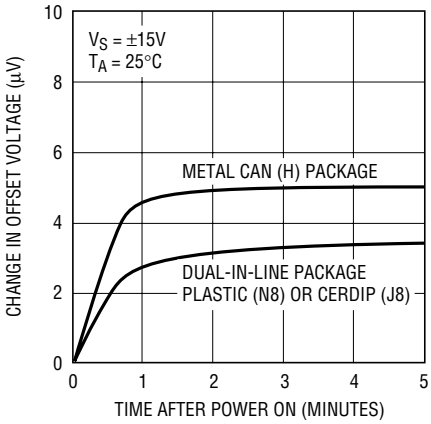


1007/37 G15

Long Term Stability of Four Representative Units

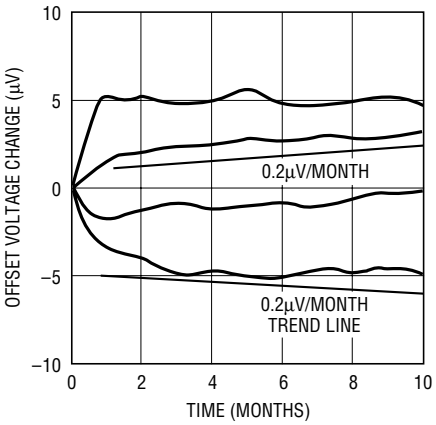


1007/37 G16

Offset Voltage Drift with Temperature of Representative Units

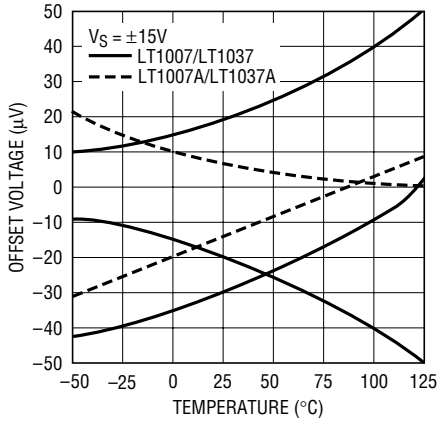

1007/37 G17


Supply Current vs Supply Voltage

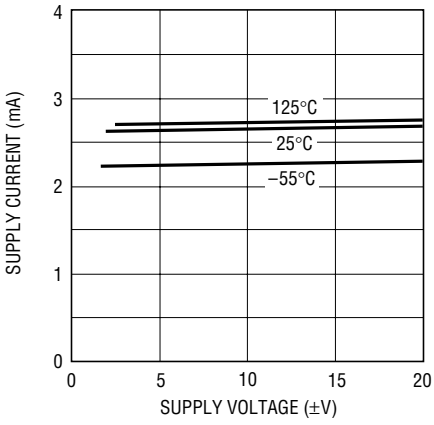

1007/37 G18


TYPICAL PERFORMANCE CHARACTERISTICS

Common Mode Rejection vs Frequency

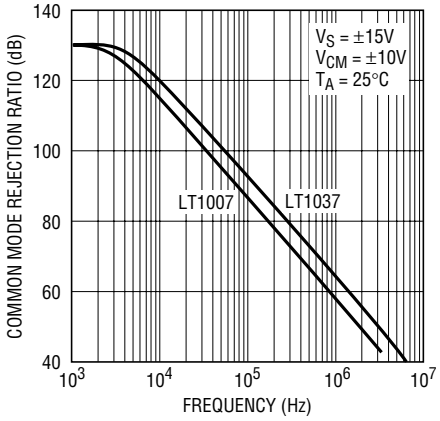


1007/37 G19

Common Mode Limit vs Temperature

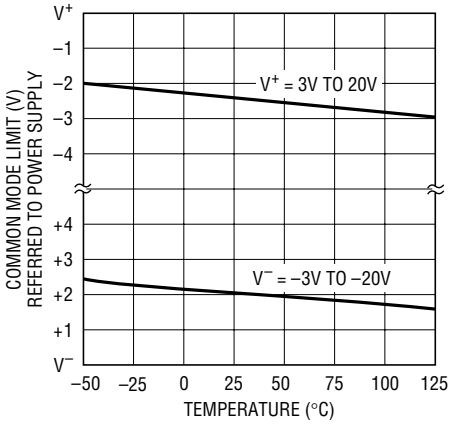


1007/37 G20

Input Bias Current Over the Common Mode Range

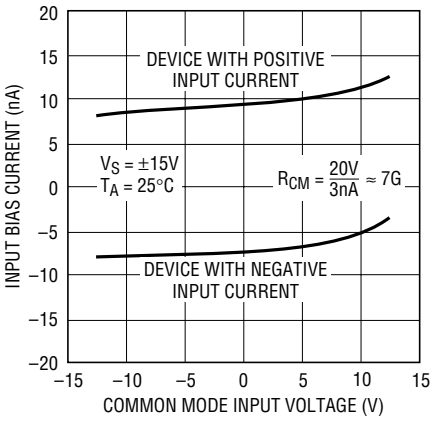


1007/37 G21

Input Bias Current vs Temperature

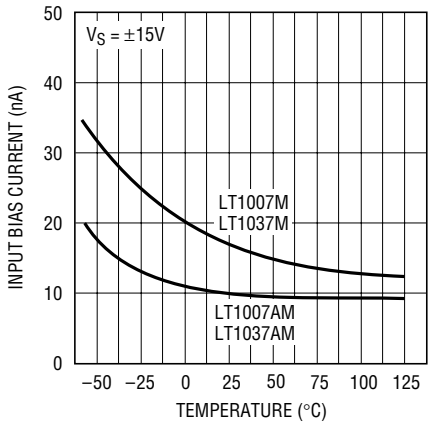


1007/37 G22

Input Offset Current vs Temperature

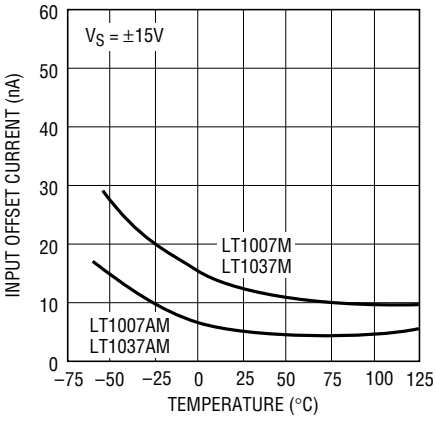


1007/37 G23

Output Swing vs Load Resistance

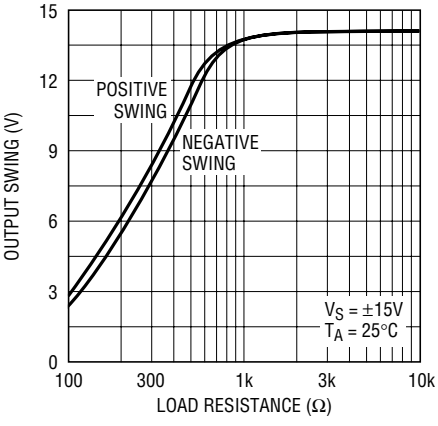


1007/37 G24

PSRR vs Frequency

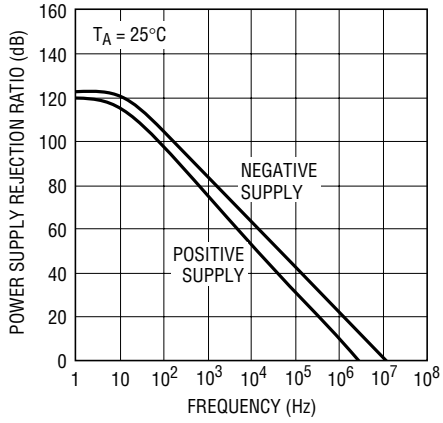


1195 G25

Closed-Loop Output Impedance

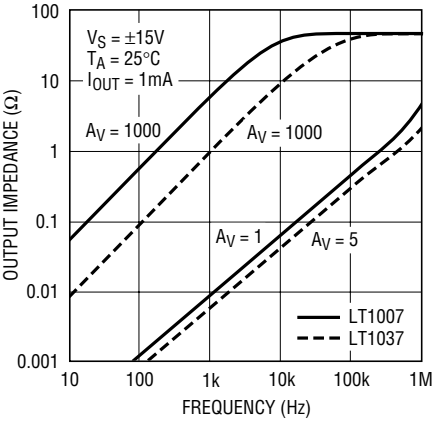

1007/37 G26


Output Short-Circuit Current vs Time

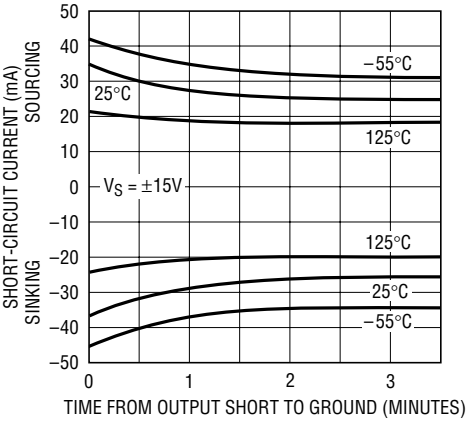

1007/37 G27

TYPICAL PERFORMANCE CHARACTERISTICS


LT1037 Small-Signal Transient Response

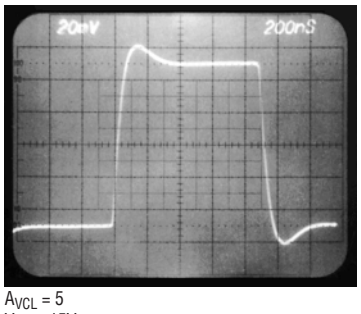

A_{VCL} = 5
V_S = ±15V
C_L = 15pF

1007/37 G28


LT1037 Large-Signal Response

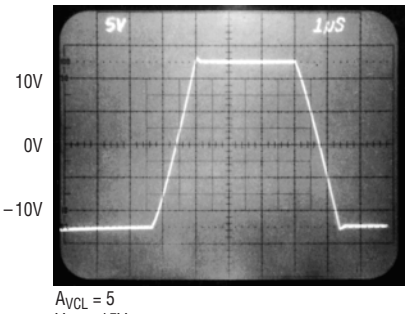

A_{VCL} = 5
V_S = ±15V


1007/37 G29

LT1037 Phase Margin, Gain Bandwidth Product, Slew Rate vs Temperature

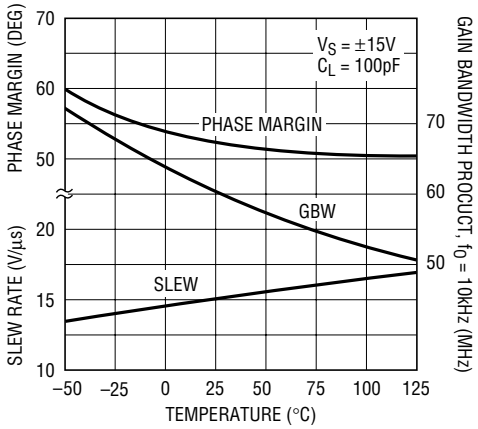


1007/37 G30

LT1037 Gain, Phase Shift vs Frequency

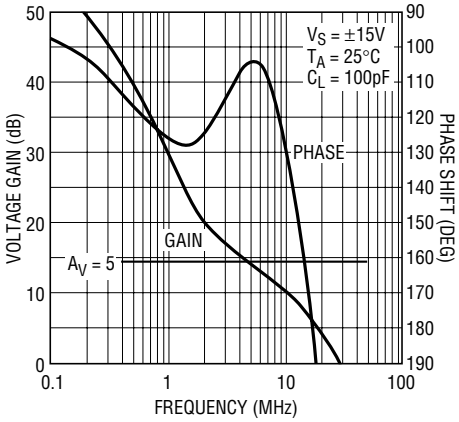


1007/37 G31

LT1007 Gain, Phase Shift vs Frequency

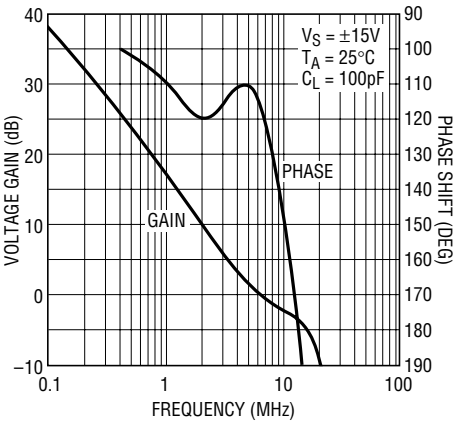


1007/37 G32

LT1007 Phase Margin, Gain Bandwidth Product, Slew Rate vs Temperature

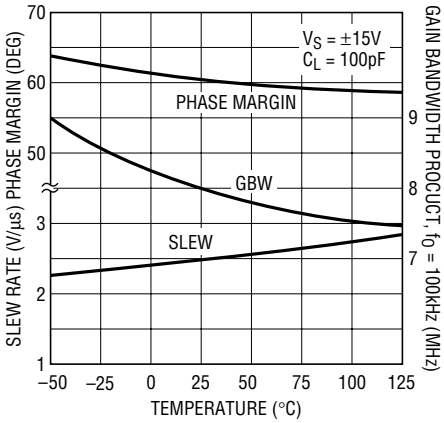

1007/37 G33


LT1007 Small-Signal Transient Response

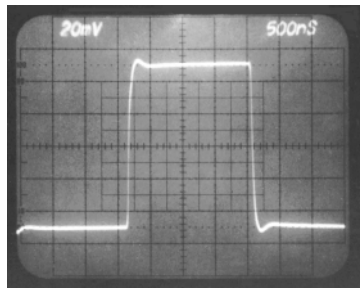

A_{VCL} = 1
V_S = ±15V
C_L = 15pF

1007/37 G34


LT1007 Large-Signal Response

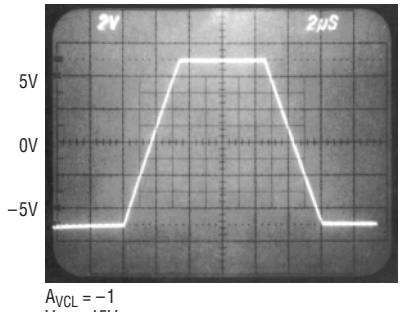

A_{VCL} = –1
V_S = ±15V

1007/37 G35

Maximum Undistorted Output vs Frequency

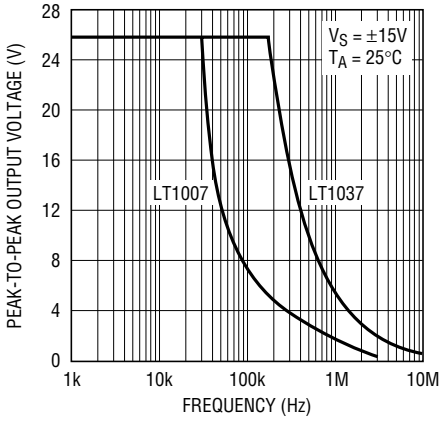

1007/37 G36

APPLICATIONS INFORMATION

General

The LT1007/LT1037 series devices may be inserted directly into OP-07, OP-27, OP-37 and 5534 sockets with or without removal of external compensation or nulling components. In addition, the LT1007/LT1037 may be fitted to 741 sockets with the removal or modification of external nulling components.

Offset Voltage Adjustment

The input offset voltage of the LT1007/LT1037 and its drift with temperature, are permanently trimmed at wafer testing to a low level. However, if further adjustment of V_{OS} is necessary, the use of a 10kΩ nulling potentiometer will not degrade drift with temperature. Trimming to a value other than zero creates a drift of $(V_{OS}/300)\mu V/°C$, e.g., if V_{OS} is adjusted to 300μV, the change in drift will be 1μV/°C (Figure 1).

The adjustment range with a 10kΩ pot is approximately ±2.5mV. If less adjustment range is needed, the sensitivity and resolution of the nulling can be improved by using a smaller pot in conjunction with fixed resistors. The example has an approximate null range of ±200μV (Figure 2).

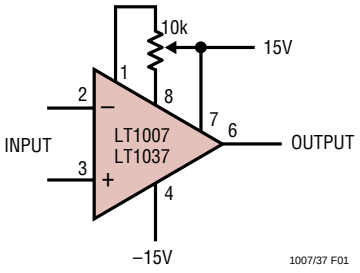


Figure 1. Standard Adjustment




Figure 2. Improved Sensitivity Adjustment

Offset Voltage and Drift

Thermocouple effects, caused by temperature gradients across dissimilar metals at the contacts to the input terminals, can exceed the inherent drift of the amplifier unless proper care is exercised. Air currents should be minimized, package leads should be short, the two input leads should be close together and maintained at the same temperature.

The circuit shown to measure offset voltage is also used as the burn-in configuration for the LT1007/LT1037, with the supply voltages increased to ±20V (Figure 3).

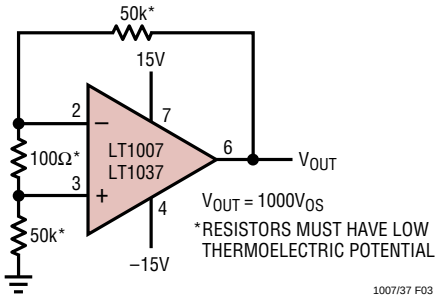


Figure 3. Test Circuit for Offset Voltage and Offset Voltage Drift with Temperature

Unity-Gain Buffer Application (LT1007 Only)

When $R_F \leq 100\Omega$ and the input is driven with a fast, large-signal pulse (>1V), the output waveform will look as shown in the pulsed operation diagram (Figure 4).

During the fast feedthrough-like portion of the output, the input protection diodes effectively short the output to the input and a current, limited only by the output short-circuit protection, will be drawn by the signal generator. With $R_F \geq 500\Omega$, the output is capable of handling the current requirements ($I_L \leq 20mA$ at 10V) and the amplifier stays in its active mode and a smooth transition will occur.

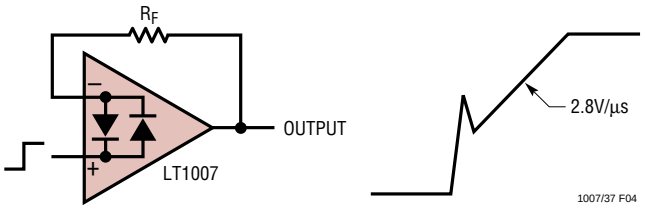


Figure 4. Pulsed Operation

APPLICATIONS INFORMATION

As with all operational amplifiers when $R_F > 2k$, a pole will be created with R_F and the amplifier's input capacitance, creating additional phase shift and reducing the phase margin. A small capacitor (20pF to 50pF) in parallel with R_F will eliminate this problem.

Noise Testing

The 0.1Hz to 10Hz peak-to-peak noise of the LT1007/LT1037 is measured in the test circuit shown (Figure 5a). The frequency response of this noise tester (Figure 5b) indicates that the 0.1Hz corner is defined by only one zero. The test time to measure 0.1Hz to 10Hz noise should not exceed ten seconds, as this time limit acts as an additional zero to eliminate noise contributions from the frequency band below 0.1Hz.

Measuring the typical 60nV peak-to-peak noise performance of the LT1007/LT1037 requires special test precautions:

1. The device should be warmed up for at least five minutes. As the op amp warms up, its offset voltage changes typically 3μV due to its chip temperature increasing 10°C to 20°C from the moment the power supplies are turned on. In the ten-second measurement interval these temperature-induced effects can easily exceed tens of nanovolts.
2. For similar reasons, the device must be well shielded from air currents to eliminate the possibility of thermoelectric effects in excess of a few nanovolts, which would invalidate the measurements.
3. Sudden motion in the vicinity of the device can also "feedthrough" to increase the observed noise.

A noise voltage density test is recommended when measuring noise on a large number of units. A 10Hz noise voltage density measurement will correlate well with a 0.1Hz to 10Hz peak-to-peak noise reading since both results are determined by the white noise and the location of the 1/f corner frequency.

Current noise is measured in the circuit shown in Figure 6 and calculated by the following formula:

$$i_n = \frac{\left[\left(e_{no}\right)^2 - \left(130nV \bullet 101\right)^2\right]^{1/2}}{\left(1M\Omega\right)\left(101\right)}$$

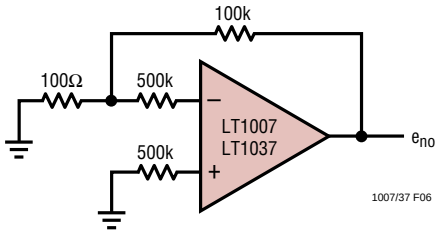


Figure 6

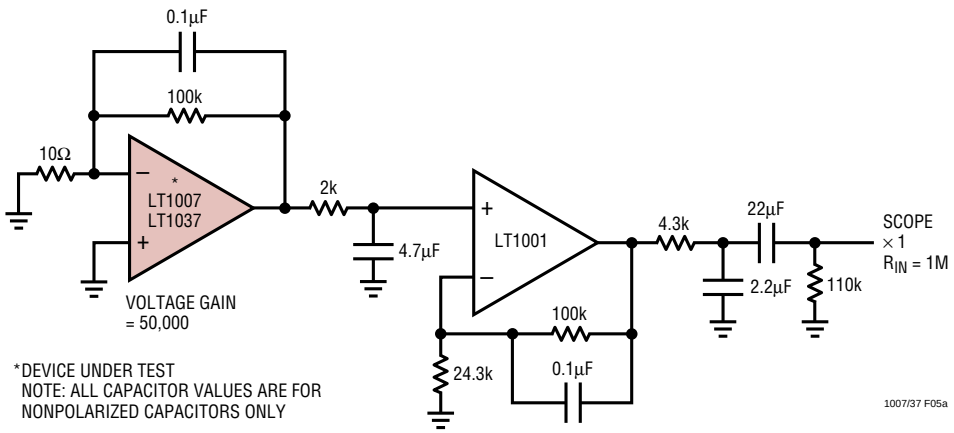


Figure 5a. 0.1Hz to 10Hz Noise Test Circuit

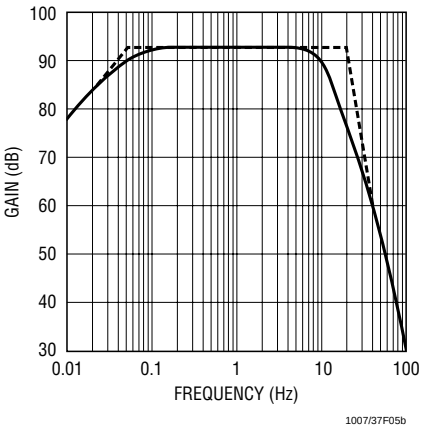


Figure 5b. 0.1Hz to 10Hz Peak-to-Peak Noise Tester Frequency Response

APPLICATIONS INFORMATION

The LT1007/LT1037 achieve their low noise, in part, by operating the input stage at 120μA versus the typical 10μA of most other op amps. Voltage noise is inversely proportional while current noise is directly proportional to the square root of the input stage current. Therefore, the LT1007/LT1037's current noise will be relatively high. At low frequencies, the low 1/f current noise corner frequency (≈120Hz) minimizes current noise to some extent.

In most practical applications, however, current noise will not limit system performance. This is illustrated in the Total Noise vs Source Resistance plot in the Typical Performance Characteristics section, where:

Total Noise = $[(\text{voltage noise})^2 + (\text{current noise} \bullet R_S)^2 + (\text{resistor noise})^2]^{1/2}$

Three regions can be identified as a function of source resistance:

(i) $R_S \leq 400\Omega$. Voltage noise dominates


(ii) $400\Omega \leq R_S \leq 50k$ at 1kHz
$400\Omega \leq R_S \leq 8k$ at 10Hz
} Resistor noise dominates

(iii) $R_S > 50k$ at 1kHz
$R_S > 8k$ at 10Hz
} Current noise dominates

Clearly the LT1007/LT1037 should not be used in region (iii), where total system noise is at least six times higher than the voltage noise of the op amp, i.e., the low voltage noise specification is completely wasted.


TYPICAL APPLICATIONS

Gain 1000 Amplifier with 0.01% Accuracy, DC to 5Hz

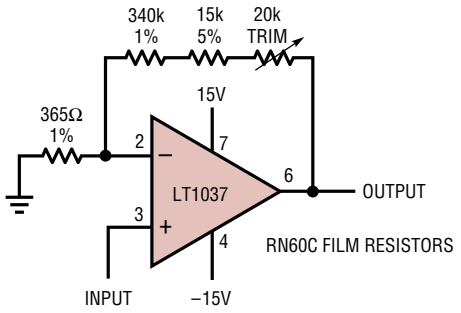

THE HIGH GAIN AND WIDE BANDWIDTH OF THE LT1037 (AND LT1007) IS USEFUL IN LOW FREQUENCY, HIGH CLOSED-LOOP GAIN AMPLIFIER APPLICATIONS. A TYPICAL PRECISION OP AMP MAY HAVE AN OPEN-LOOP GAIN OF ONE MILLION WITH 500kHz BANDWIDTH. AS THE GAIN ERROR PLOT SHOWS, THIS DEVICE IS CAPABLE OF 0.1% AMPLIFYING ACCURACY UP TO 0.3Hz ONLY. EVEN INSTRUMENTATION RANGE SIGNALS CAN VARY AT A FASTER RATE. THE LT1037'S "GAIN PRECISION-BANDWIDTH PRODUCT" IS 200 TIMES HIGHER AS SHOWN.


Gain Error vs Frequency
Closed-Loop Gain = 1000

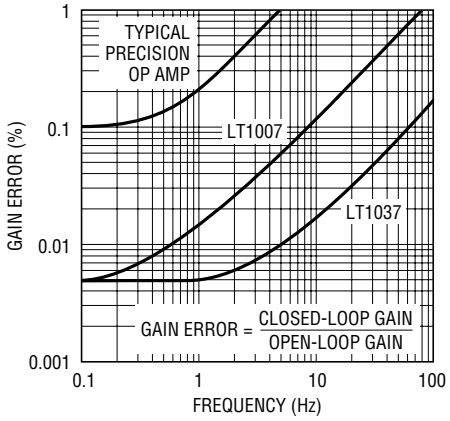

1007/37 TA03

TYPICAL APPLICATIONS

Microvolt Comparator with Hysteresis

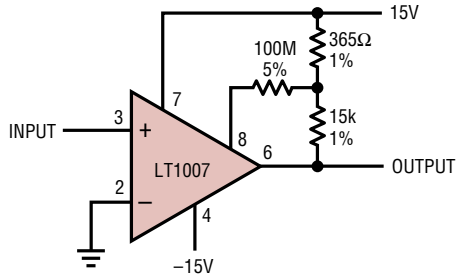


POSITIVE FEEDBACK TO ONE OF THE NULLING TERMINALS CREATES APPROXIMATELY 5µV OF HYSTERESIS. OUTPUT CAN SINK 16mA.

INPUT OFFSET VOLTAGE IS TYPICALLY CHANGED LESS THAN 5µV DUE TO THE FEEDBACK.

1007/37 TA04


Precision Amplifier Drives 300Ω Load to ±10V

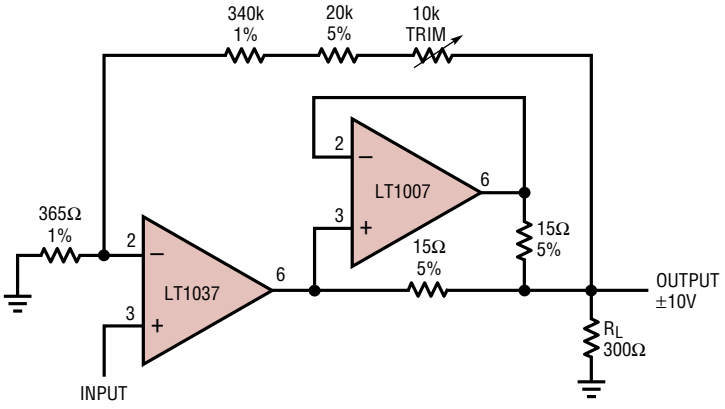

THE ADDITION OF THE LT1007 DOUBLES THE AMPLIFIER'S OUTPUT DRIVE TO ±33mA. GAIN ACCURACY IS 0.02%, SLIGHTLY DEGRADED COMPARED TO ABOVE BECAUSE OF SELF-HEATING OF THE LT1037 UNDER LOAD.

1007/37 TA05


Infrared Detector Preamplifier

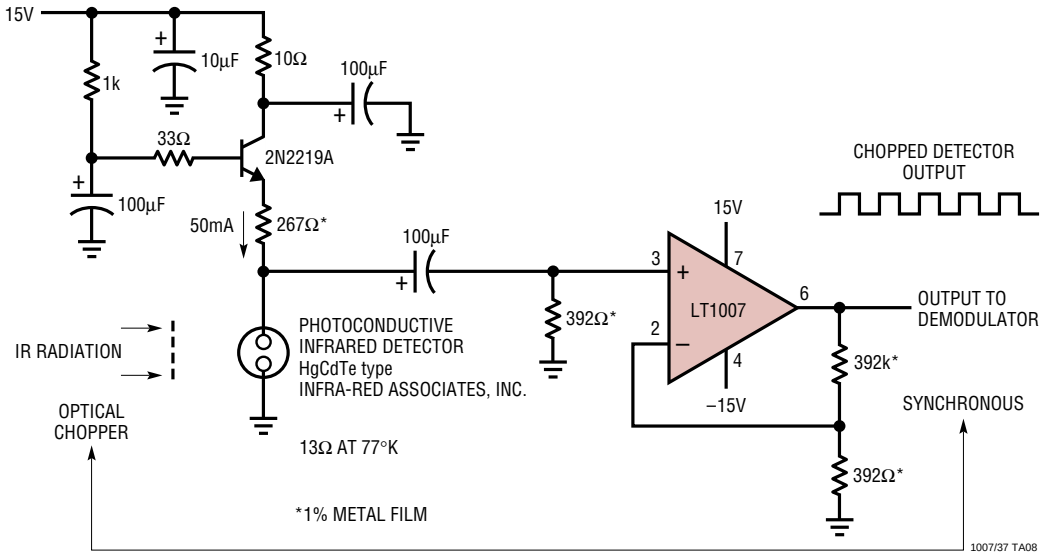


1007/37 TA08

TYPICAL APPLICATIONS


Phono Preamplifier

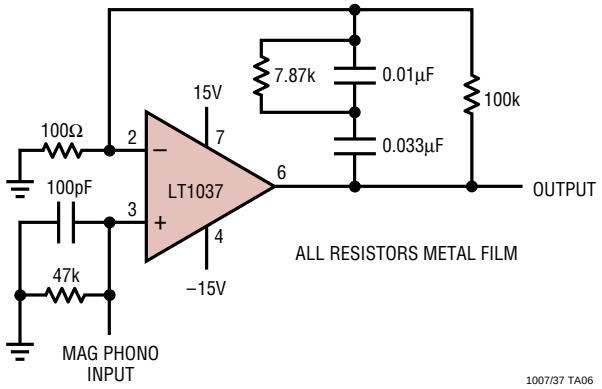

Tape Head Amplifier

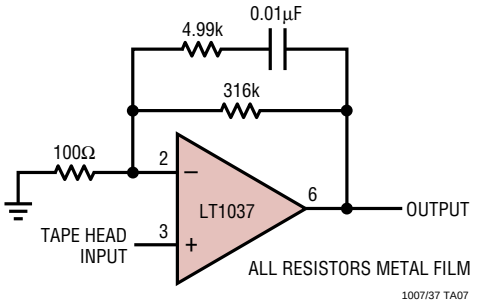


SIMPLIFIED SCHEMATIC

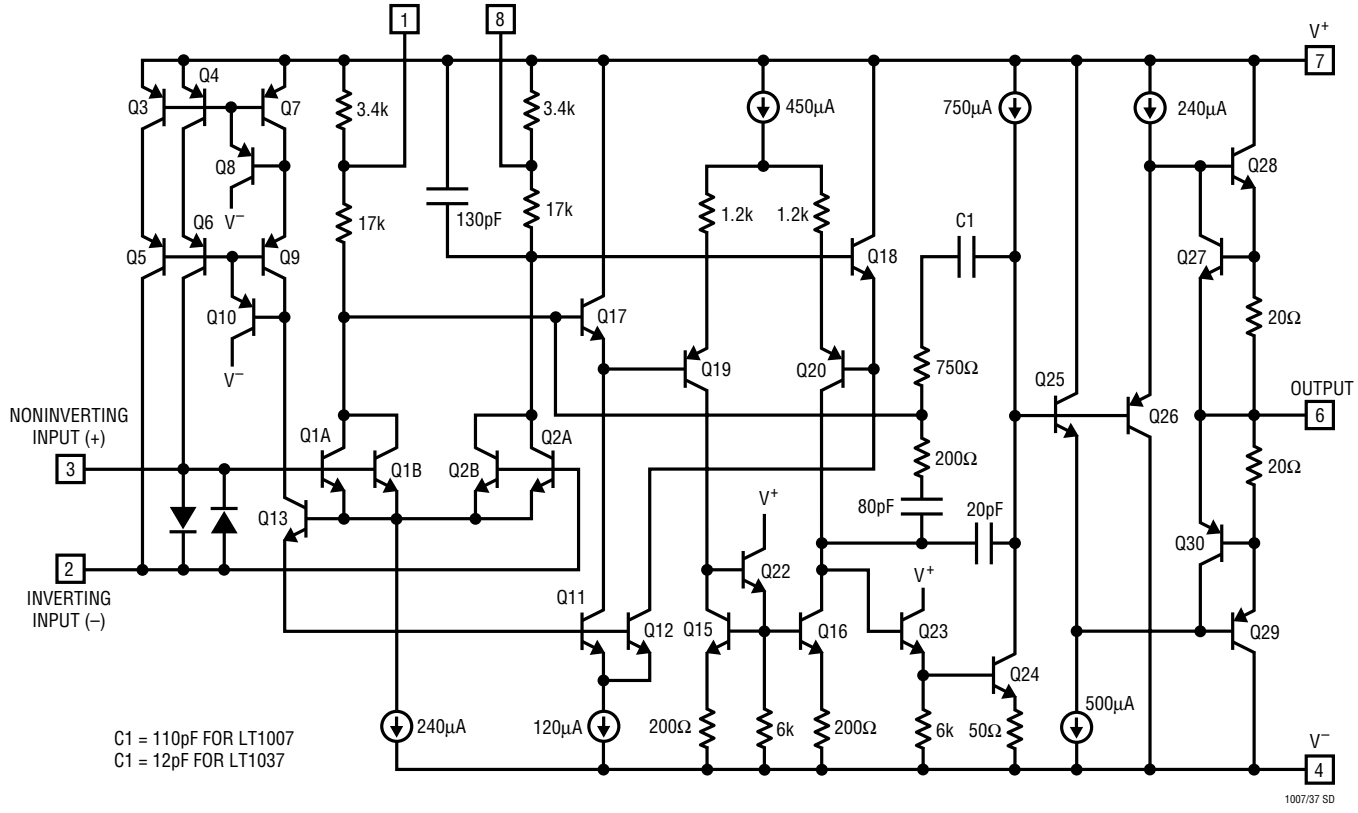

PACKAGE DESCRIPTION

H Package
8-Lead TO-5 Metal Can (.200 Inch PCD)
(Reference LTC DWG # 05-08-1320)

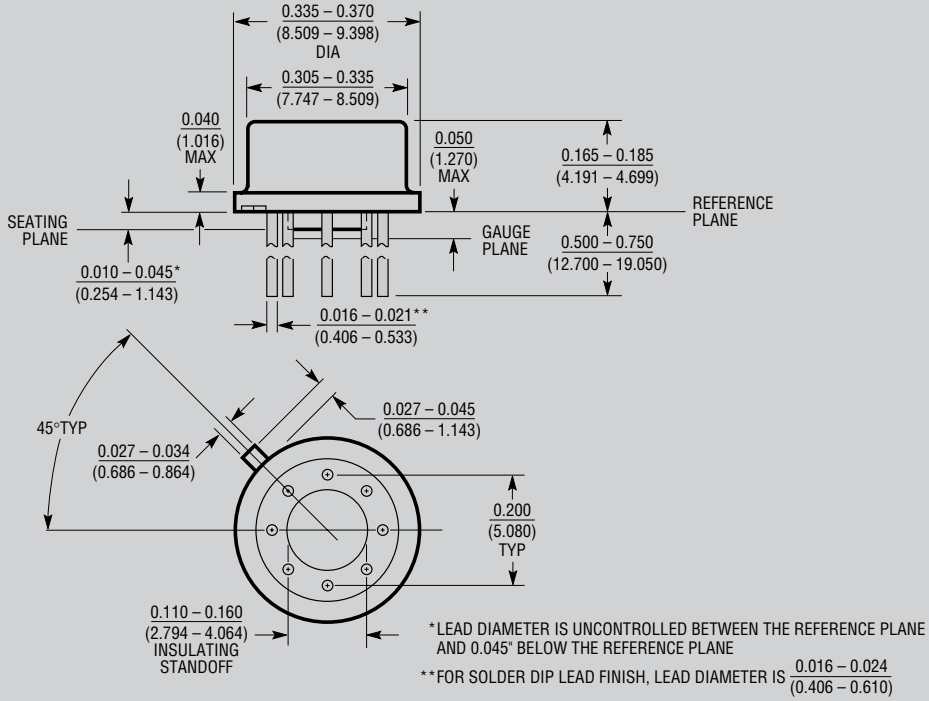


*LEAD DIAMETER IS UNCONTROLLED BETWEEN THE REFERENCE PLANE AND 0.045" BELOW THE REFERENCE PLANE

**FOR SOLDER DIP LEAD FINISH, LEAD DIAMETER IS 0.016 – 0.024 (0.406 – 0.610)

H8(TO-5) 0.200 PCD 0595

J8 Package
8-Lead CERDIP (Narrow .300 Inch, Hermetic)
(Reference LTC DWG # 05-08-1110)

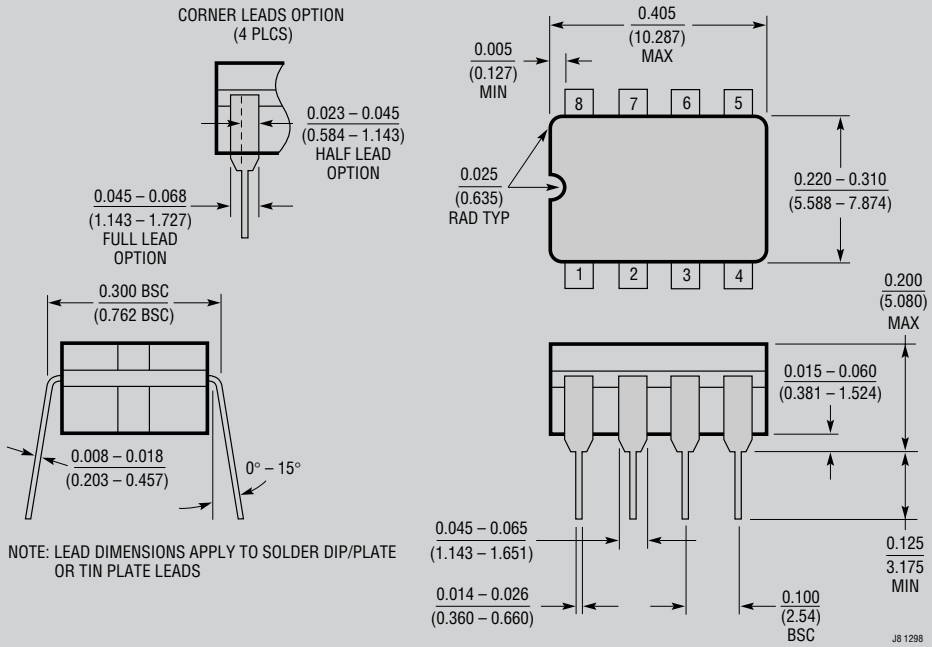


NOTE: LEAD DIMENSIONS APPLY TO SOLDER DIP/PLATE OR TIN PLATE LEADS

J8 1298

OBSOLETE PACKAGES


PACKAGE DESCRIPTION

N8 Package
8-Lead PDIP (Narrow .300 Inch)
(Reference LTC DWG # 05-08-1510)

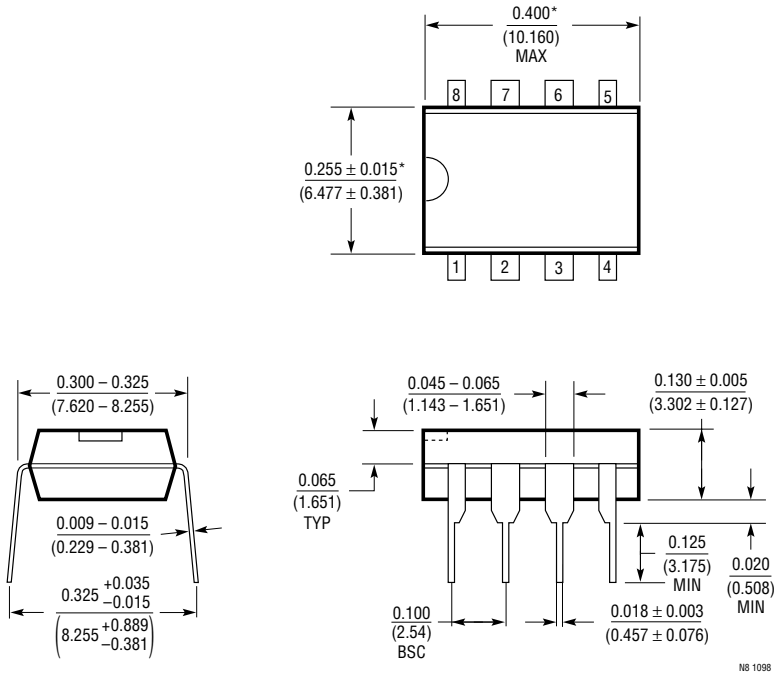

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 INCH (0.254mm)

S8 Package
8-Lead Plastic Small Outline (Narrow .150 Inch)
(Reference LTC DWG # 05-08-1610)

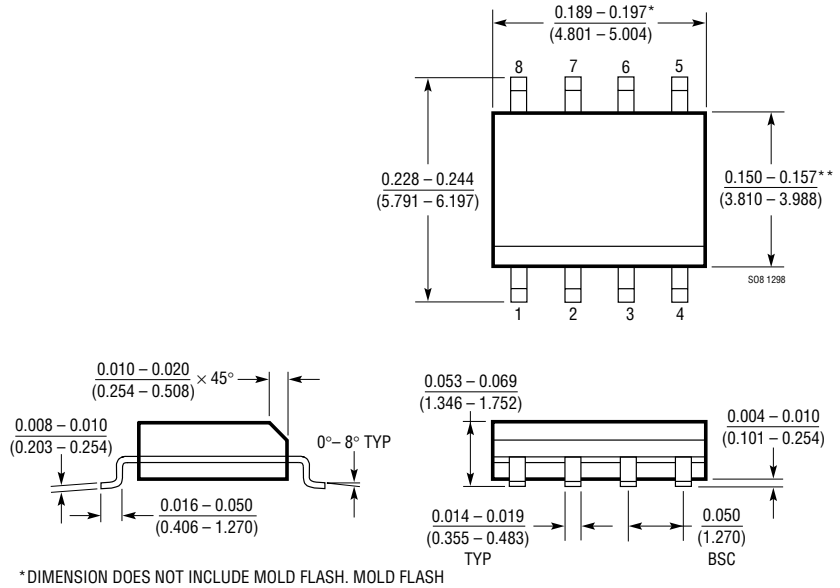


*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE

**DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

TYPICAL APPLICATION

Strain Gauge Signal Conditioner with Bridge Excitation

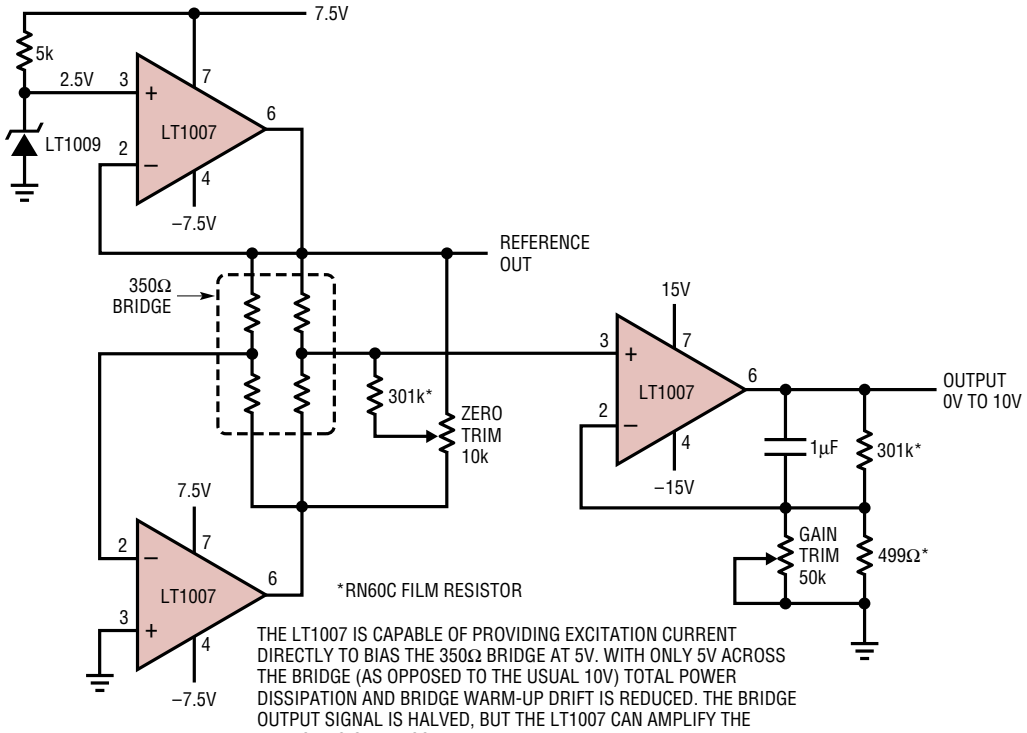

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1028	Ultralow Noise Precision Op Amp	Lowest Noise 0.85nV/√Hz
LT1115	Ultralow Noise, Low distortion Audio Op Amp	0.002% THD, Max Noise 1.2mV/√Hz
LT1124/LT1125	Dual/Quad Low Noise, High Speed Precision Op Amps	Similar to LT1007
LT1126/LT1127	Dual/Quad Decompensated Low Noise, High Speed Precision Op Amps	Similar to LT1037
LT1498/LT1499	10MHz, 5V/µs, Dual/Quad Rail-to-Rail Input and Output Precision C-Load™ Op Amps	

C-Load is a trademark of Linear Technology Corporation.

Linear Technology Corporation
1630 McCarthy Blvd., Milpitas, CA 95035-7417
(408) 432-1900 • FAX: (408) 434-0507 • www.linear.com

LT/CPI 1101 1.5K REV B • PRINTED IN USA

© LINEAR TECHNOLOGY CORPORATION 1985