

NPN General Purpose Transistor MMBTA05/MMBTA06

FEATURES

- Epitaxial planar die construction.
- Complementary PNP type available (MMBTA55/MMBTA56).
- Also available in lead free version.

Pb
Lead-free





SOT-23

APPLICATIONS

- Ideal for medium power amplification and switching

ORDERING INFORMATION

Type No.	Marking	Package Code
MMBTA05	1H	SOT-23
MMBTA06	1GM	SOT-23

MAXIMUM RATING @ Ta=25℃ unless otherwise specified

Symbol	Parameter		Value	UNIT
V_{CBO}	collector-base voltage	MMBTA05 MMBTA06	60 80	V
V_{CEO}	collector-emitter voltage	MMBTA05 MMBTA06	60 80	V
V_{EBO}	emitter-base voltage		4	V
I_C	collector current (DC)		0.5	A
P_C	Collector dissipation		0.35	W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient		357	°C/W
T_j , T_{stg}	junction and storage temperature		-55-150	°C


NPN General Purpose Transistor MMBTA05/MMBTA06

ELECTRICAL CHARACTERISTICS @ Ta=25℃ unless otherwise specified

Symbol	Parameter	Test conditions	MIN.	MAX.	UNIT
$V_{(BR)CBO}$	Collector-base breakdown voltage MMBTA05 MMBTA06	I_C=100μA,I_E=0	 60 80		V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage MMBTA05 MMBTA06	I_C=1.0mA,I_B=0	 60 80		V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	I_E=100μA,I_C=0	4		V
I_{CBO}	collector cut-off current MMBTA05 MMBTA06	I_E = 0; V_{CB} = 60V I_E = 0; V_{CB} = 80V	-	0.1	μA
I_{CEO}	collector cut-off current MMBTA05 MMBTA06	I_E = 0; V_{CE} = 60V I_E = 0; V_{CE} = 80V	-	0.1	μA
h_{FE}	DC current gain	V_{CE} = 1V; I_C= 10mA V_{CE} = 1V;I_C = 100mA	100	-	
$V_{CE(sat)}$	collector-emitter saturation voltage	I_C = 100mA; I_B = 10mA	-	0.25	V
f_T	transition frequency	I_C = 10mA; V_{CE} = 2.0V; f = 100MHz	100	-	MHz

PACKAGE OUTLINE


Plastic surface mounted package SOT-23

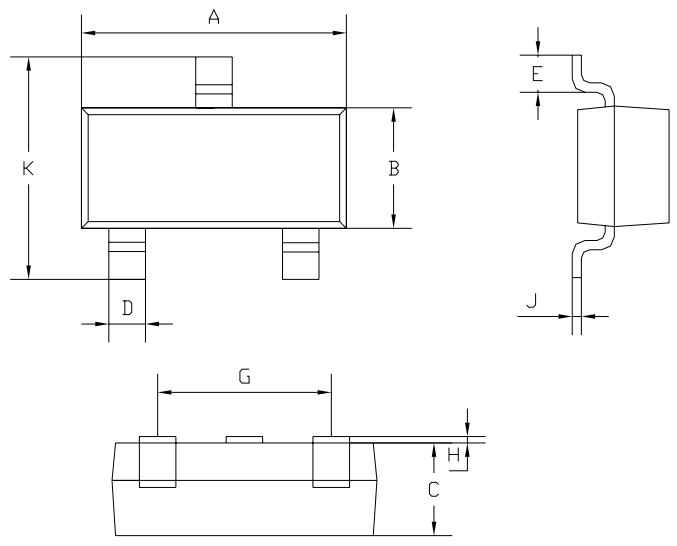

SOT-23		
Dim	Min	Max
A	2.85	2.95
B	1.25	1.35
C	1.0Typical	
D	0.37	0.43
E	0.35	0.48
G	1.85	1.95
H	0.02	0.1
J	0.1Typical	
K	2.35	2.45
All Dimensions in mm		

NPN General Purpose Transistor MMBTA05/MMBTA06

SOLDERING FOOTPRINT

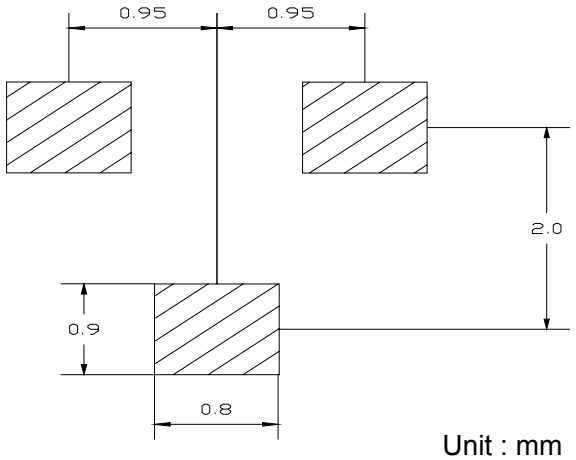

Unit : mm

PACKAGE INFORMATION

Device	Package	Shipping
MMBTA05/MMBTA06	SOT-23	3000/Tape&Reel