XC6219/XC6211 Series

300mA High Speed LDO Regulators with ON/OFF Switch

■GENERAL DESCRIPTION

The XC6219/XC6211 series are highly accurate, low noise, CMOS LDO Voltage Regulators. Offering low output noise, high ripple rejection ratio, low dropout and very fast turn-on times, the XC6219/XC6211 series is ideal for today's cutting edge mobile phone.

Internally the XC6219/XC6211 includes a reference voltage source, error amplifiers, driver transistors, current limiters and phase compensators. The XC6219/XC6211's current limiters' foldback circuit also operates as a short protect for the output current limiter and. the output pin. The output voltage is set by laser trimming. Voltages are selectable in 50mV steps within a range of 0.9V to 5.0V. The XC6219/XC6211 series is also fully compatible with low ESR ceramic capacitors, reducing cost and improving output stability. This high level of output stability is maintained even during frequent load fluctuations, due to the excellent transient response performance and high PSRR achieved across a broad range of frequencies.

The CE function allows the output of regulator to be turned off, resulting in greatly reduced power consumption.

■APPLICATIONS


- ●Mobile phones
- ●Cordless phones, radio communication equipment
- ●Portable games
- ●Cameras, Video cameras
- ●Reference voltage sources
- ●Battery powered equipment

■FEATURES

Maximum Output Current	: 150mA (V_{OUT}<1.75V, A~D type) 240mA (V_{OUT}≧1.8V, A~D type) 300mA (V_{OUT}≧1.3V, E~H type)
Dropout Voltage	: 200mV @ 100mA
Operating Voltage Range	: 2.0V ~ 6.0V
Output Voltage Range	: 0.9V ~ 5.0V (0.05V steps)
Highly Accuracy	: ±2% (V_{OUT}>1.5V) ±30mV (V_{OUT}≦1.5V) ±1% (V_{OUT}≧3.0V)
Low Power Consumption	: 25μA (TYP.)
Standby Current	: Less than 0.1μA (TYP.)
High Ripple Rejection	: 65dB @10kHz
Operating Ambient Temperature	: -40℃ ~ 85℃
Low ESR Capacitor	: Ceramic capacitor compatible
Ultra Small Packages	: SOT-25 SOT-89-5 (for XC6219 only) USP-6B (for XC6219 only)
Environmentally Friendly	: EU RoHS Compliant, Pb Free

■TYPICAL APPLICATION CIRCUIT

●XC6219 series

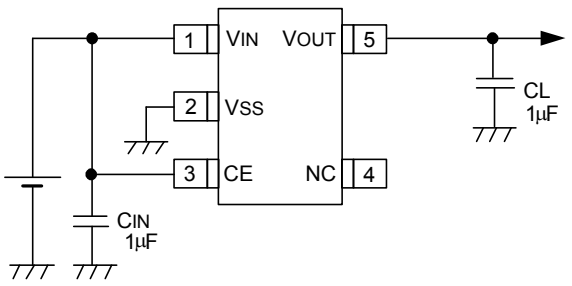


SOT-25

■TYPICAL PERFORMANCE CHARACTERISTICS


●Ripple Rejection Rate

XC6219/XC6211

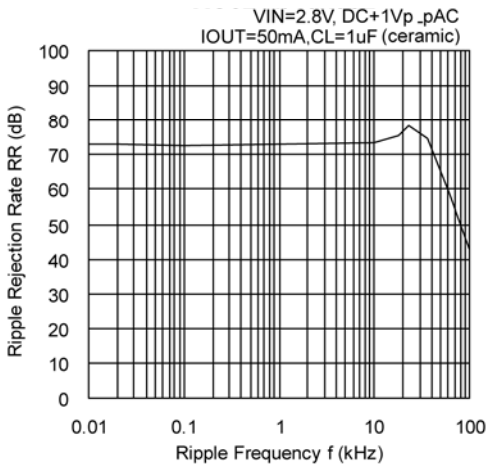


■PIN CONFIGURATION


[XC6219 Series]



SOT-25
(TOP VIEW)




SOT-89-5
(TOP VIEW)



USP-6B
(BOTTOM VIEW)

* The dissipation pad for the USP-6B package should be solder-plated in recommended mount pattern and metal masking so as to enhance mounting strength and hear release. If the pad needs to be connected to other pins, it should be connected to the VSS pin.

[XC6211 Series]



SOT-25
(TOP VIEW)

■PIN ASSIGNMENT

PIN NUMBER				PIN NAME	FUNCTIONS
XC6211	XC6219				
SOT-25	SOT-25	SOT-89-5	USP-6B		
5	1	4	1	VIN	Power Input
2	2	2	5	VSS	Ground
1	3	3	6	CE	ON / OFF Control
3	4	1	2, 4	NC	No Connection
4	5	5	3	VOUT	Output

■FUNCTION

TYPE A,E

PIN NAME	SIGNAL	STATUS
CE	L	Stand-by
	H	Active
	OPEN	Stand-by

TYPE B,F

PIN NAME	SIGNAL	STATUS
CE	L	Stand-by
	H	Active
	OPEN	Undefined state

TYPE C,G

PIN NAME	SIGNAL	STATUS
CE	L	Active
	H	Stand-by
	OPEN	Stand-by

TYPE D,H

PIN NAME	SIGNAL	STATUS
CE	L	Active
	H	Stand-by
	OPEN	Undefined state

*If XC6211/XC6219 B,D,F,H types are used with the CE pin opened, the IC goes into “Undefined state”. The CE pin voltage should be fixed in low or high for stable operation.

■PRODUCT CLASSIFICATION

●Ordering Information

XC6219 ①②③④⑤⑥−⑦(*1) (Standard pin layout versions)

XC6211 ①②③④⑤⑥−⑦(*1) (Different pin layout version in SOT-25)

DESIGNATOR	ITEM	SYMBOL	DESCRIPTION
①	CE Pin Logic	A	150mA, High Active, pull-down resistor built in(*4) (Semi-custom)
		B	150mA, High Active, no pull-down resistor built in (Standard)
		C	150mA, Low Active, pull-up resistor built in(*4) (Semi-custom)
		D	150mA, Low Active, no pull-up resistor built in (Semi-custom)
		E	300mA, High Active, pull-down resistor built in(*4) (Semi-custom)
		F	300mA, High Active, no pull-down resistor built in (Standard)
		G	300mA, Low Active, pull-up resistor built in(*4) (Semi-custom)
		H	300mA, Low Active, no pull-up resistor built in (Semi-custom)
②③	Output Voltage	09～50	e.g. ②=3, ③=0, → 3.0V
④	Output Voltage Accuracy	2(*3)	0.1V increments, ±2% accuracy e.g. ③=2, ③=8, ④=2 → 2.80V, ±2%
		1(*2)	0.1V increments, ±1% accuracy e.g. ②=3, ③=0, ④=1 → 3.00V, ±1%
		A(*3)	0.05V increments, ±2% accuracy e.g. ②=2, ③=8, ④=A → 2.85V, ±2%
		B(*2)	0.05V increments, ±1% accuracy e.g. ②=3, ③=0, ④=B → 3.05V, ±1%
⑤⑥-⑦	Packages (Order Unit)	MR	SOT-25(3,000/Reel)
		MR-G	SOT-25(3,000/Reel)
		PR	SOT-89-5 (for XC6219 only) (1,000/Reel)
		PR-G	SOT-89-5 (for XC6219 only) (1,000/Reel)
		DR	USP-6B (for XC6219 only) (3,000/Reel)
		DR-G	USP-6B (for XC6219 only) (3,000/Reel)

(*1) The "-G" suffix denotes Halogen and Antimony free as well as being fully RoHS compliant.


(*2) Output voltage of the ±1% accuracy product is 3.0V or more.

(*3) Output voltage accuracy of the $V_{OUT} \leqq 1.5V$ is ±30mV.


(*4) With the pull-up resistor or pull-down resistor built-in types, the supply current during operation will increase by V_{IN} / 2.0MΩ (TYP.)

■BLOCK DIAGRAM


XC6211,XC6219 series Type A,E

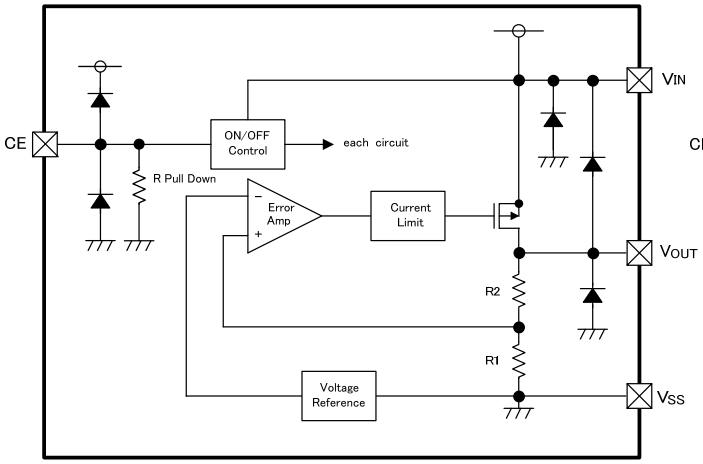

XC6211,XC6219 series Type B,D,F,H

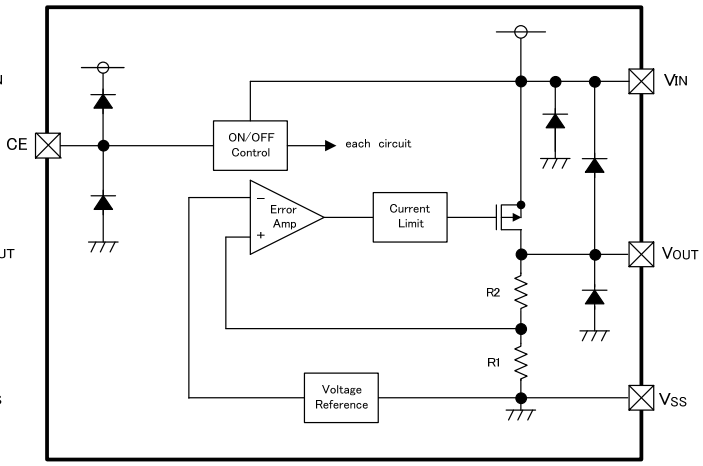

XC6211,XC6219 series Type C,G

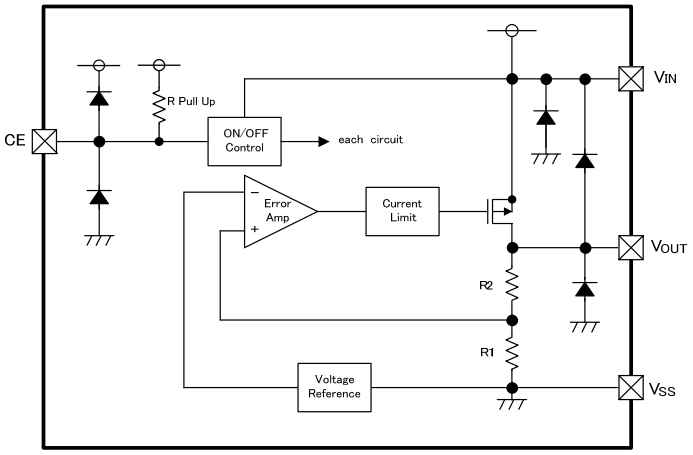

*Diode inside the circuit are an ESD protection diode and a parasitic diode.

■ABSOLUTE MAXIMUM RATINGS

Ta=25℃

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V_{IN}	7	V
Output Current		I_{OUT}	500(*1)	mA
Output Voltage		V_{OUT}	V_{SS} - 0.3 ~ V_{IN} + 0.3	V
CE Pin Voltage		V_{CE}	V_{SS} - 0.3 ~ V_{IN} + 0.3	V
Power Dissipation	SOT-25	Pd	250	mW
			600 (PCB mounted)(*2)	
	SOT-89		500	
			1300 (PCB mounted)(*2)	
	USP-6B		120	
			1000 (PCB mounted)(*2)	
Operating Ambient Temperature		Topr	- 40 ~ + 85	℃
Storage Temperature		Tstg	- 55 ~ + 125	℃

All voltages are described based on the V_{SS} pin.

(*1) $I_{OUT} \leqq Pd/(V_{IN}-V_{OUT})$

(*2) The power dissipation figure shown is PCB mounted and is for reference only. Please refer to page 24~26 for details.

■ELECTRICAL CHARACTERISTICS

●XC6219/XC6211 Type A,B

Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage (*5) (2%)	$V_{OUT(E)}$ (*3)	I_{OUT}=30mA	$V_{OUT(T)}$ (*2) ×0.98	$V_{OUT(T)}$ (*2)	$V_{OUT(T)}$ (*2) ×1.02	V	①
Output Voltage (*6) (1%)			$V_{OUT(T)}$ (*2) ×0.99	$V_{OUT(T)}$ (*2)	$V_{OUT(T)}$ (*2) ×1.01		
Maximum Output Current	I_{OUTMAX}	0.9V≦$V_{OUT(T)}$≦1.75V	150	-	-	mA	①
		1.8V≦$V_{OUT(T)}$≦5.0V	240	-	-		
Load Regulation	ΔV_{OUT}	1mA≦I_{OUT}≦100mA	-	15	50	mV	①
Dropout Voltage (*4)	Vdif1	I_{OUT}=30mA	-	E-1		mV	①
	Vdif2	I_{OUT}=100mA	-	E-2			
Supply Current (Type A)	I_{DD}	V_{CE}=V_{IN}=$V_{OUT(T)}$+1.0V V_{OUT}≦0.95V, V_{IN}=V_{CE}=2.0V	-	28	55	μA	②
Supply Current (Type B)			-	25	50		
Stand-by Current	I_{STB}	V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{SS} V_{OUT}≦0.95V, V_{IN}=2.0V	-	0.01	0.10	μA	②
Line Regulation	ΔV_{OUT}/ (ΔV_{IN}・V_{OUT})	$V_{OUT(T)}$+1.0V≦V_{IN}≦6.0V V_{OUT}≦0.95V, 2.0V≦V_{IN}≦6.0V I_{OUT}=30mA V_{OUT}≦1.75V, I_{OUT}=10mA	-	0.01	0.20	%/V	①
Input Voltage	V_{IN}	-	2	-	6	V	-
Output Voltage Temperature Characteristics	ΔV_{OUT}/ (ΔTopr・V_{OUT})	I_{OUT}=30mA -40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	V_{IN}=[$V_{OUT(T)}$+1.0]V+1.0Vp-p_{AC} V_{OUT}≦1.5, V_{IN}=2.5V+1.0Vp-p_{AC} I_{OUT}=50mA、f=10kHz	-	E-3	-	dB	④
Current Limiter	Ilim	V_{IN}=$V_{OUT(T)}$+2.0V、V_{CE}=V_{IN} 0.9V≦$V_{OUT(T)}$≦1.75V	-	300	-	mA	①
		V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{IN} 1.8V≦$V_{OUT(T)}$≦5.0V	240	300	-		
Short Circuit Current	I_{SHORT}	V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{IN} V_{OUT}≦1.75V, V_{IN}=$V_{OUT(T)}$+2.0V	-	50	-	mA	①
CE 'High' Level Voltage	V_{CEH}	-	1.6	-	V_{IN}	V	①
CE 'Low' Level Voltage	V_{CEL}	-	-	-	0.25	V	①
CE 'High' Level Current (Type A)	I_{CEH}	V_{IN}=V_{CE}=$V_{OUT(T)}$+1.0V V_{OUT}≦0.95V, V_{IN}=V_{CE}=2.0V	-0.10	-	5.0	μA	②
CE 'High' Level Current (Type B)			-0.10	-	0.10		
CE 'Low' Level Current	I_{CEL}	V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{SS} V_{OUT}≦0.95V, V_{IN}=2.0V	-0.10	-	0.10	μA	②

(*1) Unless otherwise stated, V_{IN}=$V_{OUT(T)}$+1.0V. If V_{OUT} is less than 0.95V, V_{IN}= 2.0V.

(*2) $V_{OUT(T)}$ = Specified output voltage

(*3) $V_{OUT(E)}$ = Effective output voltage

The output voltage when "$V_{OUT(T)}$+1.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value.

(*4) Vdif={V_{IN1}-V_{OUT1}}

V_{OUT1}=A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT} {$V_{OUT(T)}$+1.0V} is input.

V_{IN1}=The Input Voltage when V_{OUT1} appears as Input Voltage is gradually decreased.

(*5) If $V_{OUT(T)}$ is less than 1.45V, $V_{OUT(T)}$ -30mV (MIN.), $V_{OUT(T)}$ + 30mV (MAX.)

(*6) Only for the $V_{OUT(T)}$ is more than 3.0V products.

■ELECTRICAL CHARACTERISTICS

●XC6219/XC6211 Type C,D

Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage (*5) (2%)	$V_{OUT(E)}$ (*3)	I_{OUT}=30mA	$V_{OUT(T)}$ (*2) ×0.98	$V_{OUT(T)}$ (*2)	$V_{OUT(T)}$ (*2) ×1.02	V	①
Output Voltage (*6) (1%)			$V_{OUT(T)}$ (*2) ×0.99	$V_{OUT(T)}$ (*2)	$V_{OUT(T)}$ (*2) ×1.01		
Maximum Output Current	I_{OUTMAX}	0.9V≦$V_{OUT(T)}$≦1.75V	150	-	-	mA	①
		1.8V≦$V_{OUT(T)}$≦5.0V	240	-	-		
Load Regulation	ΔV_{OUT}	1mA≦I_{OUT}≦100mA	-	15	50	mV	①
Dropout Voltage (*4)	Vdif1	I_{OUT}=30mA	-	E-1		mV	①
	Vdif2	I_{OUT}=100mA	-	E-2			
Supply Current (Type C)	I_{DD}	V_{IN}=$V_{OUT(T)}$+1.0V V_{OUT}≦0.95V, V_{IN}=2.0V V_{CE}=V_{SS}	-	28	55	μA	②
Supply Current (Type D)			-	25	50		
Stand-by Current	I_{STB}	V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{IN} V_{OUT}≦0.95V, V_{IN}=V_{CE}=2.0V	-	0.01	0.10	μA	②
Line Regulation	ΔV_{OUT}/ (ΔV_{IN}・V_{OUT})	$V_{OUT(T)}$+1.0V≦V_{IN}≦6.0V V_{OUT}≦0.95V, 2.0V≦V_{IN}≦6.0V I_{OUT}=30mA V_{OUT}≦1.75V, I_{OUT}=10mA	-	0.01	0.20	%/V	①
Input Voltage	V_{IN}	-	2	-	6	V	-
Output Voltage Temperature Characteristics	ΔV_{OUT}/ (ΔTopr・V_{OUT})	I_{OUT}=30mA -40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	V_{IN}=[$V_{OUT(T)}$+1.0]V+1.0Vp-p_{AC} V_{OUT}≦1.5, V_{IN}=2.5V+1.0Vp-p_{AC} I_{OUT}=50mA、f=10kHz	-	E-3	-	dB	④
Current Limiter	Ilim	V_{IN}=$V_{OUT(T)}$+2.0V、V_{CE}=V_{SS} 0.9V≦$V_{OUT(T)}$≦1.75V	-	300	-	mA	①
		V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{SS} 1.8V≦$V_{OUT(T)}$≦5.0V	240	300	-		
Short Circuit Current	I_{SHORT}	V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{IN} V_{OUT}≦1.75V, V_{IN}=$V_{OUT(T)}$+2.0V	-	50	-	mA	①
CE 'High' Level Voltage	V_{CEH}	-	1.6	-	V_{IN}	V	①
CE 'Low' Level Voltage	V_{CEL}	-	-	-	0.25	V	①
CE 'High' Level Current	I_{CEH}	V_{CE}=V_{IN}=$V_{OUT(T)}$+1.0V V_{OUT}≦0.95V, V_{CE}=V_{IN}=2.0V	-0.10	-	0.10	μA	②
CE 'Low' Level Current (Type C)	I_{CEL}	V_{IN}=$V_{OUT(T)}$+1.0V,V_{CE}=V_{SS} V_{OUT}≦0.95V, V_{IN}=2.0V	-5.0	-	0.10	μA	②
CE 'Low' Level Current (Type D)			-0.10	-	0.10		

(*1) Unless otherwise stated, V_{IN}=$V_{OUT(T)}$+1.0V. If V_{OUT} is less than 0.95V, V_{IN}= 2.0V.

(*2) $V_{OUT(T)}$ = Specified output voltage

(*3) $V_{OUT(E)}$ = Effective output voltage

The output voltage when "$V_{OUT(T)}$+1.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value.

(*4) Vdif={V_{IN1}-V_{OUT1}}

V_{OUT1}=A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT} {$V_{OUT(T)}$+1.0V} is input.

V_{IN1}=The Input Voltage when V_{OUT1} appears as Input Voltage is gradually decreased.

(*5) If $V_{OUT(T)}$ is less than 1.45V, $V_{OUT(T)}$ -30mV (MIN.), $V_{OUT(T)}$ + 30mV (MAX.)

(*6) Only for the $V_{OUT(T)}$ is more than 3.0V products.

■ELECTRICAL CHARACTERISTICS

●XC6219/XC6211 Type E,F

Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage (*5) (2%)	$V_{OUT(E)}$ (*3)	I_{OUT}=30mA	$V_{OUT(T)}$ (*2) ×0.98	$V_{OUT(T)}$ (*2)	$V_{OUT(T)}$ (*2) ×1.02	V	①
Output Voltage (*6) (1%)			$V_{OUT(T)}$ (*2) ×0.99	$V_{OUT(T)}$ (*2)	$V_{OUT(T)}$ (*2) ×1.01		
Maximum Output Current	I_{OUTMAX}	V_{IN}=E-5 (*7)	E-4	-	-	mA	①
Load Regulation	ΔV_{OUT}	1mA≦I_{OUT}≦100mA	-	15	50	mV	①
Load Regulation2	ΔV_{OUT2}	1mA≦I_{OUT}≦300mA	-	-	100	mV	①
Dropout Voltage (*4)	Vdif1	I_{OUT}=30mA	-	E-1		mV	①
	Vdif2	I_{OUT}=100mA	-	E-2			
Supply Current (Type E)	I_{DD}	V_{CE}=V_{IN}=$V_{OUT(T)}$+1.0V V_{OUT}≦0.95V, V_{CE}=V_{IN}=2.0V	-	28	55	μA	②
Supply Current (Type F)			-	25	50		
Stand-by Current	I_{STB}	V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{SS} V_{OUT}≦0.95V, V_{CE}=V_{IN}=2.0V	-	0.01	0.10	μA	②
Line Regulation	ΔV_{OUT}/ (ΔV_{IN}・V_{OUT})	$V_{OUT(T)}$+1.0V≦V_{IN}≦6.0V V_{OUT}≦0.95V, 2.0V≦V_{IN}≦6.0V I_{OUT}=30mA V_{OUT}≦1.75V, I_{OUT}=10mA	-	0.01	0.20	%/V	①
Input Voltage	V_{IN}	-	2	-	6	V	-
Output Voltage Temperature Characteristics	ΔV_{OUT}/ (ΔTopr・V_{OUT})	I_{OUT}=30mA -40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	V_{IN}=[$V_{OUT(T)}$+1.0]V+1.0Vp-p_{AC} V_{OUT}≦1.5, V_{IN}=2.5V+1.0Vp-p_{AC} I_{OUT}=50mA、f=10kHz	-	70	-	dB	④
Current Limiter	Ilim	V_{IN}=$V_{OUT(T)}$+2.0V、V_{CE}=V_{IN} 0.9V≦$V_{OUT(T)}$≦1.75V	-	380	-	mA	①
		V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{IN} 1.8V≦$V_{OUT(T)}$≦5.0V					
Short Circuit Current	I_{SHORT}	V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{IN} V_{OUT}≦1.75V, V_{IN}=$V_{OUT(T)}$+2.0V	-	50	-	mA	①
CE 'High' Level Voltage	V_{CEH}	-	1.6	-	V_{IN}	V	①
CE 'Low' Level Voltage	V_{CEL}	-	-	-	0.25	V	①
CE 'High' Level Current (Type E)	I_{CEH}	V_{IN}=V_{CE}=$V_{OUT(T)}$+1.0V V_{OUT}≦0.95V, V_{IN}=V_{CE}=2.0V	-0.10	-	5.0	μA	②
CE 'High' Level Current (Type F)			-0.10	-	0.10		
CE 'Low' Level Current	I_{CEL}	V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{SS} V_{OUT}≦0.95V, V_{IN}=2.0V	-0.1	-	0.1	μA	②

(*1) Unless otherwise stated, V_{IN}=$V_{OUT(T)}$+1.0V. If V_{OUT} is less than 0.95V, V_{IN}= 2.0V.

(*2) $V_{OUT(T)}$ = Specified output voltage

(*3) $V_{OUT(E)}$ = Effective output voltage

The output voltage when "$V_{OUT(T)}$+1.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value.

(*4) Vdif={V_{IN1}-V_{OUT1}}

V_{OUT1}=A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT} {$V_{OUT(T)}$+1.0V} is input.

V_{IN1}=The Input Voltage when V_{OUT1} appears as Input Voltage is gradually decreased.

(*5) If $V_{OUT(T)}$ is less than 1.45V, $V_{OUT(T)}$ -30mV (MIN.), $V_{OUT(T)}$ + 30mV (MAX.)

(*6) Only for the $V_{OUT(T)}$ is more than 3.0V products.

(*7) Please refer to the "Voltage Chart" table.

■ELECTRICAL CHARACTERISTICS

●XC6219/XC6211 Type G,H

Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage (*5) (2%)	$V_{OUT(E)}$ (*3)	I_{OUT}=30mA	$V_{OUT(T)}$ (*2) ×0.98	$V_{OUT(T)}$ (*2)	$V_{OUT(T)}$ (*2) ×1.02	V	①
Output Voltage (*6) (1%)			$V_{OUT(T)}$ (*2) ×0.99	$V_{OUT(T)}$ (*2)	$V_{OUT(T)}$ (*2) ×1.01		
Maximum Output Current	I_{OUTMAX}	V_{IN}=E-5 (*7)	E-4	-	-	mA	①
Load Regulation	ΔV_{OUT}	1mA≦I_{OUT}≦100mA	-	15	50	mV	①
Load Regulation2	ΔV_{OUT2}	1mA≦I_{OUT}≦300mA	-	-	100	mV	①
Dropout Voltage (*4)	Vdif1	I_{OUT}=30mA	-	E-1		mV	①
	Vdif2	I_{OUT}=100mA	-	E-2			
Supply Current (Type G)	I_{DD}	V_{CE}=V_{IN}=$V_{OUT(T)}$+1.0V V_{OUT}≦0.95V, V_{IN}=2.0V V_{CE}=V_{SS}	-	28	55	μA	②
Supply Current (Type H)			-	25	50		
Stand-by Current	I_{STB}	V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{IN} V_{OUT}≦0.95V, V_{CE}=V_{IN}=2.0V	-	0.01	0.10	μA	②
Line Regulation	ΔV_{OUT}/ (ΔV_{IN}・V_{OUT})	$V_{OUT(T)}$+1.0V≦V_{IN}≦6.0V V_{OUT}≦0.95V, 2.0V≦V_{IN}≦6.0V I_{OUT}=30mA V_{OUT}≦1.75V, I_{OUT}=10mA	-	0.01	0.20	%/V	①
Input Voltage	V_{IN}	-	2	-	6	V	-
Output Voltage Temperature Characteristics	ΔV_{OUT}/ (ΔTopr・V_{OUT})	I_{OUT}=30mA -40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	V_{IN}=[$V_{OUT(T)}$+1.0]V+1.0Vp-p_{AC} V_{OUT}≦1.5, V_{IN}=2.5V+1.0Vp-p_{AC} I_{OUT}=50mA、f=10kHz	-	70	-	dB	④
Current Limiter	Ilim	V_{IN}=$V_{OUT(T)}$+2.0V、V_{CE}=V_{SS} 0.9V≦$V_{OUT(T)}$≦1.75V	-	380	-	mA	①
		V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{SS} 1.8V≦$V_{OUT(T)}$≦5.0V					
Short Circuit Current	I_{SHORT}	V_{IN}=$V_{OUT(T)}$+1.0V、 V_{CE}=V_{ss} V_{OUT}≦1.75V, V_{IN}=$V_{OUT(T)}$+2.0V	-	50	-	mA	①
CE 'High' Level Voltage	V_{CEH}	-	1.6	-	V_{IN}	V	①
CE 'Low' Level Voltage	V_{CEL}	-	-	-	0.25	V	①
CE 'High' Level Current	I_{CEH}	V_{CE}=V_{IN}=$V_{OUT(T)}$+1.0V V_{OUT}≦0.95V, V_{CE}=V_{IN}=2.0V	-0.10	-	0.10	μA	②
CE 'Low' Level Current (Type G)	I_{CEL}	V_{IN}=$V_{OUT(T)}$+1.0V、V_{CE}=V_{SS} V_{OUT}≦0.95V, V_{IN}=2.0V	-5.0	-	0.10	μA	②
CE 'Low' Level Current (Type H)			-0.10	-	0.10		

(*1) Unless otherwise stated, V_{IN}=$V_{OUT(T)}$+1.0V. If V_{OUT} is less than 0.95V, V_{IN}= 2.0V.

(*2) $V_{OUT(T)}$ = Specified output voltage

(*3) $V_{OUT(E)}$ = Effective output voltage

The output voltage when "$V_{OUT(T)}$+1.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value.

(*4) Vdif={V_{IN1}-V_{OUT1}}

V_{OUT1}=A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT} {$V_{OUT(T)}$+1.0V} is input.

V_{IN1}=The Input Voltage when V_{OUT1} appears as Input Voltage is gradually decreased.

(*5) If $V_{OUT(T)}$ is less than 1.45V, $V_{OUT(T)}$ -30mV (MIN.), $V_{OUT(T)}$ + 30mV (MAX.)

(*6) Only for the $V_{OUT(T)}$ is more than 3.0V products.

(*7) Please refer to the "Voltage Chart" table.

■ELECTRICAL CHARACTERISTICS (Continued)

●Voltage Chart

SYMBOL	E-0				E-1		E-2		E-3
PARAMETER / OUTPUT VOLTAGE	OUTPUT VOLTAGE (2%) (V)		OUTPUT VOLTAGE (1%) (V)		DROPOUT VOLTAGE1 (mV) (I_{OUT}=30mA)		DROPOUT VOLTAGE2 (mV) (I_{OUT}=100mA)		Power Supply Rejection Ratio
					Ta=25℃		Ta=25℃		Ta=25℃
$V_{OUT(T)}$	V_{OUT}		V_{OUT}		Vdif1		Vdif2		PSRR
	MIN	MAX	MIN	MAX	TYP	MAX	TYP	MAX	TYP
0.90	0.870	0.930	-	-	1100	1110	1150	1200	65
0.95	0.920	0.980	-	-					
1.00	0.970	1.030	-	-	1000	1010	1050	1100	
1.05	1.020	1.080	-	-					
1.10	1.070	1.130	-	-	900	910	950	1000	
1.15	1.120	1.180	-	-					
1.20	1.170	1.230	-	-	800	810	850	900	
1.25	1.220	1.280	-	-					
1.30	1.270	1.330	-	-	700	710	750	800	
1.35	1.320	1.380	-	-					
1.40	1.370	1.430	-	-	600	610	650	700	
1.45	1.420	1.480	-	-					
1.50	1.470	1.530	-	-	500	510	550	600	
1.55	1.519	1.581	-	-					
1.60	1.568	1.632	-	-	400	410	500	550	
1.65	1.617	1.683	-	-					
1.70	1.666	1.734	-	-	300	310	400	450	
1.75	1.715	1.785	-	-					
1.80	1.764	1.836	-	-	200	210	300	400	70
1.85	1.813	1.887	-	-					
1.90	1.862	1.938	-	-	120	150	280	380	
1.95	1.911	1.989	-	-					
2.00	1.960	2.040	-	-	80	120	240	350	
2.05	2.009	2.091	-	-					
2.10	2.058	2.142	-	-				330	
2.15	2.107	2.193	-	-					
2.20	2.156	2.244	-	-					
2.25	2.205	2.295	-	-					
2.30	2.254	2.346	-	-				310	
2.35	2.303	2.397	-	-					
2.40	2.352	2.448	-	-					
2.45	2.401	2.499	-	-					
2.50	2.450	2.550	-	-	70	100	220	290	
2.55	2.499	2.601	-	-					
2.60	2.548	2.652	-	-					
2.65	2.597	2.703	-	-					
2.70	2.646	2.754	-	-					
2.75	2.695	2.805	-	-					
2.80	2.744	2.856	-	-				270	
2.85	2.793	2.907	-	-					
2.90	2.842	2.958	-	-					
2.95	2.891	3.009	-	-					

■ELECTRICAL CHARACTERISTICS (Continued)

●Voltage Chart

SYMBOL	E-0				E-1		E-2		E-3
PARAMETER / OUTPUT VOLTAGE	OUTPUT VOLTAGE (2%) (V)		OUTPUT VOLTAGE (1%) (V)		DROPOUT VOLTAGE1 (mV) (I_{OUT}=30mA)		DROPOUT VOLTAGE2 (mV) (I_{OUT}=100mA)		Power Supply Rejection Ratio
					Ta=25℃		Ta=25℃		Ta=25℃
$V_{OUT(T)}$	V_{OUT}		V_{OUT}		Vdif1		Vdif2		PSRR
	MIN	MAX	MIN	MAX	TYP	MAX	TYP	MAX	TYP
3.00	2.940	3.060	2.970	3.030	60	90	200	270	70
3.05	2.989	3.111	3.020	3.081					
3.10	3.038	3.162	3.069	3.131				250	
3.15	3.087	3.213	3.119	3.182					
3.20	3.136	3.264	3.168	3.232					
3.25	3.185	3.315	3.218	3.283					
3.30	3.234	3.366	3.267	3.333					
3.35	3.283	3.417	3.317	3.384					
3.40	3.332	3.468	3.366	3.434					
3.45	3.381	3.519	3.416	3.485					
3.50	3.430	3.570	3.465	3.535					
3.55	3.479	3.621	3.515	3.586					
3.60	3.528	3.672	3.564	3.636					
3.65	3.577	3.723	3.614	3.687					
3.70	3.626	3.774	3.663	3.737					
3.75	3.675	3.825	3.713	3.788					
3.80	3.724	3.876	3.762	3.838					
3.85	3.773	3.927	3.812	3.889					
3.90	3.822	3.978	3.861	3.939					
3.95	3.871	4.029	3.911	3.990					
4.00	3.920	4.080	3.960	4.040		80	180	230	
4.05	3.969	4.131	4.010	4.091					
4.10	4.018	4.182	4.059	4.141					
4.15	4.067	4.233	4.109	4.192					
4.20	4.116	4.284	4.158	4.242					
4.25	4.165	4.335	4.208	4.293					
4.30	4.214	4.386	4.257	4.343					
4.35	4.263	4.437	4.307	4.394					
4.40	4.312	4.488	4.356	4.444					
4.45	4.361	4.539	4.405	4.494					
4.50	4.410	4.590	4.455	4.545					
4.55	4.459	4.641	4.504	4.595					
4.60	4.508	4.692	4.554	4.646					
4.65	4.557	4.743	4.603	4.696					
4.70	4.606	4.794	4.653	4.747					
4.75	4.655	4.845	4.702	4.797					
4.80	4.704	4.896	4.752	4.848					
4.85	4.753	4.947	4.801	4.898					
4.90	4.802	4.998	4.851	4.949					
4.95	4.851	5.049	4.900	4.999					
5.00	4.900	5.100	4.950	5.050	50	70	160	210	

■ELECTRICAL CHARACTERISTICS (Continued)


●Specification & Condition by Series

SYMBOL	E-5	E-4
CONDITION, RATINGS / OUTPUT VOLTAGE (V)	INPUT VOLTAGE (V)	MAX. OUTPUT CURRENT (mA)
	V_{IN}	MIN
0.90～0.95	2.5	260
1.00～1.05	2.5	260
1.10～1.15	2.6	270
1.20～1.25	2.7	290
1.30～1.35	2.8	300
1.40～1.45	2.9	
1.50～1.95	3.0	
2.00～6.00	$V_{OUT(T)}$+1.0	


* $V_{OUT(T)}$=Nominal output voltage

■TEST CIRCUITS


Circuit ①

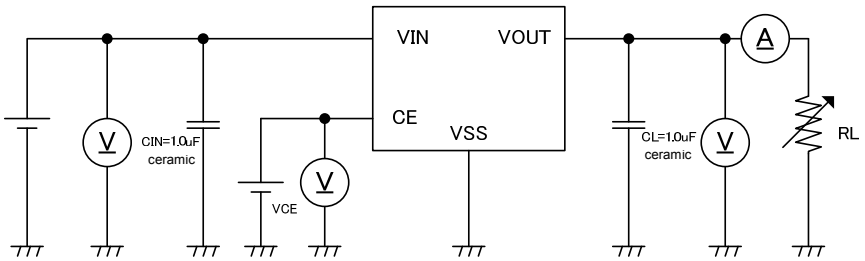


Circuit ②

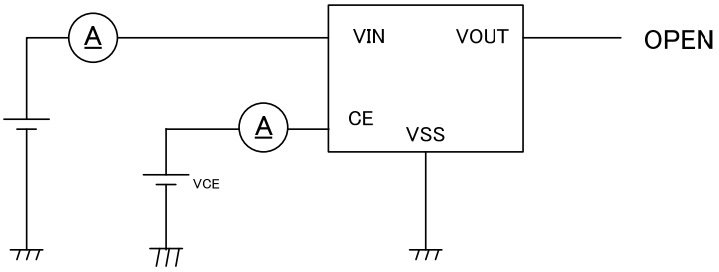

Circuit ③

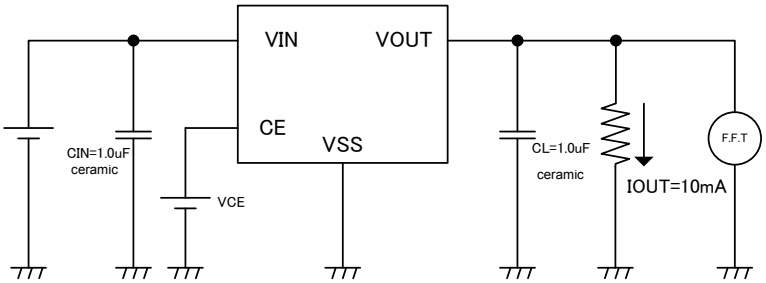

Circuit ④

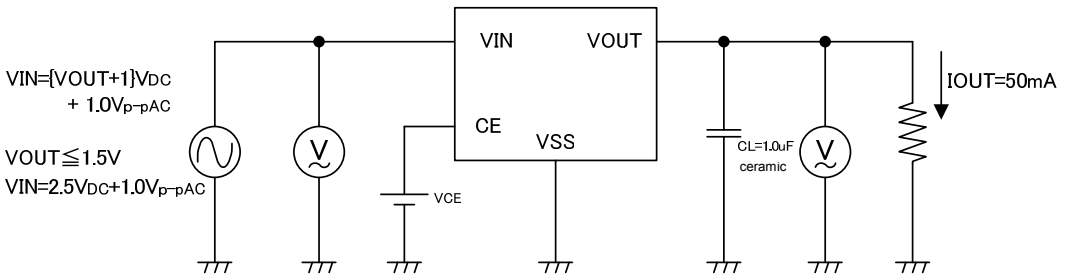

*TEST CIRCUIT V_{CE} (CE Pin Voltage)

ACTIVE

XC6211/XC6219 Type A,B,E,F: $V_{CE}=V_{IN}$

XC6211/XC6219 Type C,D,G,H: $V_{CE}=V_{SS}$

STANDBY


XC6211/XC6219 Type A,B,E,F: $V_{CE}=V_{SS}$

XC6211/XC6219 Type C,D,G,H: $V_{CE}=V_{IN}$

■OPERATIONAL EXPLANATION

<Output Voltage Control>

The voltage divided by resistors R1 & R2 is compared with the internal reference voltage by the error amplifier. The P-channel MOSFET, which is connected to the VOUT pin, is then driven by the subsequent output signal. The output voltage at the VOUT pin is controlled and stabilized by a system of negative feedback. The current limit circuit and short protect circuit operate in relation to the level of output current. Further, the IC's internal circuitry can be shutdown via the CE pin's signal

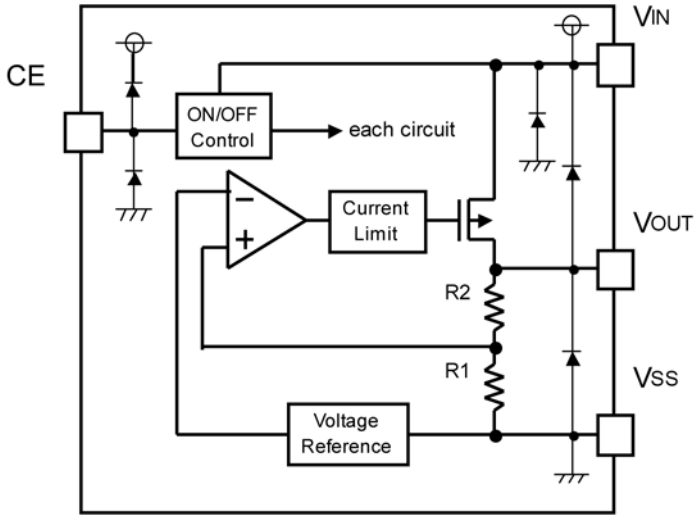

<Low ESR Capacitors>

With the XC6219/XC6211 series, a stable output voltage is achievable even if used with low ESR capacitors as a phase compensation circuit is built-in. In order to ensure the effectiveness of the phase compensation, we suggest that an output capacitor (C_L) is connected as close as possible to the output pin (VOUT) and the VSS pin. Please use an output capacitor with a capacitance value of at least 1.0μF. Also, please connect an input capacitor (C_{IN}) of 1.0μF between the VIN pin and the VSS pin in order to ensure a stable power input.

Stable phase compensation may not be ensured if the capacitor runs out capacitance when depending on bias and temperature. In case the capacitor depends on the bias and temperature, please make sure the capacitor can ensure the actual capacitance.

<Current Limiter, Short-Circuit Protection>

The XC6219/XC6211 series includes a combination of a fixed current limiter circuit & a foldback circuit, which aid the operations of the current limiter and circuit protection. When the load current reaches the current limit level, the fixed current limiter circuit operates and output voltage drops. As a result of this drop in output voltage, the foldback circuit operates, output voltage drops further and output current decreases. When the output pin is shorted, a current of about 50mA flows.

<CE Pin>

The IC's internal circuitry can be shutdown via the signal from the CE pin with the XC6219/6211 series. In shutdown mode, output at the VOUT pin will be pulled down to the VSS level via R1 & R2. The operational logic of the IC's CE pin is selectable (please refer to the selection guide). Note that as the standard XC6219/6211B type's regulator 1 and 2 are both ' High Active/No Pull-Down', operations will become unstable with the CE pin open. Although the CE pin is equal to an inverter input with CMOS hysteresis, with either the pull-up or pull-down options, the CE pin input current will increase when the IC is in operation. We suggest that you use this IC with either a VIN voltage or a VSS voltage input at the CE pin. If this IC is used with the correct specifications for the CE pin, the operational logic is fixed and the IC will operate normally. However, supply current may increase as a result of through current in the IC's internal circuitry.


■NOTES ON USE

1. For temporary, transitional voltage drop or voltage rising phenomenon, the IC is liable to malfunction should the ratings be exceeded.
2. Where wiring impedance is high, operations may become unstable due to noise and/or phase lag depending on output current. Please keep the resistance low between V_{IN} and V_{SS} wiring in particular.
3. Please wire the input capacitor (C_{IN}) and the output capacitor (C_L) as close to the IC as possible.
4. The IC is controlled with constant current start-up. Start-up sequence control is requested to draw a load current after even nominal output voltage rising up the output voltage.
5. Torex places an importance on improving our products and their reliability.
   We request that users incorporate fail-safe designs and post-aging protection treatment when using Torex products in their systems.


■TYPICAL PERFORMANCE CHARACTERISTICS

(1) Output Voltage vs. Output Current


XC6219/11x182

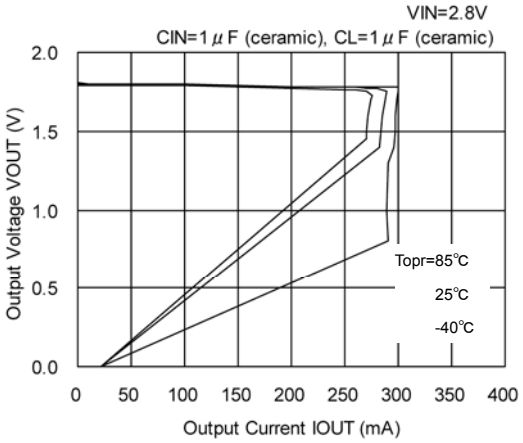


XC6219/11x182

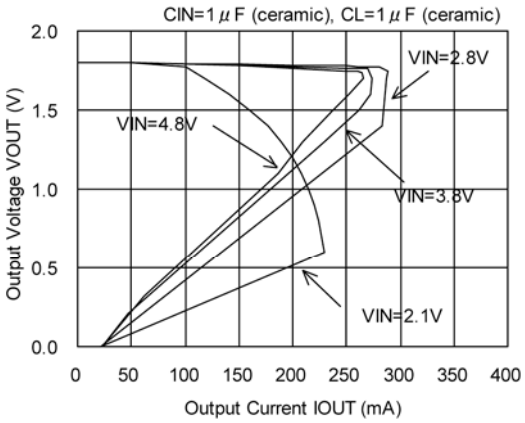


XC6219/11x252

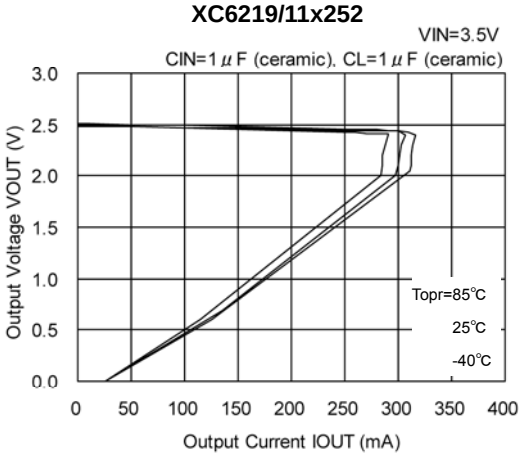


XC6219/11x252

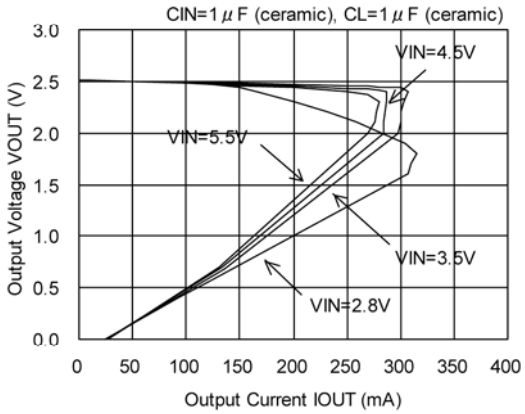

XC6219/11x302

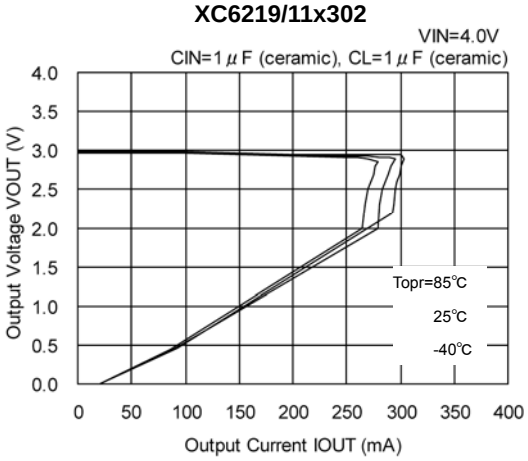


XC6219/11x302

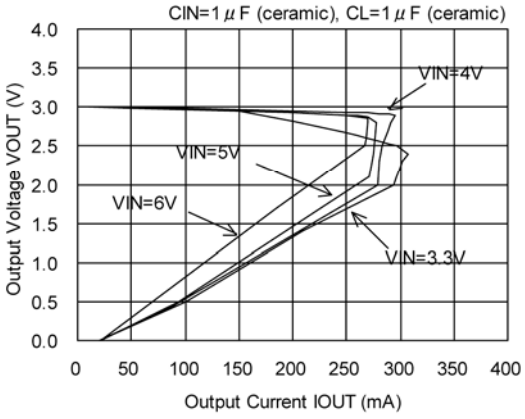


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(2) Output Voltage vs. Input Voltage


XC6219/11x182

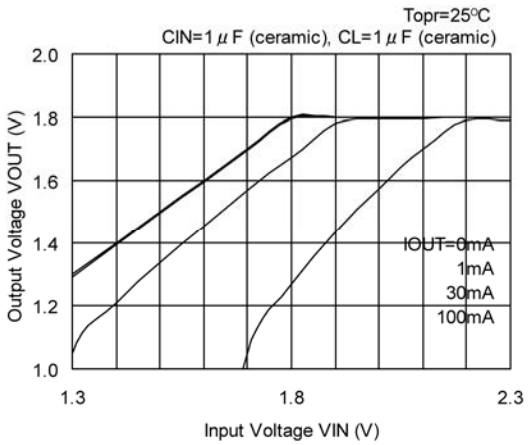


XC6219/11x182

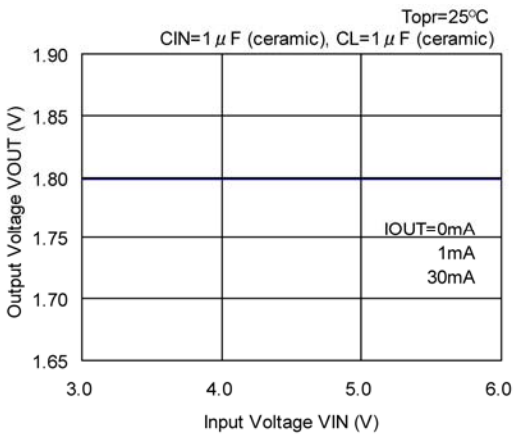


XC6219/11x252

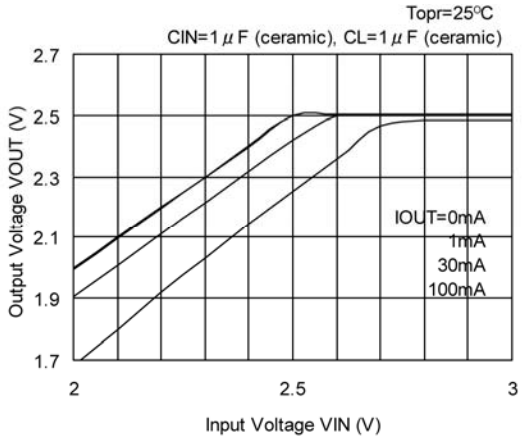


XC6219/11x252

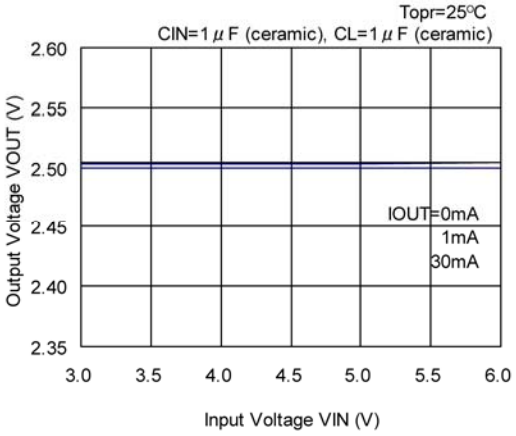

XC6219/11x302

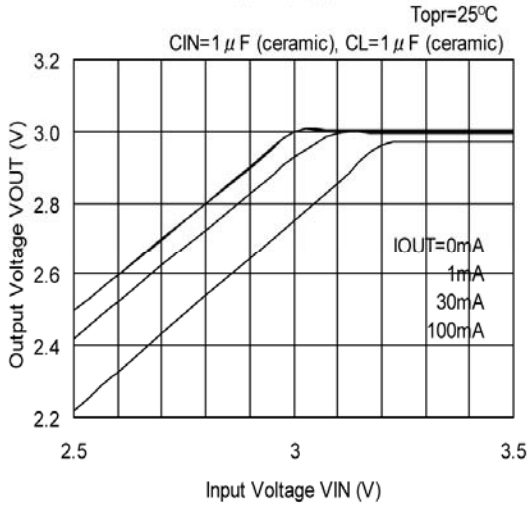


XC6219/11x302

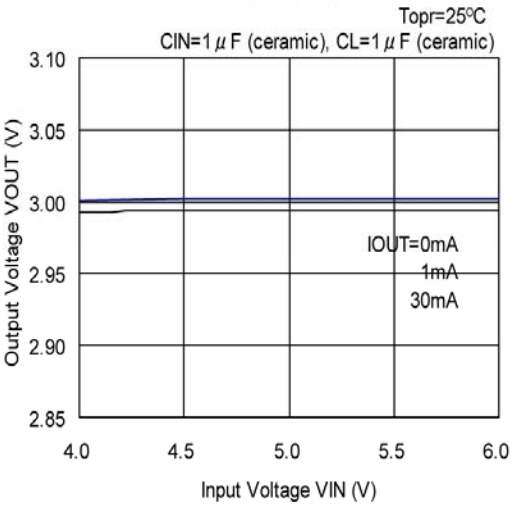


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(3) Dropout Voltage vs. Output Current


XC6219/11x182

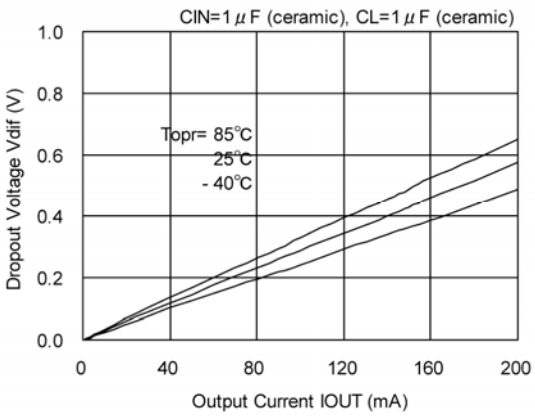

XC6219/11x252

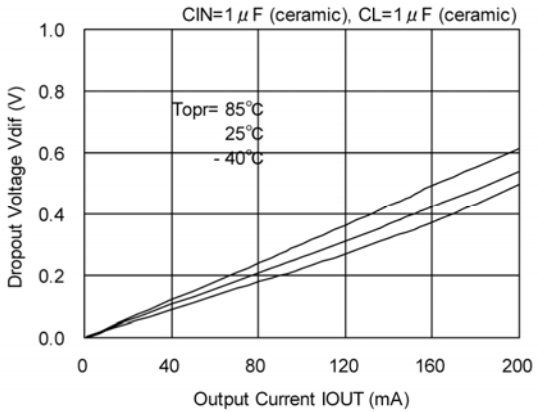


XC6219/11x302

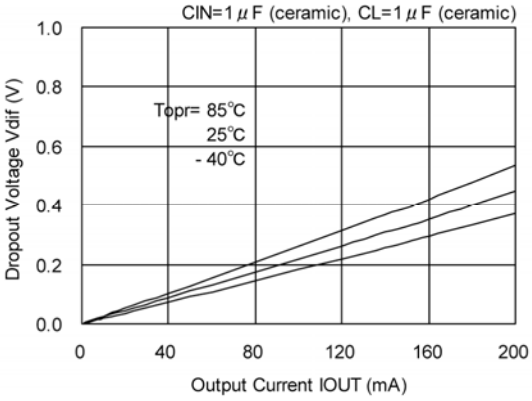


(4) Supply Current vs. Input Voltage

XC6219/11x182

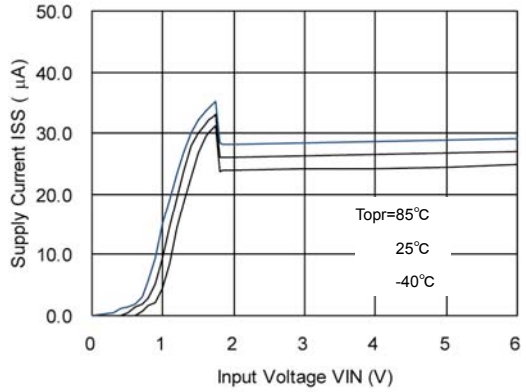


XC6219/11x252

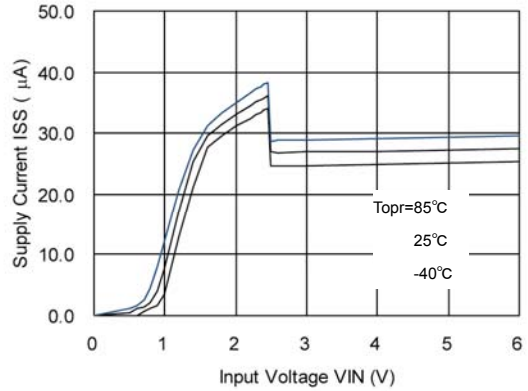

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(4) Supply Current vs. Input Voltage (Continued)

XC6219/11x302

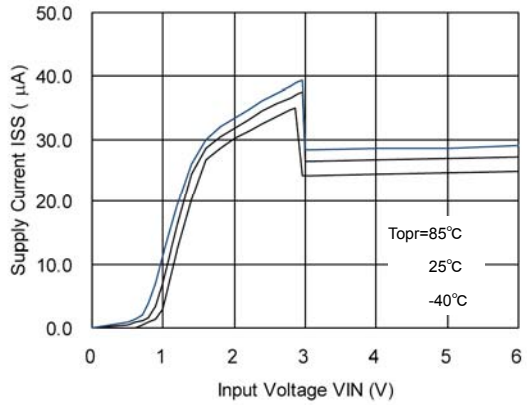


(5) Output Voltage vs. Ambient Temperature


XC6219/11x182

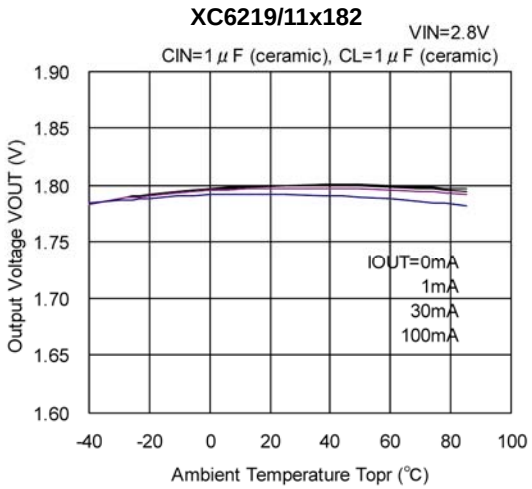

XC6219/11x252

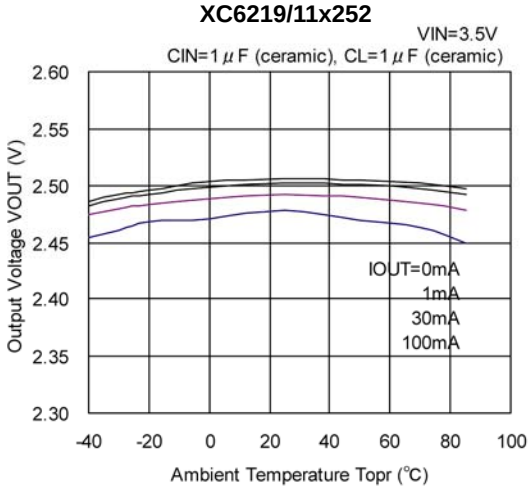


XC6219/11x302

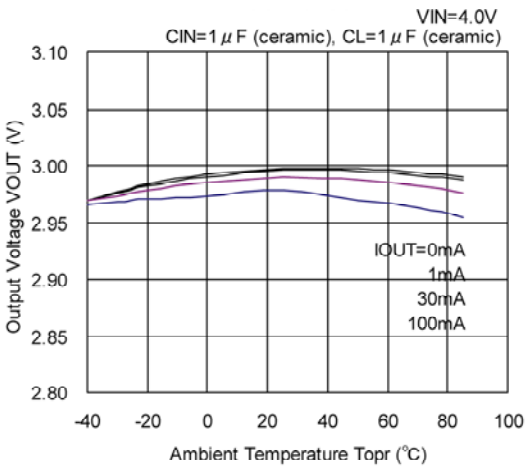


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(6) Supply Current vs. Ambient Temperature


XC6219/11x182

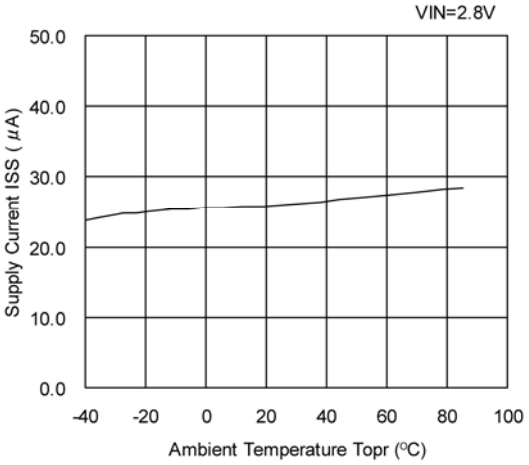

XC6219/11x252

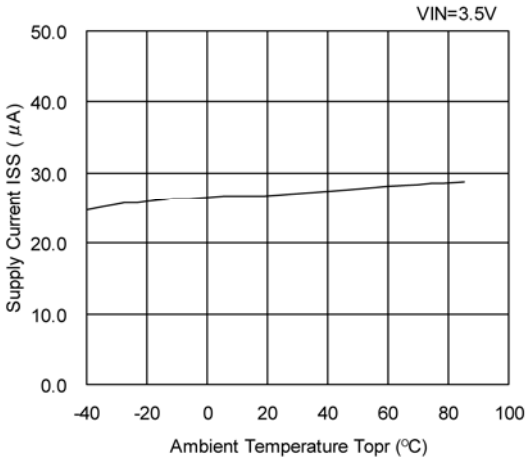


XC6219/11x302

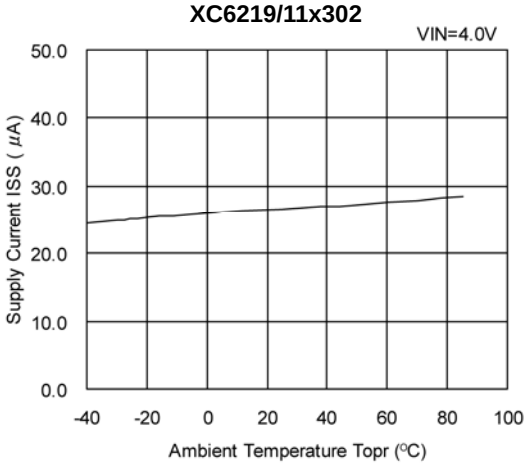


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(7) Input Transient Response


XC6219/11x182

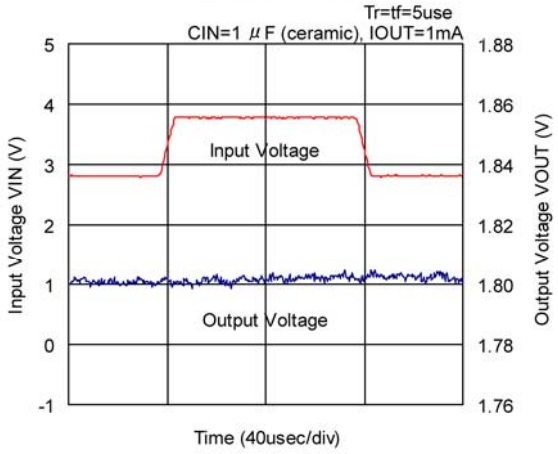


XC6219/11x182

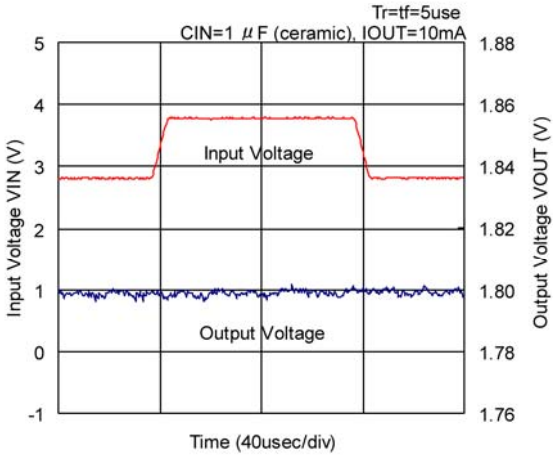


XC6219/11x182

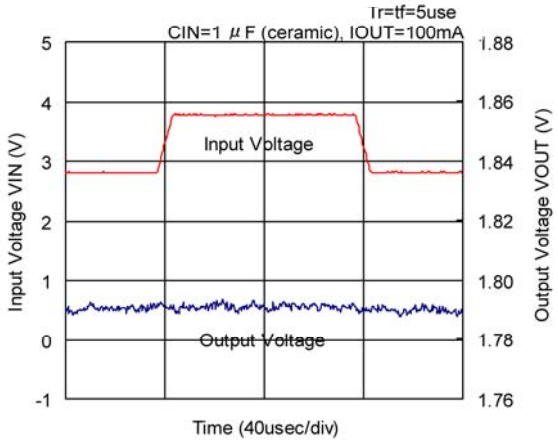


XC6219/11x252

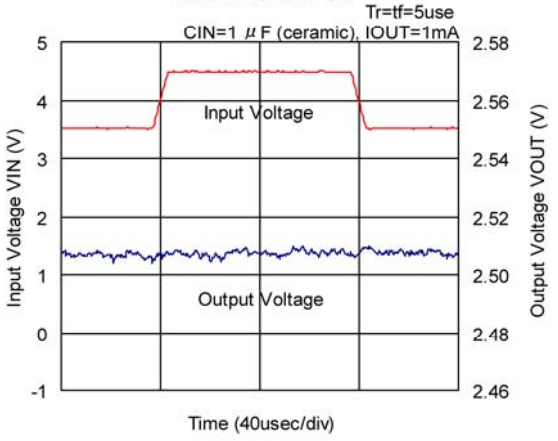

XC6219/11x252

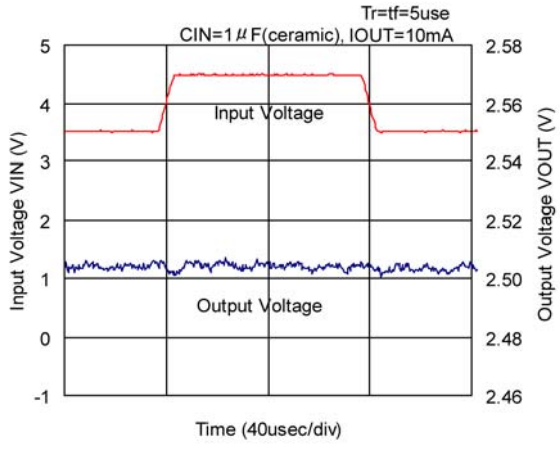


XC6219/11x252

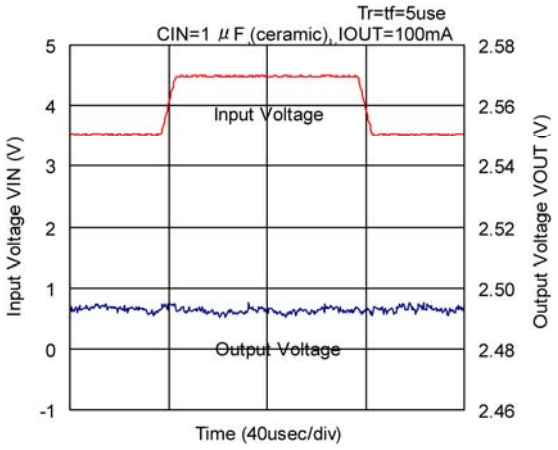


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(7) Input Transient Response (Continued)


XC6219/11x302

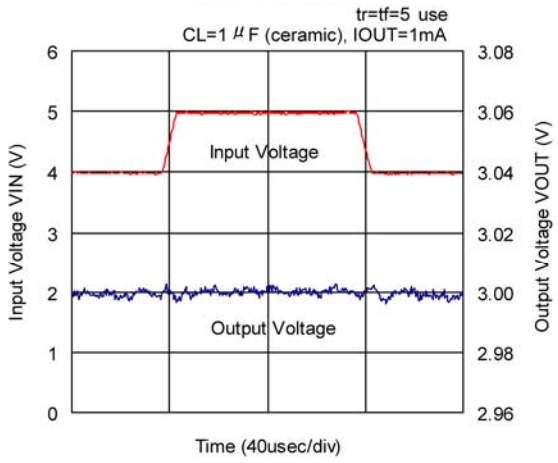

XC6219/11x302

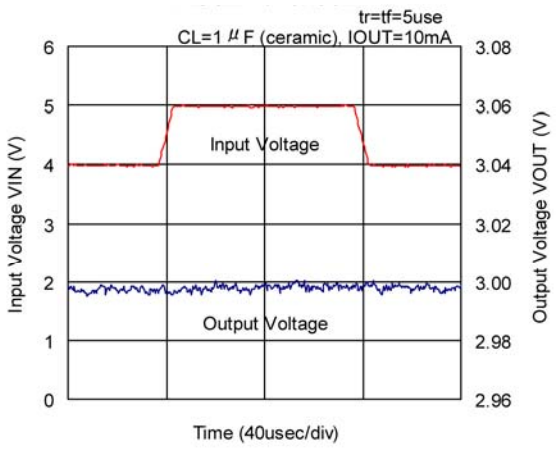


XC6219/11x302

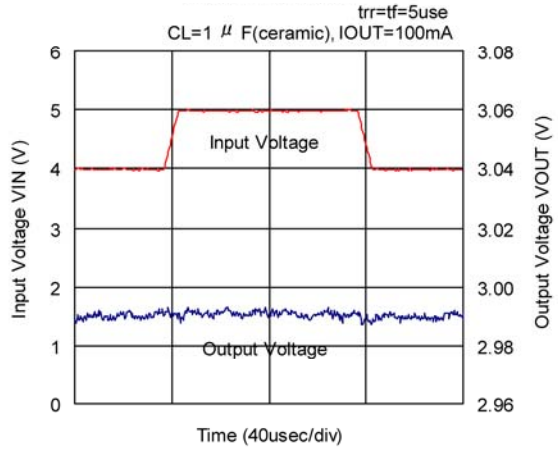


(8) Load Transient Response

XC6219/11x182

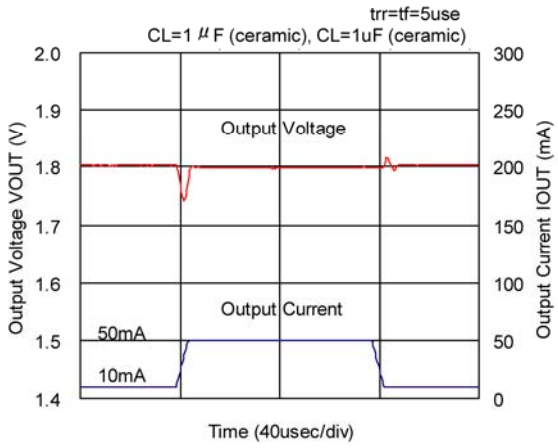


XC6219/11x182

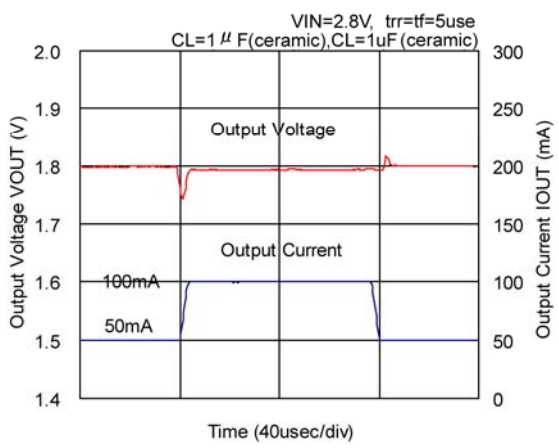


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(8) Load Transient Response (Continued)


XC6219/11x182

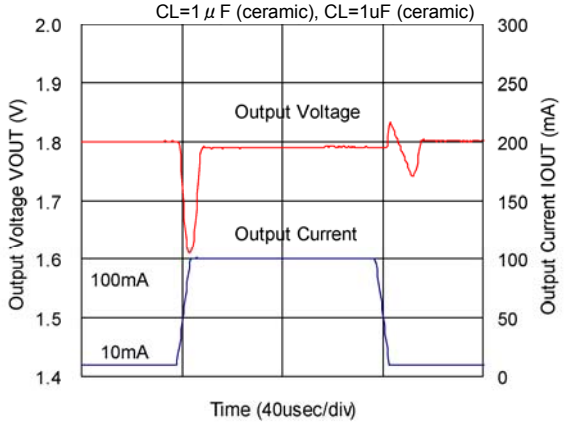


XC6219/11x252

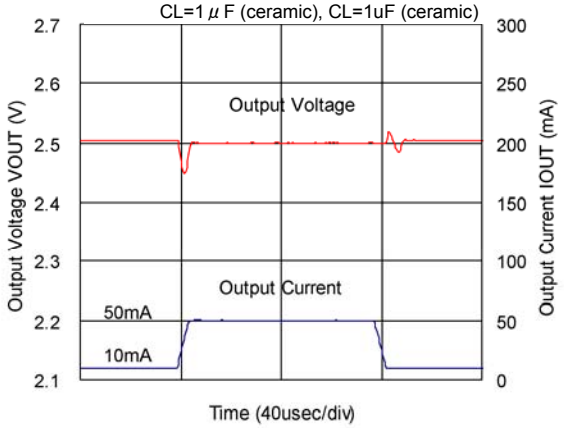


XC6219/11x252

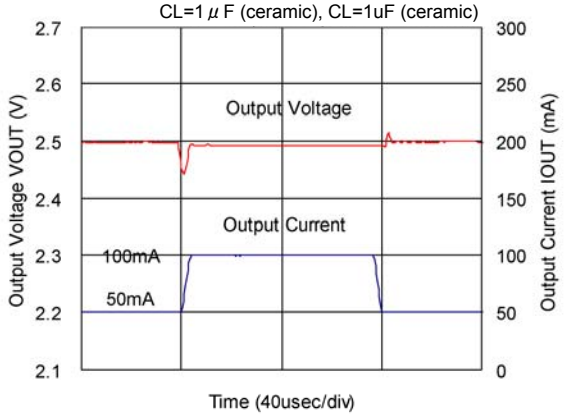


XC6219/11x252

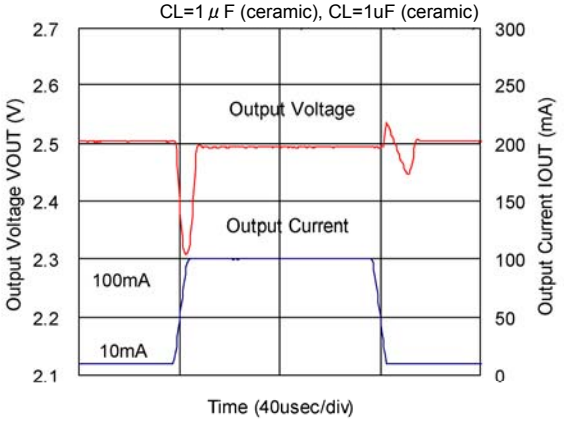

XC6219/11x302

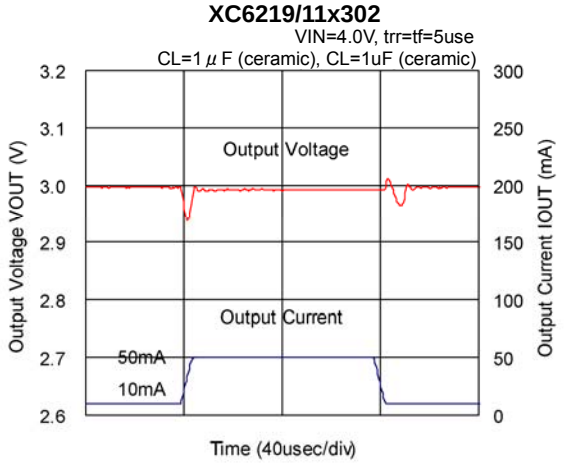

XC6219/11x302

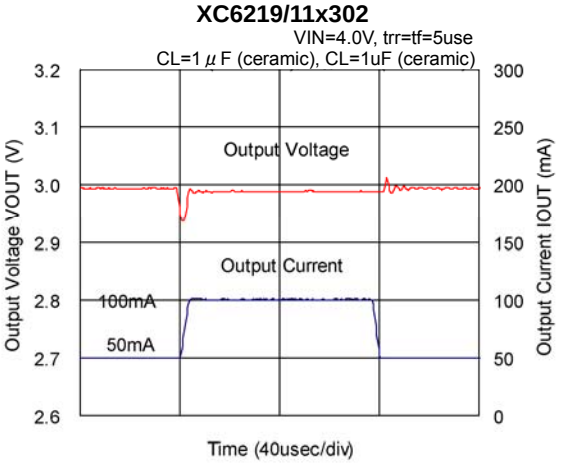


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(8) Load Transient Response (Continued)

XC6219/11x302


VIN=4.0V, trr=tf=5use
CL=1 μF (ceramic), CL=1uF (ceramic)

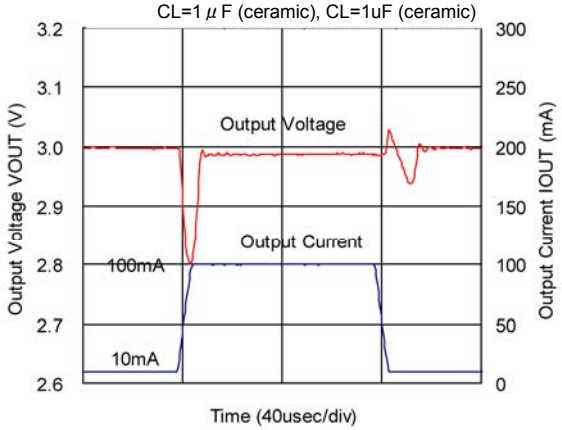

(9) Ripple Rejection Rate


XC6219/11x182

VIN=2.8V, DC+1Vp-pAC
IOUT=50mA, CL=1uF (ceramic)

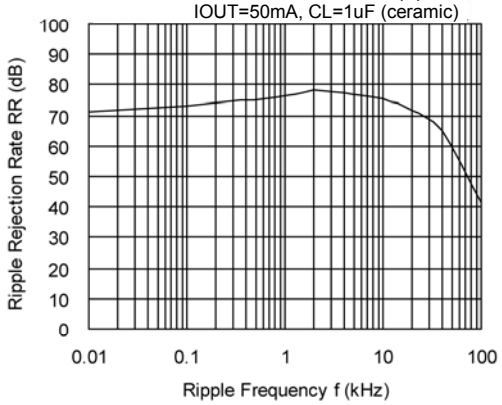


XC6219/11x252

VIN=2.8V, DC+1Vp-pAC
IOUT=50mA, CL=1uF (ceramic)

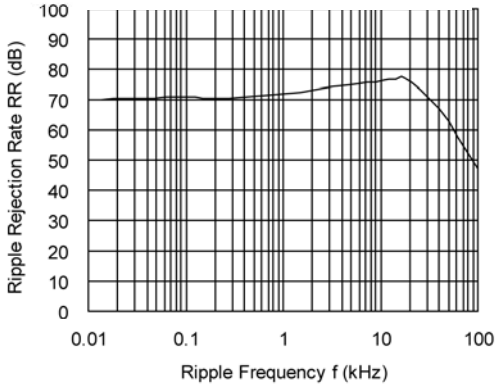


XC6219/11x302

VIN=2.8V, DC+1Vp-pAC
IOUT=50mA, CL=1uF (ceramic)

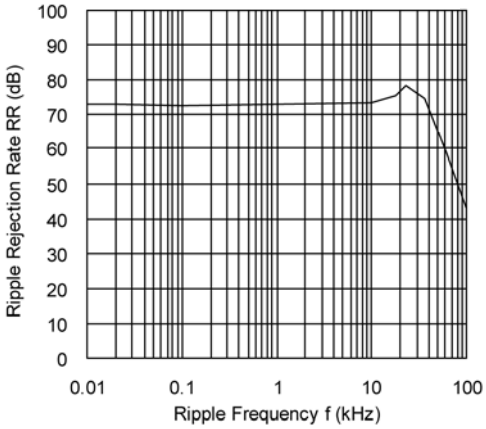


■PACKAGING INFORMATION


●SOT-25

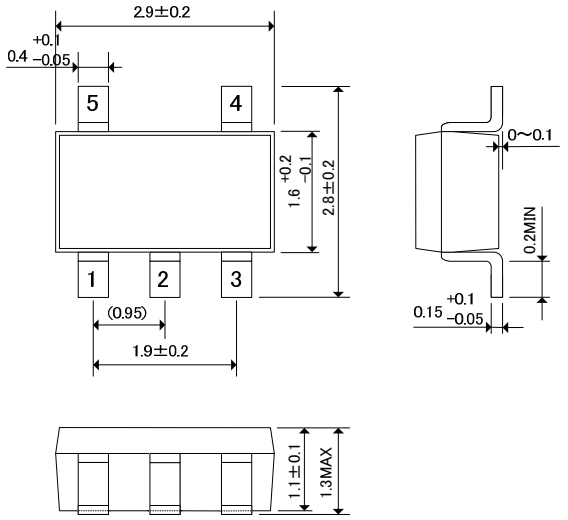


●SOT-89-5

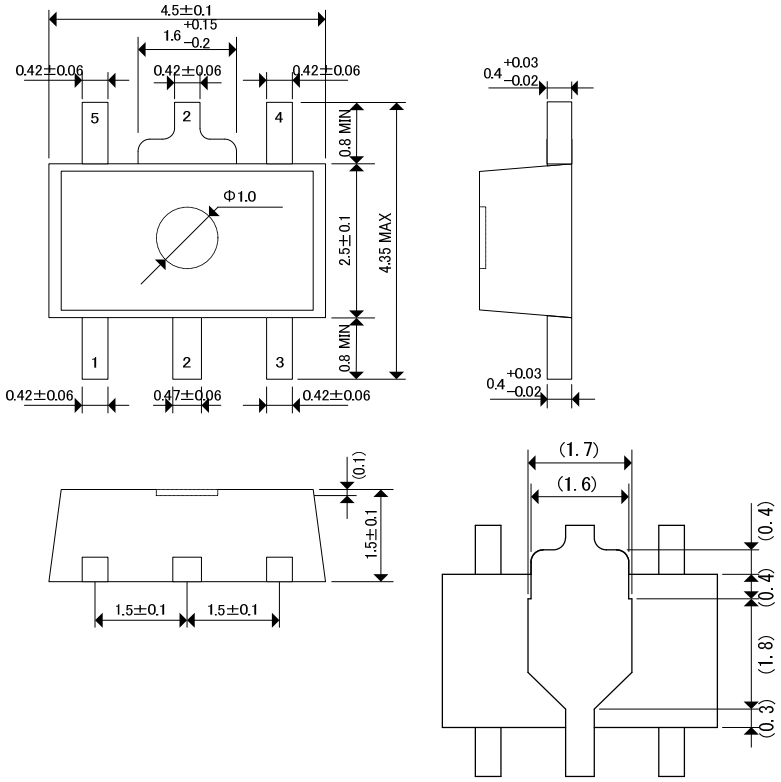


●USP-6B

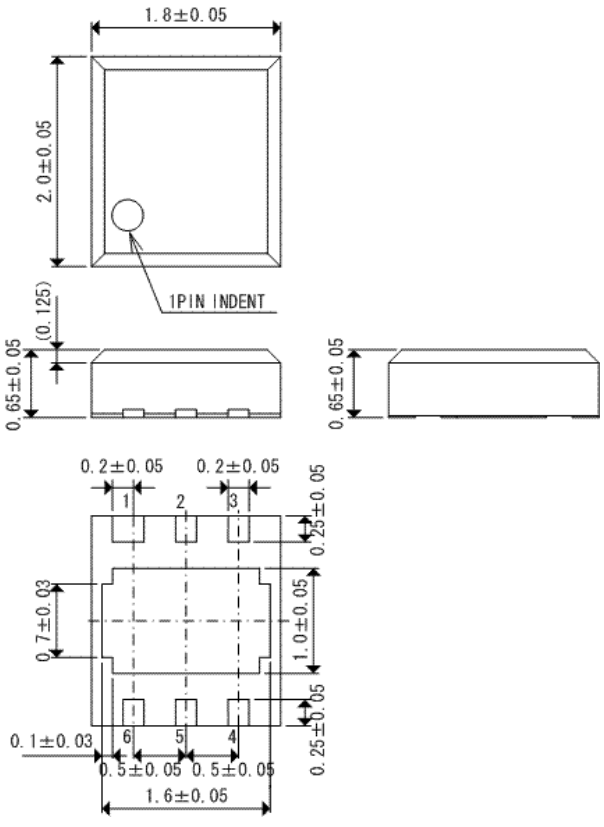

●USP-6B Reference Pattern Layout

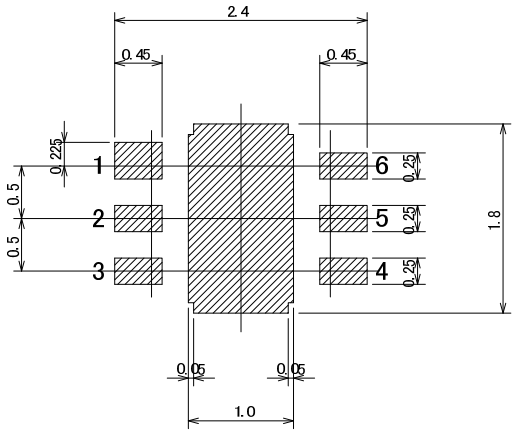

●USP-6B Reference Metal Mask Design

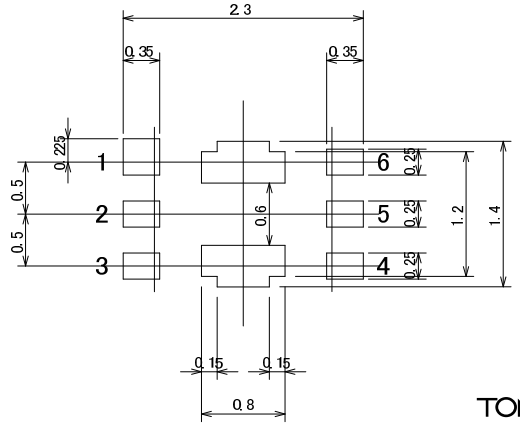


● SOT-25 Power Dissipation

Power dissipation data for the SOT-25 is shown in this page.
The value of power dissipation varies with the mount board conditions.
Please use this data as the reference data taken in the following condition.

1. Measurement Condition

Condition:	Mount on a board
Ambient:	Natural convection
Soldering:	Lead (Pb) free
Board Dimensions:	40 x 40 mm (1600 mm^2 in one side)
Metal Area :	Copper (Cu) traces occupy 50% of the board area in top and back faces. Package heat-sink is tied to the copper traces
Material:	Glass Epoxy (FR-4)
Thickness:	1.6 mm
Through-hole:	4 x 0.8 Diameter

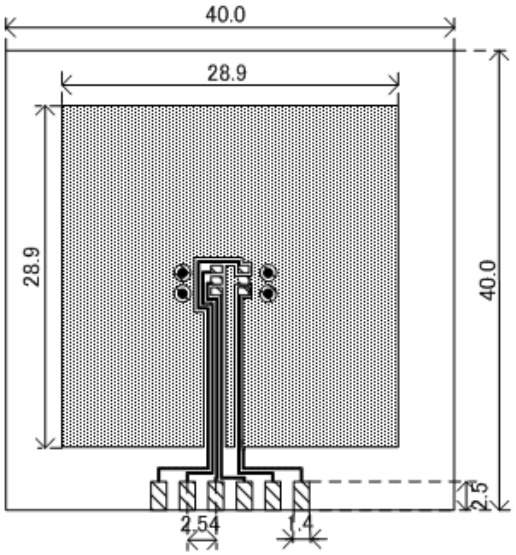


Evaluation Board (Unit: mm)

2. Power Dissipation vs. Ambient Temperature (85℃)

Board Mount (Tjmax=125℃)

Ambient Temperature (℃)	Power Dissipation Pd (mW)	Thermal Resistance (℃/W)
25	600	166.67
85	240	

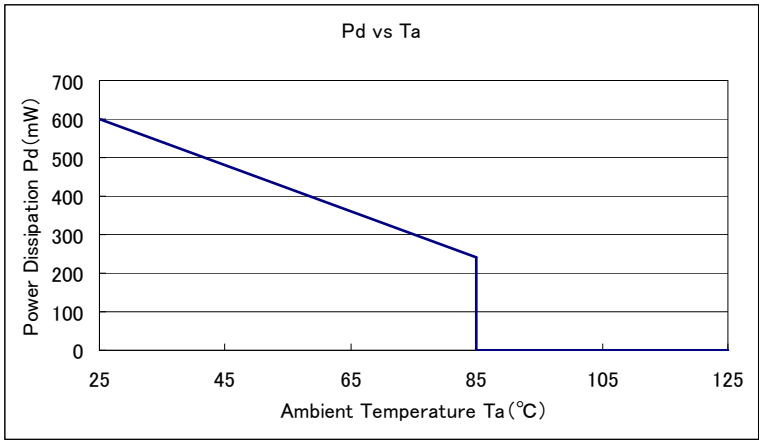


● SOT-89-5 Power Dissipation

Power dissipation data for the SOT-89-5 is shown in this page.
The value of power dissipation varies with the mount board conditions.
Please use this data as the reference data taken in the following condition.

1. Measurement Condition

Condition:	Mount on a board
Ambient:	Natural convection
Soldering:	Lead (Pb) free
Board Dimensions:	40 x 40 mm (1600 mm^2 in one side)
Metal Area :	Copper (Cu) traces occupy 50% of the board area in top and back faces. Package heat-sink is tied to the copper traces
Material:	Glass Epoxy (FR-4)
Thickness:	1.6 mm
Through-hole:	5 x 0.8 Diameter

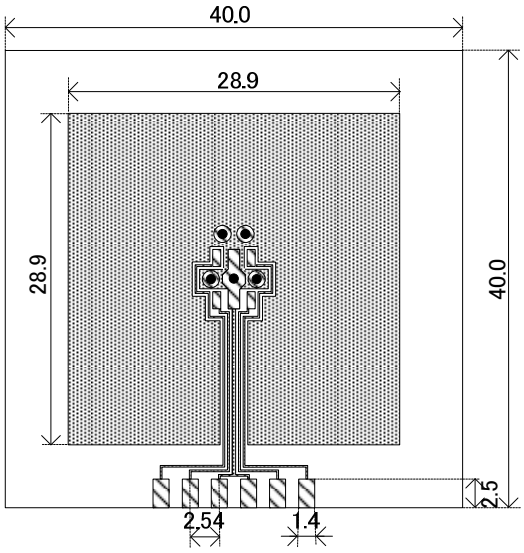


Evaluation Board (Unit: mm)

2. Power Dissipation vs. Ambient Temperature (85℃)

Board Mount (Tjmax=125℃)

Ambient Temperature (℃)	Power Dissipation Pd (mW)	Thermal Resistance (℃/W)
25	1300	76.92
85	520	

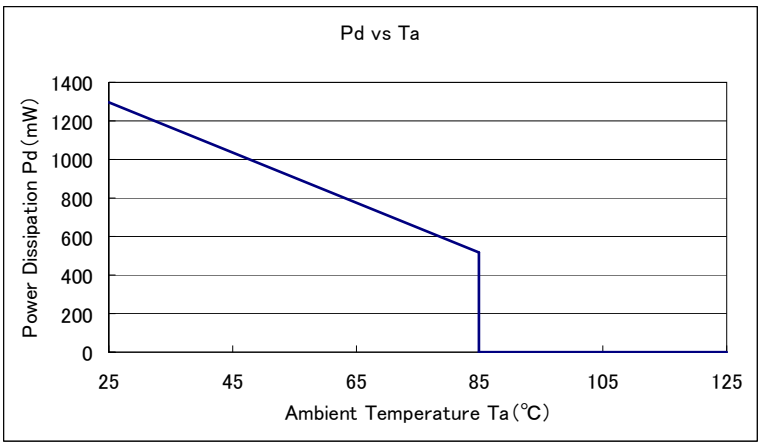


● USP-6B Power Dissipation

Power dissipation data for the USP-6B is shown in this page.
The value of power dissipation varies with the mount board conditions.
Please use this data as the reference data taken in the following condition.

1. Measurement Condition

Condition:	Mount on a board
Ambient:	Natural convection
Soldering:	Lead (Pb) free
Board Dimensions:	40 x 40 mm (1600 mm^2 in one side)
Metal Area:	Copper (Cu) traces occupy 50% of the board area in top and back faces. Package heat-sink is tied to the copper traces
Material:	Glass Epoxy (FR-4)
Thickness:	1.6 mm
Through-hole:	4 x 0.8 Diameter

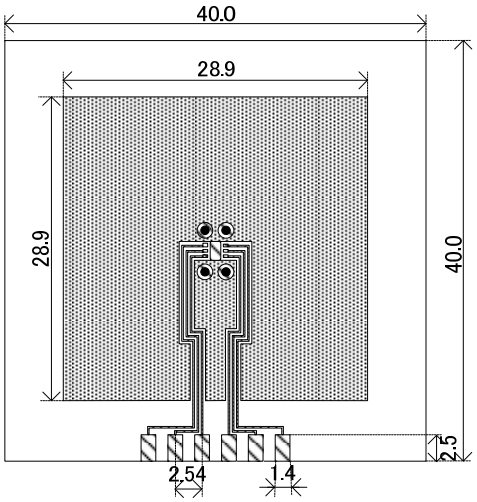


Evaluation Board (Unit: mm)

2. Power Dissipation vs. Ambient Temperature

Board Mount (Tj max = 125℃)


Ambient Temperature（℃）	Power Dissipation Pd（mW）	Thermal Resistance(℃/W)
25	1000	100.00
85	400	

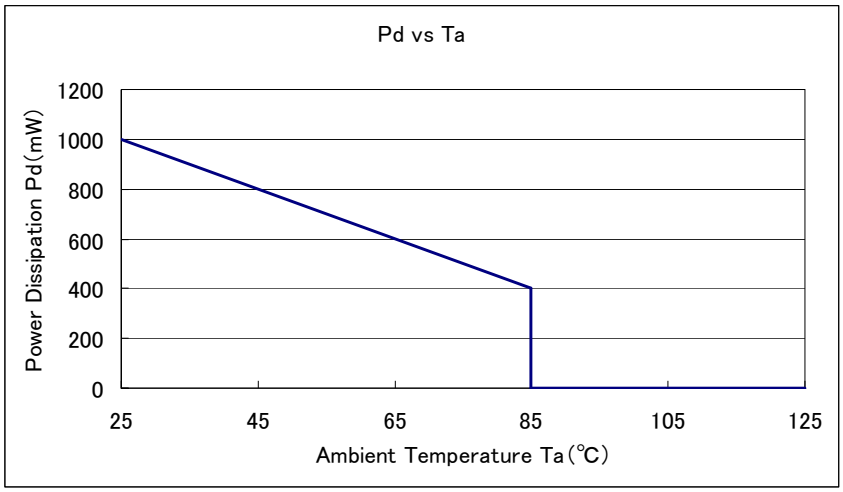


■MARKING RULE

[XC6219 Series]

●SOT-25, SOT-89-5



SOT-25
(TOP VIEW)



SOT-89-5
(TOP VIEW)

① represents product series

MARK	PRODUCT SERIES
L	XC6219xxxxxx

② represents type of regulator

MARK				PRODUCT SERIES
V_{OUT} 100mV INCREMENTS		V_{OUT} 50mV INCREMENTS		
V_{OUT}:0.1~3.0V	V_{OUT}:3.1~6.0V	V_{OUT}:0.15~3.05V	V_{OUT}:3.15~6.05V	
V	A	E	L	XC6219Axxxxx
X	B	F	M	XC6219Bxxxxx
Y	C	H	N	XC6219Cxxxxx
Z	D	K	P	XC6219Dxxxxx
V	A	E	L	XC6219Exxxxx
X	B	F	M	XC6219Fxxxxx
Y	C	H	N	XC6219Gxxxxx
Z	D	K	P	XC6219Hxxxxx


③ represents output voltage

MARK	OUTPUT VOLTAGE (V)				MARK	OUTPUT VOLTAGE (V)			
0	-	3.1	-	3.15	F	1.6	4.6	1.65	4.65
1	-	3.2	-	3.25	H	1.7	4.7	1.75	4.75
2	-	3.3	-	3.35	K	1.8	4.8	1.85	4.85
3	-	3.4	-	3.45	L	1.9	4.9	1.95	4.95
4	-	3.5	-	3.55	M	2.0	5.0	2.05	-
5	-	3.6	-	3.65	N	2.1	-	2.15	-
6	-	3.7	-	3.75	P	2.2	-	2.25	-
7	-	3.8	-	3.85	R	2.3	-	2.35	-
8	0.9	3.9	0.95	3.95	S	2.4	-	2.45	-
9	1.0	4.0	1.05	4.05	T	2.5	-	2.55	-
A	1.1	4.1	1.15	4.15	U	2.6	-	2.65	-
B	1.2	4.2	1.25	4.25	V	2.7	-	2.75	-
C	1.3	4.3	1.35	4.35	X	2.8	-	2.85	-
D	1.4	4.4	1.45	4.45	Y	2.9	-	2.95	-
E	1.5	4.5	1.55	4.55	Z	3.0	-	3.05	-

④ represents production lot number
0 to 9, A to Z reverse character of 0 to 9, A to Z repeated (G, I, J, O, Q, W excluded)

■MARKING RULE (Continued)

●USP-6B



USP-6B
(TOP VIEW)

①② represents product series

MARK		PRODUCT SERIES
①	②	
1	9	XC6219xxxxDx

③ represents type of regulator

MARK	TYPE	PRODUCT SERIES
A	High Active, pull-down resistor built-in (semi-custom)	XC6219AxxxMx
B	High Active, no pull-down resistor built-in (standard)	XC6219BxxxMx
C	Low Active, pull-up resistor built-in (semi-custom)	XC6219CxxxMx
D	Low Active, no pull-up resistor built-in (semi-custom)	XC6219DxxxMx
E	High Active, pull-down resistor built-in (semi-custom)	XC6219ExxxDx
F	High Active, no pull-down resistor built-in (standard)	XC6219FxxxDx
Z	Low Active, pull-up resistor built-in (semi-custom)	XC6219GxxxDx
H	Low Active, no pull-up resistor built-in (semi-custom)	XC6219HxxxDx

④ represents product series

MARK	VOLTAGE (V)	PRODUCT SERIES
3	3.X	XC6219x3xxDx
5	5.X	XC6219x5xxDx

⑤ represents output voltage


MARK	VOLTAGE	PRODUCT SERIES	SYMBOL	VOLTAGE	PRODUCT SERIES
0	X.0	XC6219xx0xDx	A	X.05	XC6219xx0ADx
1	X.1	XC6219xx1xDx	B	X.15	XC6219xx1ADx
2	X.2	XC6219xx2xDx	C	X.25	XC6219xx2ADx
3	X.3	XC6219xx3xDx	D	X.35	XC6219xx3ADx
4	X.4	XC6219xx4xDx	E	X.45	XC6219xx4ADx
5	X.5	XC6219xx5xDx	F	X.55	XC6219xx5ADx
6	X.6	XC6219xx6xDx	H	X.65	XC6219xx6ADx
7	X.7	XC6219xx7xDx	K	X.75	XC6219xx7ADx
8	X.8	XC6219xx8xDx	L	X.85	XC6219xx8ADx
9	X.9	XC6219xx9xDx	M	X.95	XC6219xx9ADx

⑥ represents production lot number
0 to 9, A to Z repeated (G, I, J, O, Q, W excluded)
* No character inversion used.

■MARKING RULE (Continued)

[XC6211 Series]

●SOT-25



SOT-25
(TOP VIEW)

① represents product series

MARK	PRODUCT SERIES
A	XC6211xxxxMx

② represents type of regulator

MARK				PRODUCT SERIES
VOUT 100mV INCREMENTS		VOUT 50mV INCREMENTS		
VOUT:0.1~3.0V	VOUT:3.1~6.0V	VOUT:0.15~3.05V	VOUT:3.15~6.05V	
V	A	E	L	XC6211AxxxMx
X	B	F	M	XC6211BxxxMx
Y	C	H	N	XC6211CxxxMx
Z	D	K	P	XC6211DxxxMx
V	A	E	L	XC6211ExxxMx
X	B	F	M	XC6211FxxxMx
Y	C	H	N	XC6211GxxxMx
Z	D	K	P	XC6211HxxxMx

③ represents output voltage

MARK	OUTPUT VOLTAGE (V)				MARK	OUTPUT VOLTAGE (V)			
0	-	3.1	-	3.15	F	1.6	4.6	1.65	4.65
1	-	3.2	-	3.25	H	1.7	4.7	1.75	4.75
2	-	3.3	-	3.35	K	1.8	4.8	1.85	4.85
3	-	3.4	-	3.45	L	1.9	4.9	1.95	4.95
4	-	3.5	-	3.55	M	2.0	5.0	2.05	5.05
5	-	3.6	-	3.65	N	2.1	5.1	2.15	5.15
6	-	3.7	-	3.75	P	2.2	5.2	2.25	5.25
7	-	3.8	-	3.85	R	2.3	5.3	2.35	5.35
8	-	3.9	-	3.95	S	2.4	5.4	2.45	5.45
9	-	4.0	-	4.05	T	2.5	5.5	2.55	5.55
A	-	4.1	-	4.15	U	2.6	5.6	2.65	5.65
B	-	4.2	-	4.25	V	2.7	5.7	2.75	5.75
C	-	4.3	-	4.35	X	2.8	5.8	2.85	5.85
D	-	4.4	-	4.45	Y	2.9	5.9	2.95	5.95
E	-	4.5	-	4.55	Z	3.0	6.0	3.05	6.05

④ represents production lot number

0 to 9, A to Z reverse character of 0 to 9, A to Z repeated (G, I, J, O, Q, W excluded)

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet.
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure of malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
   (e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.
   Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

TOREX SEMICONDUCTOR LTD.