

Tiny Package, 1.3MHz, Step-up DC/DC Converter


General Description

The RT9268 is a compact, 1.3MHz, step-up DC/DC converter with a current mode PWM control loop, providing a stable and efficient operation without external compensation.

The high switching frequency makes RT9268 suitable for ADSL applications providing sufficient output current for variant types of line drivers. This device is available in space-saving SOT-23-6 package.

The output voltage is set with 2 external resistors. Both internal 2A switch and driver for driving external power devices (NMOS or NPN) are provided.

Ordering Information

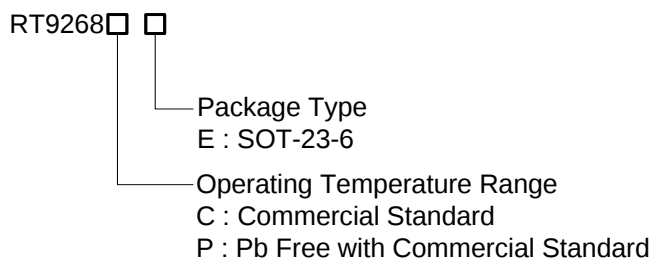

Note :

RichTek Pb-free products are :

- RoHS compliant and compatible with the current requirements of IPC/JEDEC J-STD-020.
- Suitable for use in SnPb or Pb-free soldering processes.
- 100%matte tin (Sn) plating.

Marking Information

For marking information, contact our sales representative directly or through a RichTek distributor located in your area, otherwise visit our website for detail.


Features

- 1.3MHz Switching Frequency
- Below 2V Low Start-up Input Voltage
- Sufficient Supply Capability for Supplying XDSL Line Drivers
- Zero Shutdown Mode Supply Current
- Providing Flexibility for Using Internal and External Power Switches
- Small SOT-23-6 Package
- RoHS Compliant and 100% Lead (Pb)-Free

Applications


- XDSL Line Drivers
- USB Devices
- PCMCIA Cards
- Mini-PCI Cards

Pin Configurations




Note : There is no pin1 indicator on top mark for SOT-23-6 type, and pin 1 will be lower left pin when reading top mark from left to right.

Typical Application Circuit

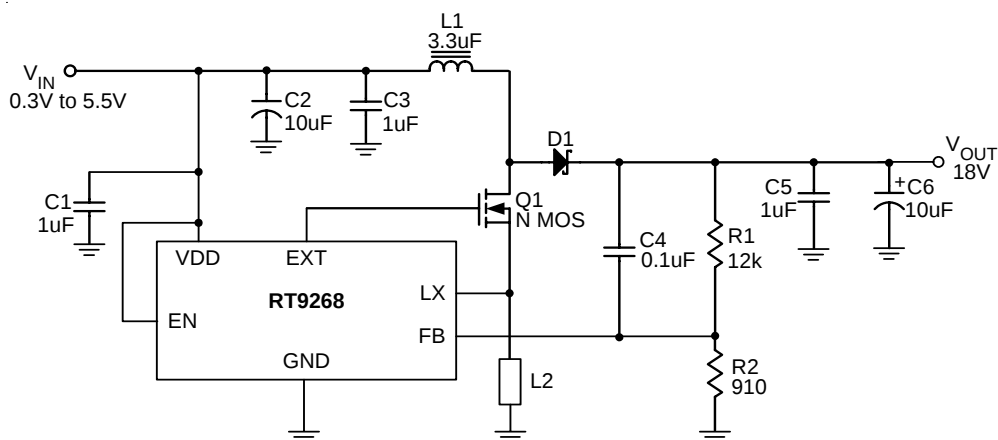

L2 : CL321611T-R22K-S/ YAGEO

Figure 1. RT9268 Application for XDSL 18V Line Drivers

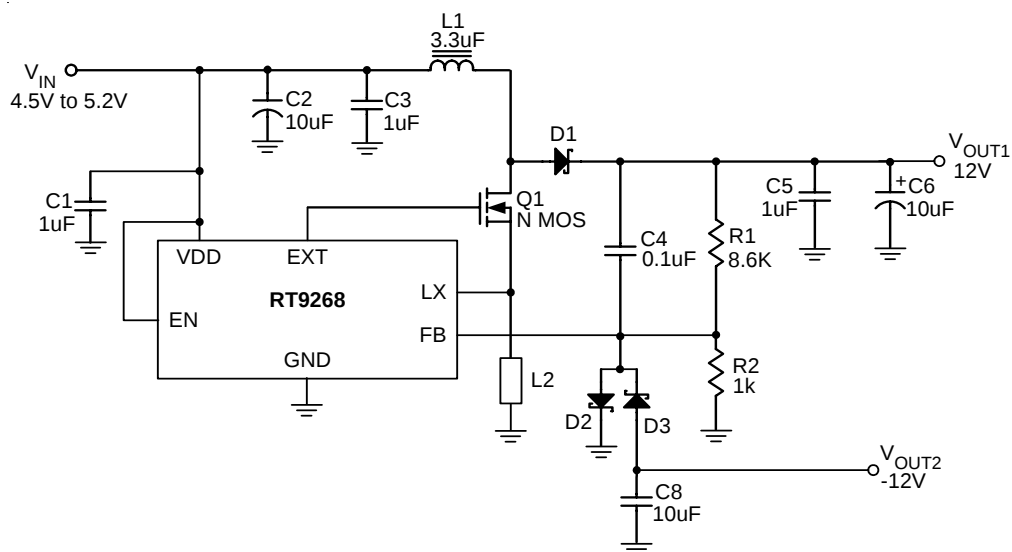


L2 : CL321611T-R22K-S/ YAGEO

Figure 2. RT9268 Application for USB-XDSL $\pm 12V$ Line Drivers

Functional Pin Description

Pin No.	Pin Name	Pin Function
1	EN	Chip Enable (Active High)
2	EXT	Output Pin for Driving External NMOS
3	GND	Ground
4	LX	Pin for Switching
5	VDD	Input Positive Power Pin of RT9268
6	FB	Feedback Input Pin Internal reference voltage for the error amplifier is 1.25V.

Function Block Diagram

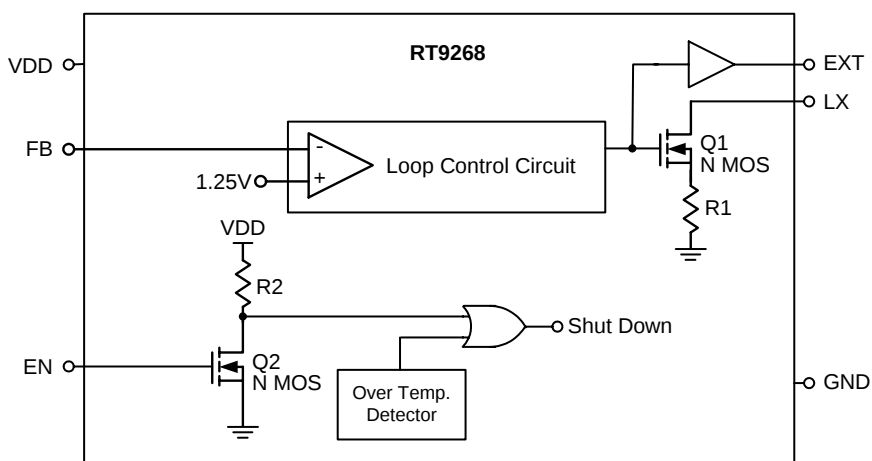

Absolute Maximum Ratings

- Supply Voltage ----- -0.3V to 7V
- LX Pin Switch Voltage ----- -0.3V to ($V_{DD} + 0.8V$)
- Other I/O Pin Voltages ----- -0.3V to ($V_{DD} + 0.3V$)
- LX Pin Switch Current ----- 2.5A
- EXT Pin Driver Current ----- 200mA
- Power Dissipation, P_D @ $T_A = 25^\circ C$
 SOT-23-6 ----- 0.25W
- Package Thermal Resistance
 SOT-23-6, θ_{JA} ----- $250^\circ C/W$
- Operating Junction Temperature ----- $125^\circ C$
- Storage Temperature Range ----- $-65^\circ C$ to $+150^\circ C$







Electrical Characteristics

($V_{IN} = 3.3V$, V_{DD} set to 5V, Load Current = 0, $T_A = 25^\circ C$, unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Start-UP Voltage	V_{ST}	$I_L = 1mA$	--	--	2	V
Operating V_{DD} Range	V_{DD}	V_{DD} pin voltage	2	--	6.5	V
No Load Current I (V_{IN})	$I_{NO\,LOAD}$	$V_{IN} = 3.3V$, $V_{OUT} = 5V$	--	3	--	mA
Switch-off Current I (V_{DD})	I_{SWITCH}	$V_{IN} = 6V$	--	1	--	mA
Shutdown Current I (V_{IN})	I_{OFF}	EN Pin = 0V, $V_{IN} = 6V$	--	0.1	1	μA
Feedback Reference Voltage	V_{REF}		1.225	1.25	1.275	V
Switching Frequency	F_S	$V_{DD} = 5V$	--	1.3	--	MHz
Maximum Duty	D_{MAX}	$V_{DD} = 5V$	--	95	--	%
LX ON Resistance		$V_{DD} = 5V$	--	0.3	--	Ω
Current Limit Setting	I_{LIMIT}	$V_{DD} = 5V$	--	2	--	A
EXT ON Resistance to V_{DD}		$V_{DD} = 5V$	--	5	--	Ω
EXT ON Resistance to GND		$V_{DD} = 5V$	--	5	--	Ω
Line Regulation	ΔV_{LINE}	$V_{IN} = 2 \sim 4V$, $I_L = 1mA$	--	10	--	mV/V
Load Regulation	ΔV_{LOAD}	$V_{IN} = 3.3V$, $I_L = 1 \sim 100mA$	--	0.25	--	mV/mA
EN Pin Trip Level		$V_{DD} = 5V$	0.4	0.8	1.2	V
Temperature Stability for V_{out}	T_S	Guaranteed by Design	--	50	--	ppm/ $^\circ C$
Thermal Shutdown	T_{SD}	Guaranteed by Design	--	165	--	$^\circ C$
Thermal Shutdown Hysterises	ΔT_{SD}	Guaranteed by Design	--	10	--	$^\circ C$

* **Note.** The EN pin shall be tied to V_{DD} pin and inhibit to act the ON/OFF state whenever the V_{DD} pin voltage may reach to 5.5V or above.

Typical Operating Characteristics

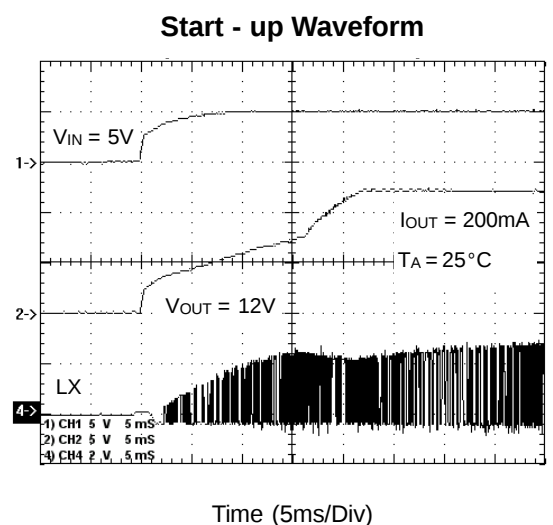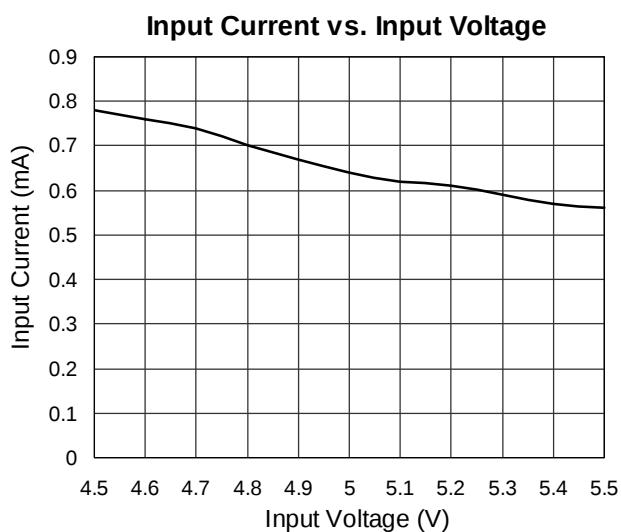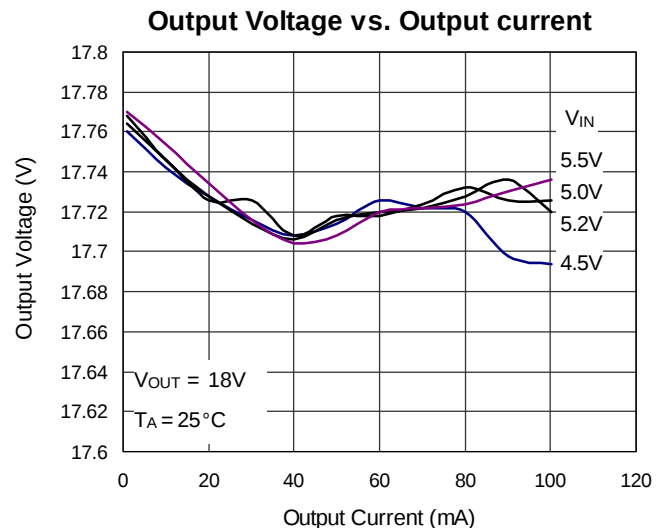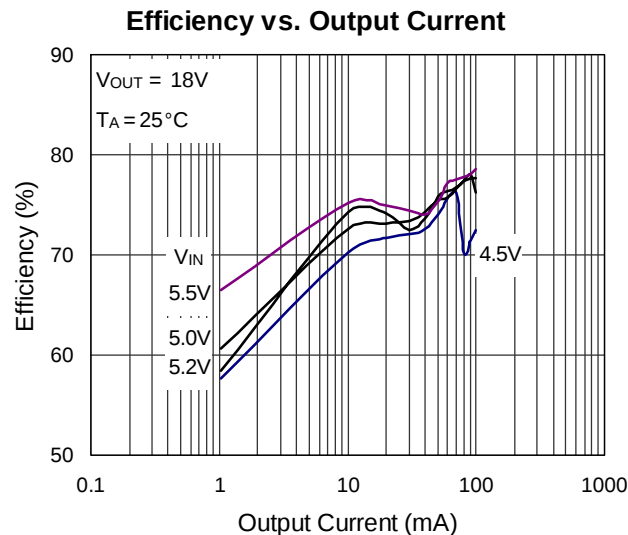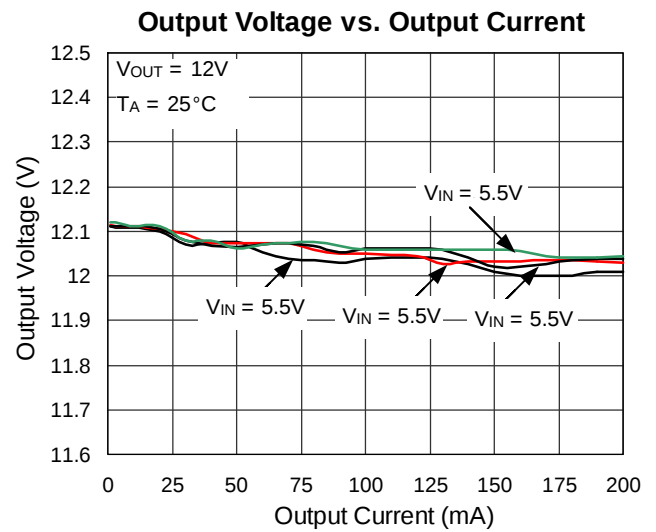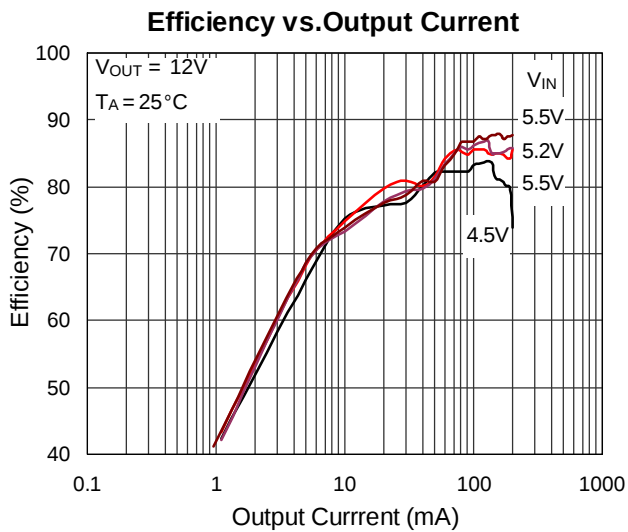

Outline Dimension

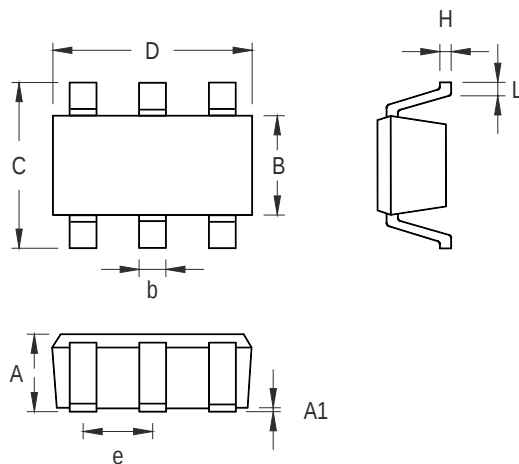

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.889	1.295	0.031	0.051
A1	0.000	0.152	0.000	0.006
B	1.397	1.803	0.055	0.071
b	0.250	0.560	0.010	0.022
C	2.591	2.997	0.102	0.118
D	2.692	3.099	0.106	0.122
e	0.838	1.041	0.033	0.041
H	0.080	0.254	0.003	0.010
L	0.300	0.610	0.012	0.024

SOT-23-6 Surface Mount Package

RICHTEK TECHNOLOGY CORP.

Headquarter

5F, No. 20, Taiyuen Street, Chupei City

Hsinchu, Taiwan, R.O.C.

Tel: (8863)5526789 Fax: (8863)5526611

RICHTEK TECHNOLOGY CORP.

Taipei Office (Marketing)

8F-1, No. 137, Lane 235, Paochiao Road, Hsintien City

Taipei County, Taiwan, R.O.C.

Tel: (8862)89191466 Fax: (8862)89191465

Email: marketing@richtek.com