ALPHA & OMEGA SEMICONDUCTOR

AO4712

30V N-Channel MOSFET

SRFET™

General Description

SRFET™ AO4712 uses advanced trench technology with a monolithically integrated Schottky diode to provide excellent $R_{DS(ON)}$,and low gate charge. This device is suitable for use as a low side FET in SMPS, load switching and general purpose applications.


Product Summary


V_{DS}	30V
I_D (at V_{GS}=10V)	13A
$R_{DS(ON)}$ (at V_{GS}=10V)	< 11mΩ
$R_{DS(ON)}$ (at V_{GS} = 4.5V)	< 14mΩ

100% UIS Tested
100% R_g Tested

Green Product

SOIC-8

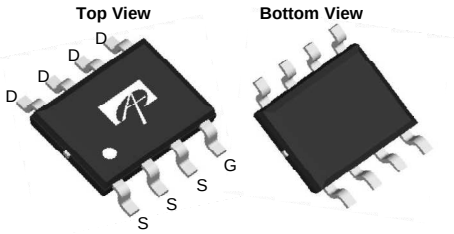



SRFET™
Soft **R**ecovery MOS**FET**:
Integrated Schottky Diode

Absolute Maximum Ratings T_A=25℃ unless otherwise noted

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	30	V
Gate-Source Voltage		V_{GS}	±12	V
Continuous Drain Current	T_A=25℃	I_D	13	A
	T_A=70℃		10	
Pulsed Drain Current [C]		I_{DM}	68	
Avalanche Current [C]		I_{AS}, I_{AR}	15	A
Avalanche energy L=0.1mH [C]		E_{AS}, E_{AR}	11	mJ
Power Dissipation [B]	T_A=25℃	P_D	3.1	W
	T_A=70℃		2	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150	℃

Thermal Characteristics

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	32	40	℃/W
Maximum Junction-to-Ambient [A D]	Steady-State		60	75	℃/W
Maximum Junction-to-Lead	Steady-State	$R_{\theta JL}$	17	24	℃/W

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=1mA, V_{GS}=0V	30			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=30V, V_{GS}=0V			0.5	mA
		T_J=125°C			100	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}= ±12V			100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=250µA	1.1	1.65	2.1	V
$I_{D(ON)}$	On state drain current	V_{GS}=10V, V_{DS}=5V	68			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=13A		9	11	mΩ
		T_J=125°C		13	16	
		V_{GS}=4.5V, I_D=11A		10.7	14	mΩ
g_{FS}	Forward Transconductance	V_{DS}=5V, I_D=13A		80		S
V_{SD}	Diode Forward Voltage	I_S=1A,V_{GS}=0V		0.4	0.7	V
I_S	Maximum Body-Diode Continuous Current				5	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=15V, f=1MHz	930	1170	1400	pF
C_{oss}	Output Capacitance		90	128	170	pF
C_{rss}	Reverse Transfer Capacitance		45	89	125	pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz	0.7	1.4	2.1	Ω
SWITCHING PARAMETERS						
Q_g(10V)	Total Gate Charge	V_{GS}=10V, V_{DS}=15V, I_D=13A	16	20	24	nC
Q_g(4.5V)	Total Gate Charge		7	8.7	10.5	nC
Q_{gs}	Gate Source Charge			3.2		nC
Q_{gd}	Gate Drain Charge			3		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=15V, R_L=1.2Ω, R_{GEN}=3Ω		6		ns
t_r	Turn-On Rise Time			2.4		ns
$t_{D(off)}$	Turn-Off DelayTime			23		ns
t_f	Turn-Off Fall Time			4		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=13A, dI/dt=500A/µs	5.5	7	8.5	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=13A, dI/dt=500A/µs	5	6.5	8	nC

A. The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A =25° C. The value in any given application depends on the user's specific board design.
B. The power dissipation P_D is based on $T_{J(MAX)}$=150° C, using ≤ 10s junction-to-ambient thermal resistance.
C. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=150° C. Ratings are based on low frequency and duty cycles to keep initialT_J=25° C.
D. The $R_{\theta JA}$ is the sum of the thermal impedance from junction to lead $R_{\theta JL}$ and lead to ambient.
E. The static characteristics in Figures 1 to 6 are obtained using <300µs pulses, duty cycle 0.5% max.
F. These curves are based on the junction-to-ambient thermal impedance which is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, assuming a maximum junction temperature of $T_{J(MAX)}$=150° C. The SOA curve provides a single pulse rating.

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

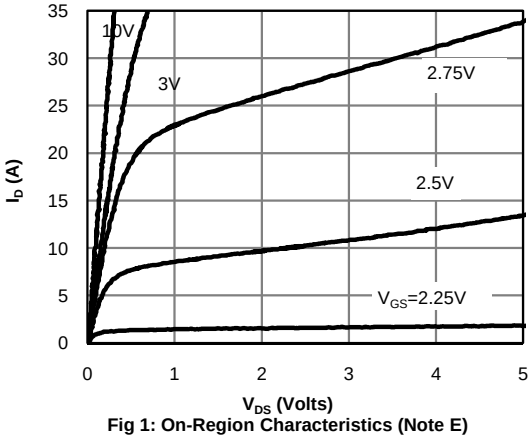


Fig 1: On-Region Characteristics (Note E)

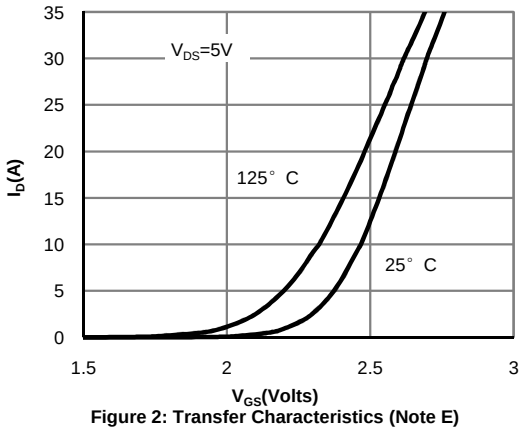


Figure 2: Transfer Characteristics (Note E)

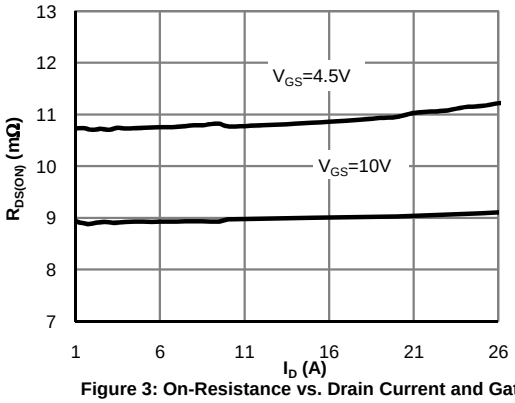


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

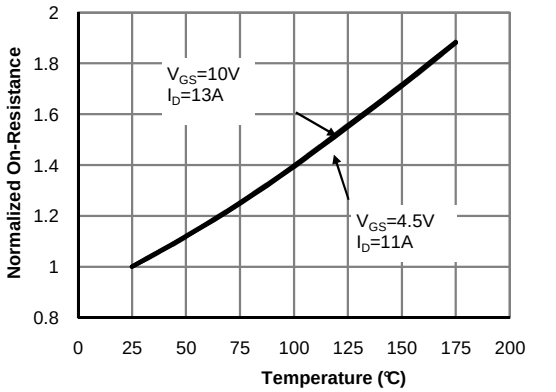


Figure 4: On-Resistance vs. Junction Temperature (Note E)

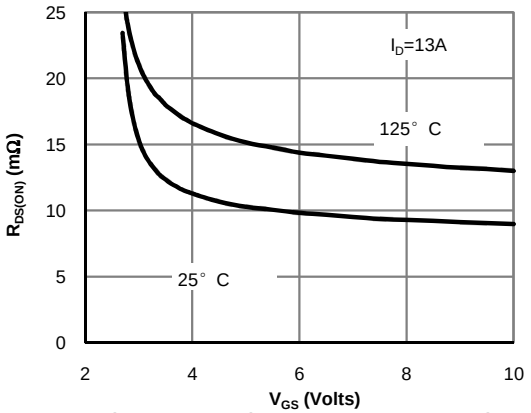


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

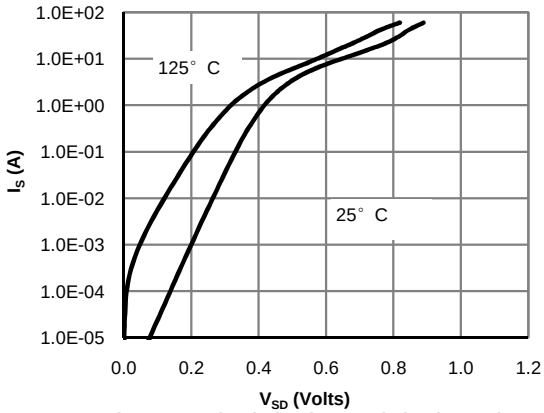


Figure 6: Body-Diode Characteristics (Note E)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

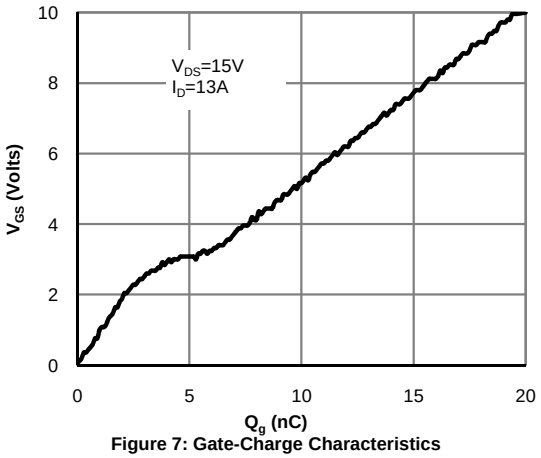


Figure 7: Gate-Charge Characteristics

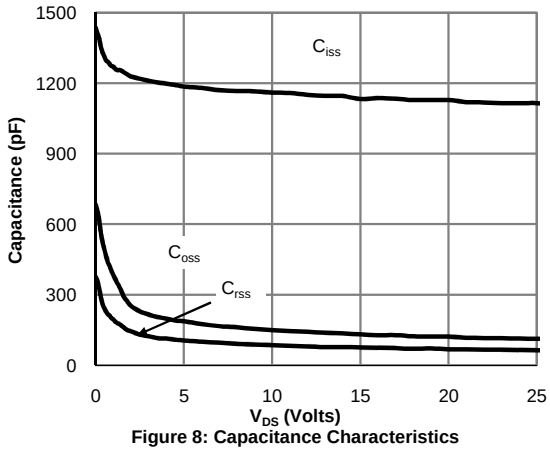


Figure 8: Capacitance Characteristics

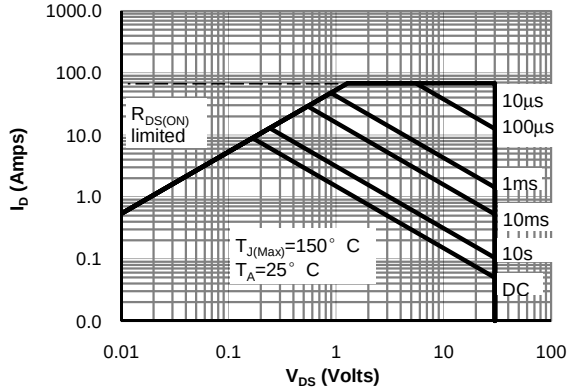


Figure 10: Maximum Forward Biased Safe Operating Area (Note F)

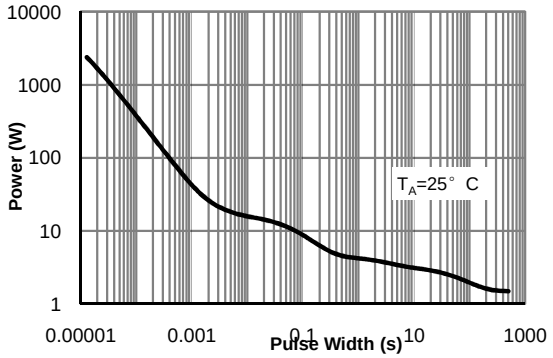


Figure 11: Single Pulse Power Rating Junction-to-Ambient (Note F)

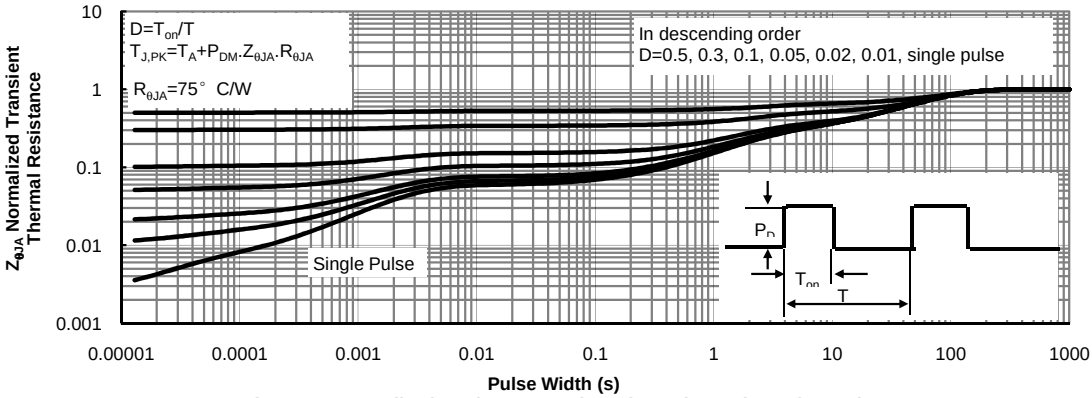


Figure 12: Normalized Maximum Transient Thermal Impedance (Note F)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

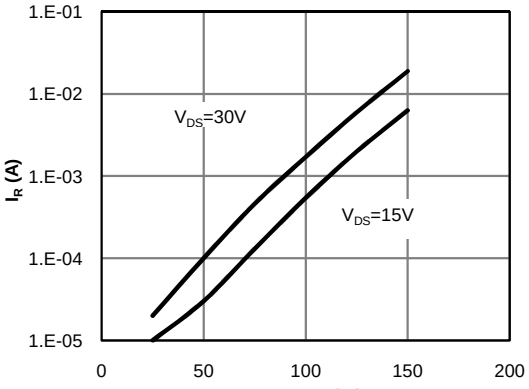


Figure 13: Diode Reverse Leakage Current vs. Junction Temperature

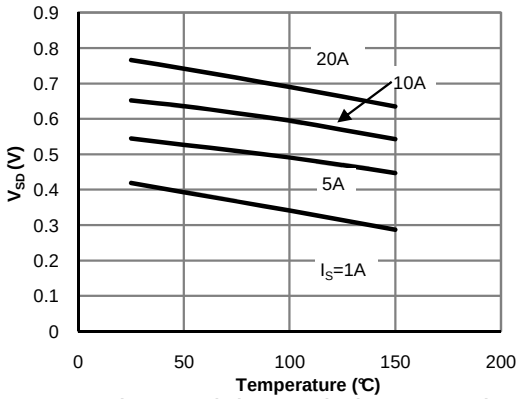


Figure 14: Diode Forward voltage vs. Junction Temperature

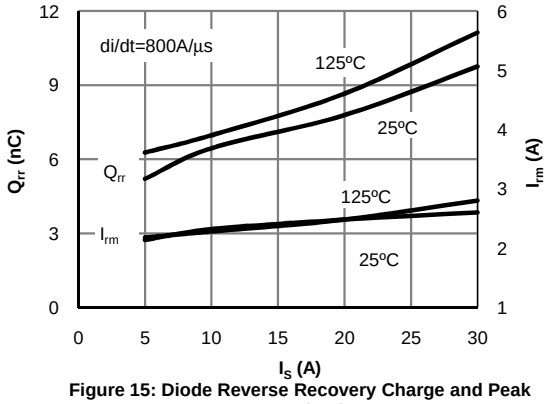


Figure 15: Diode Reverse Recovery Charge and Peak Current vs. Conduction Current

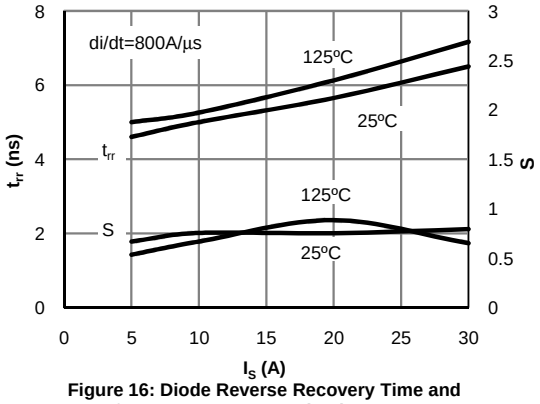


Figure 16: Diode Reverse Recovery Time and Softness Factor vs. Conduction Current

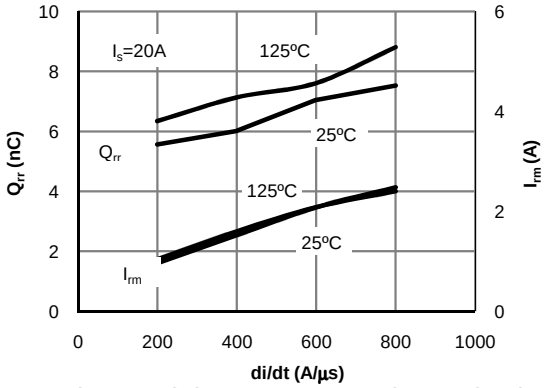


Figure 17: Diode Reverse Recovery Charge and Peak Current vs. di/dt



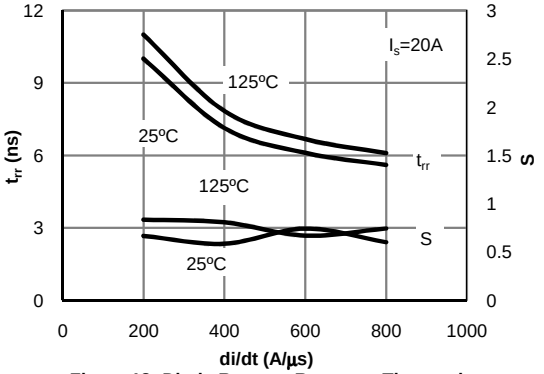


Figure 18: Diode Reverse Recovery Time and Softness Factor vs. di/dt


Gate Charge Test Circuit & Waveform

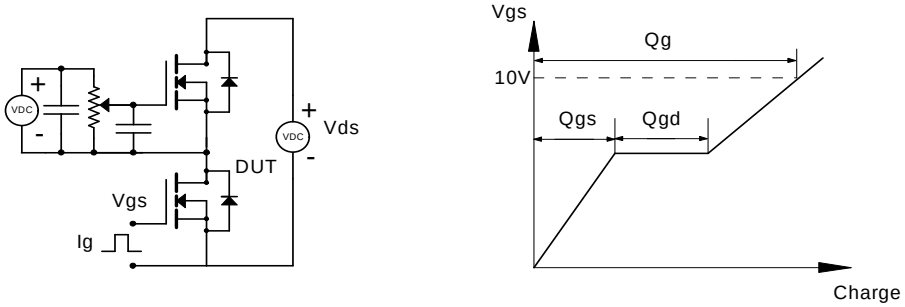


Resistive Switching Test Circuit & Waveforms

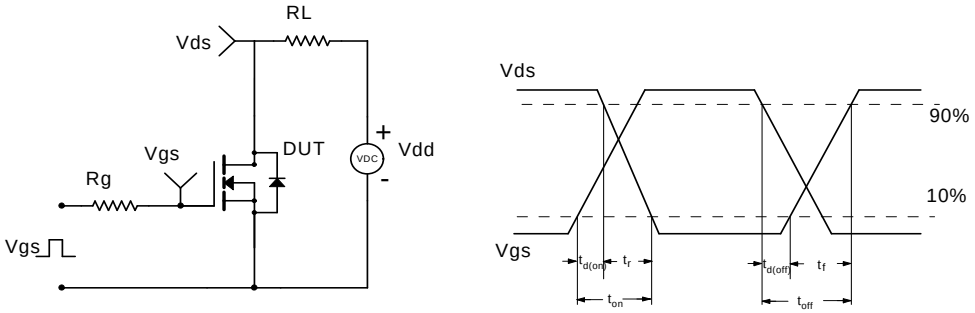

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

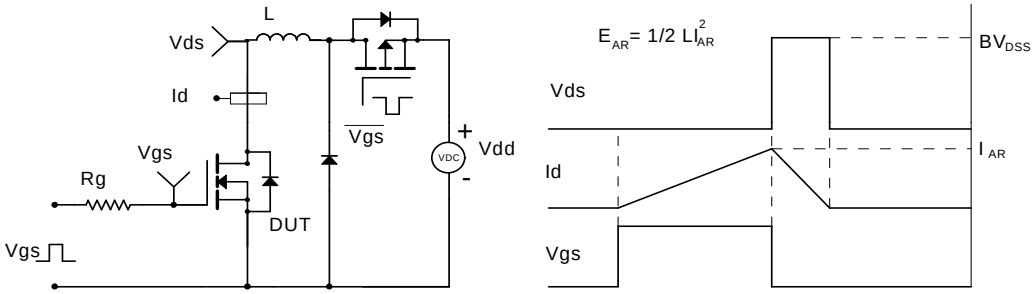


Diode Recovery Test Circuit & Waveforms

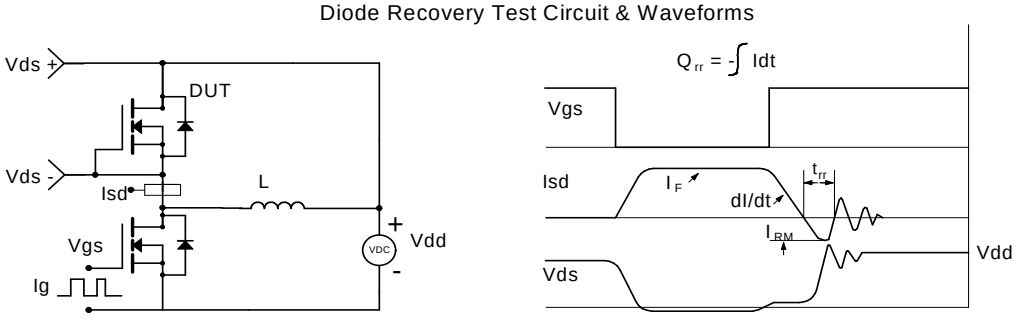

ALPHA & OMEGA SEMICONDUCTOR

Document No.	PD-00486
Version	B
Title	AO4712 Marking Description

SO-8 PACKAGE MARKING DESCRIPTION



Green product

NOTE:
LOGO - AOS Logo
4712 - Part number code
F - Fab code
A - Assembly location code
Y - Year code
W - Week code
L&T - Assembly lot code

PART NO.	DESCRIPTION	CODE
AO4712	Green product	4712
AO4712L	Green product	4712