-100mA / -50V Digital transistors (with built-in resistors)


DTA123JEB

●Applications
Inverter, Interface, Driver

●Features
1) Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit).
2) The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
3) Only the on/off conditions need to be set for operation, making the device design easy.

●Dimensions (Unit : mm)

EMT3F

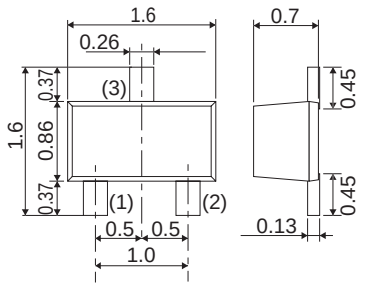


(1) IN
(2) GND
(3) OUT

Each lead has same dimensions

Abbreviated symbol : E32

●Structure
PNP silicon epitaxial planar transistor type
(Resistor built-in)

●Equivalent circuit

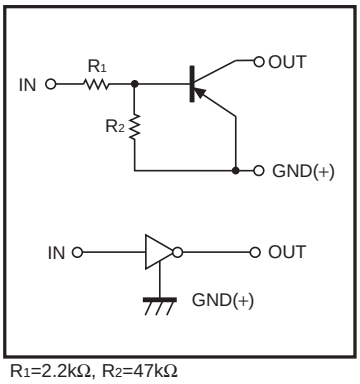

R_1=2.2kΩ, R_2=47kΩ

●Packaging specifications

Part No.	Package	EMT3F
	Packaging type	Taping
	Code	TL
	Basic ordering unit (pieces)	3000
DTA123JEB		○

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	V_{CC}	−50	V
Input voltage	V_{IN}	−12 to +5	V
Collector current	Ic(max) *1	−100	mA
Output current	Io	−100	mA
Power dissipation	P_D *2	150	mW
Junction temperature	Tj	150	°C
Storage temperature	Tstg	−55 to +150	°C

*1 Characteristics of built-in transistor
*2 Each terminal mounted on a recommended land

© 2009 ROHM Co., Ltd. All rights reserved.

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	$V_{I(off)}$	–	–	–500	mV	V_{CC}=–5V, I_O=–100µA
	$V_{I(on)}$	–1.1	–	–	V	V_O=–0.3V, I_O=–5mA
Output voltage	$V_{O(on)}$	–	–100	–300	mV	I_O/I_I=–5mA/–0.25mA
Input current	I_I	–	–	–3.6	mA	V_I=–5V
Output current	$I_{O(off)}$	–	–	–500	nA	V_{CC}=–50V, V_I=0V
DC current gain	G_I	80	–	–	–	V_O=–5V, I_O=–10mA
Transition frequency	f_T *	–	250	–	MHz	V_{CE}=–10V, I_E=5mA, f=100MHz
Input resistance	R_1	1.54	2.2	2.86	kΩ	–
Resistance ratio	R_2/R_1	17	21	26	–	–

* Characteristics of built-in transistor

●Electrical characteristic curves

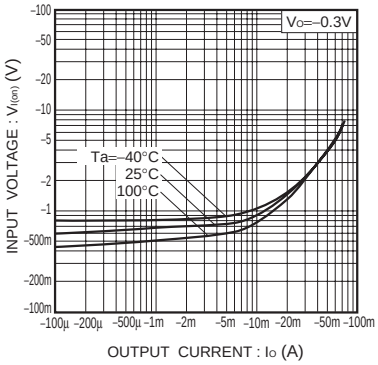


Fig.1 Input voltage vs. output current (ON characteristics)

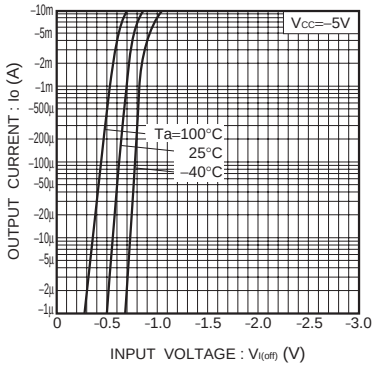


Fig.2 Output current vs. input voltage (OFF characteristics)

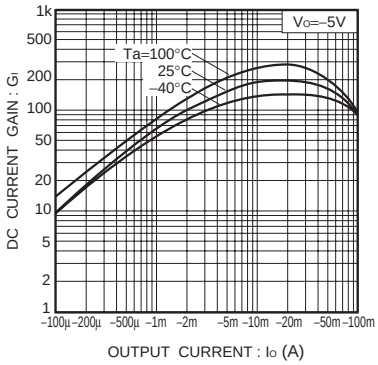


Fig.3 DC current gain vs. output current

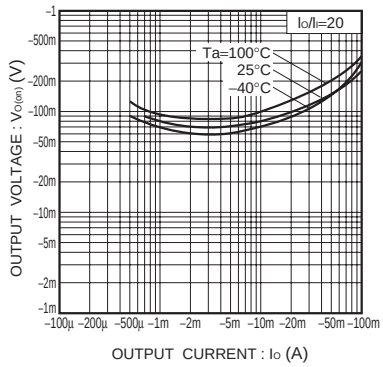


Fig.4 Output voltage vs. output current

© 2009 ROHM Co., Ltd. All rights reserved.