High-gain Amplifier Transistor (32V , 0.3A)

2SD1383K

●Features

1) Darlington connection for high DC current gain.
2) Built-in 4kΩ resistor between base and emitter.
3) Complements the 2SB852K.


●Packaging specifications

Type	2SD1383K
Package	SMT3
h_{FE}	B
Marking	W∗
Code	T146
Basic ordering unit (pieces)	3000

∗ Denotes h_{FE}

●Dimensions (Unit : mm)


2SD1383K



(1)Emitter
(2)Base
(3)Collector

Each lead has same dimensions

●Circuit diagram



●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CBO}	40	V
Collector-emitter voltage	V_{CES}	32	V ∗1
Emitter-base voltage	V_{EBO}	6	V
Collector current	I_C	0.3	A (DC)
		1.5	A (Pulse) ∗2
Collector power dissipation	P_C	0.2	W
Junction temperature	Tj	150	°C
Storage temperature	Tstg	–55 to +150	°C

∗1 R_{BE}=0Ω
∗2 Single pulse Pw=10ms

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV_{CBO}	40	–	–	V	I_C=100μA
Collector-emitter breakdown voltage	BV_{CES}	32	–	–	V	I_C= –1mA , R_{BE}=0Ω
Emitter-base breakdown voltage	BV_{EBO}	6	–	–	V	I_E=100μA
Collector cutoff current	I_{CBO}	–	–	1	μA	V_{CB}=24V
Emitter cutoff current	I_{EBO}	–	–	1	μA	V_{EB}=4.5V
DC current transfer ratio	h_{FE}	5000	–	–	–	V_{CE}=5V, I_C=0.1A
Collector-emitter saturation voltage	$V_{CE(sat)}$	–	–	1.5	V	I_C=200mA, I_B=0.4mA ∗1
Transition frequency	f_T	–	250	–	MHz	V_{CE}=5V, I_E= –10mA, f=100MHz ∗2
Output capacitance	Cob	–	3	–	pF	V_{CB}=10V, I_E=0A, f=1MHz

∗1 Measured using pulse current.
∗2 Transition frequency of the device.

●Electrical characteristic curves

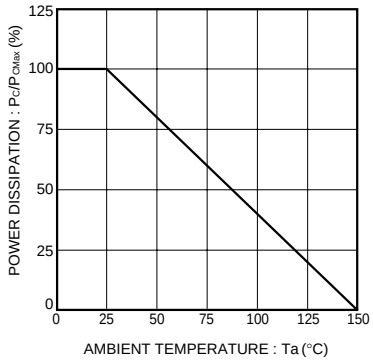


Fig.1 Power dissipation curves

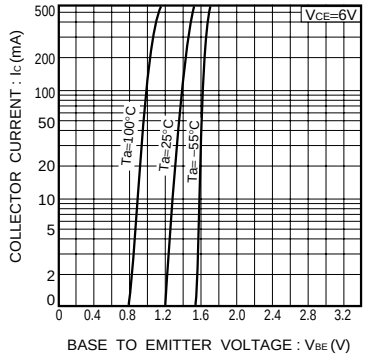


Fig.2 Ground emitter propagation characteristisc

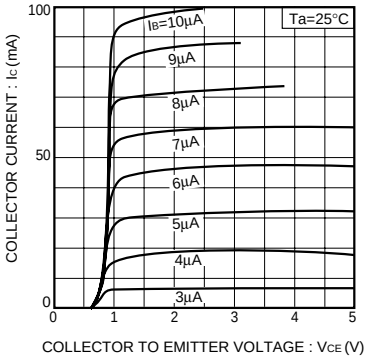


Fig.3 Ground emitter output characteristics

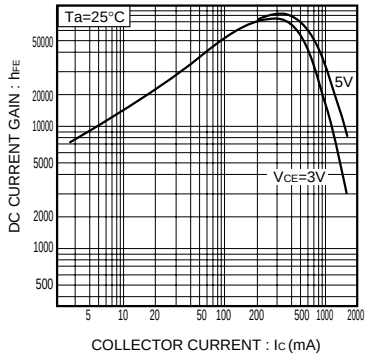


Fig.4 DC current gain vs. collector current (I)

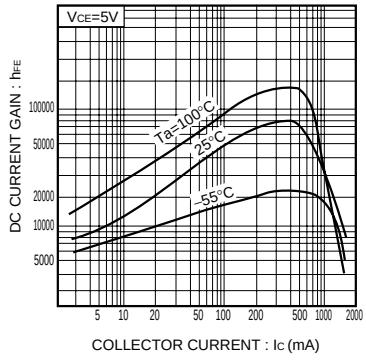


Fig.5 DC current gain vs. collector current (II)

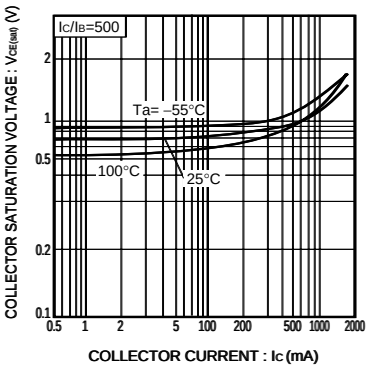


Fig.6 Collector-emitter saturation voltage vs. collector current

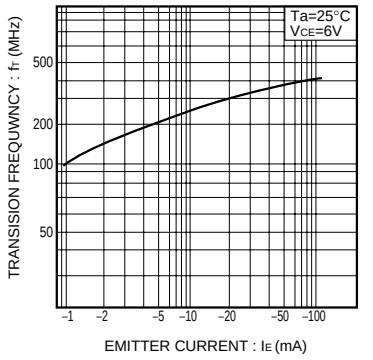


Fig.7 Gain bandwidth product vs. emitter current

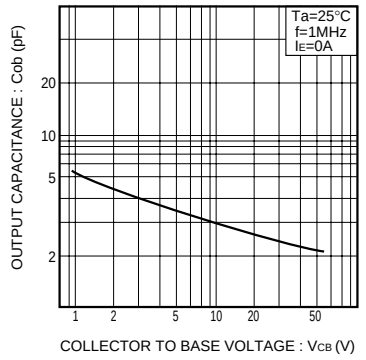


Fig.8 Collector output capacitance vs. collector-base voltage

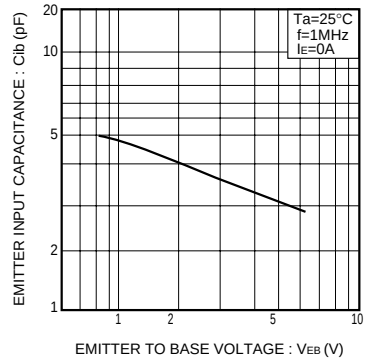


Fig.9 Emitter input capacitance vs. emitter-base voltage

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).
Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.
It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2008 ROHM CO.,LTD.

ROHM CO., LTD. 21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan
TEL : +81-75-311-2121
FAX : +81-75-315-0172