ALPHA & OMEGA SEMICONDUCTOR

AON7410

30V N-Channel MOSFET

General Description

The AON7410 uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. This device is suitable for use in DC - DC converters and Load Switch applications.

RoHS and Halogen-Free Compliant

Features


V_{DS} (V) = 30V
I_D = 24A (V_{GS} = 10V)
$R_{DS(ON)}$ < 20mΩ (V_{GS} = 10V)
$R_{DS(ON)}$ < 26mΩ (V_{GS} = 4.5V)

100% UIS Tested
100% Rg Tested


Green Product


DFN 3x3 EP

Top View Bottom View

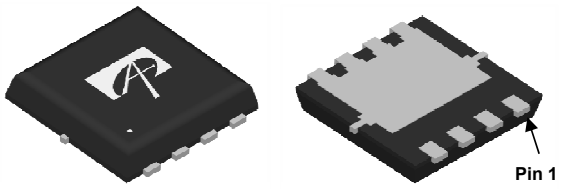

Top View





Orderable Part Number	Package Type	Form	Minimum Order Quantity
AON7410	DFN 3x3 EP	Tape & Reel	5000

Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	30	V
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current [B]	T_C=25°C	I_D	24	A
	T_C=100°C		15	
Pulsed Drain Current [C]		I_{DM}	50	
Continuous Drain Current [A]	T_A=25°C	I_{DSM}	9.5	
	T_A=70°C		7.7	
Avalanche Current [C]		I_{AS}, I_{AR}	17	A
Repetitive avalanche energy L=0.1mH [C]		E_{AS}, E_{AR}	14	mJ
Power Dissipation [B]	T_C=25°C	P_D	20	W
	T_C=100°C		8.3	
Power Dissipation [A]	T_A=25°C	P_{DSM}	3.1	
	T_A=70°C		2	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 150	°C

Thermal Characteristics

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	30	40	°C/W
Maximum Junction-to-Ambient [A]	Steady-State		60	75	°C/W
Maximum Junction-to-Case [B]	Steady-State	$R_{\theta JC}$	5	6	°C/W

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250µA, V_{GS}=0V	30			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=30V, V_{GS}=0V			1	µA
		T_J=55°C			5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}= ±20V			±100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=250µA	1.4	1.8	2.5	V
$I_{D(ON)}$	On state drain current	V_{GS}=10V, V_{DS}=5V	50			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=8A		16	20	mΩ
		T_J=125°C		24	29	
		V_{GS}=4.5V, I_D=7A		21	26	
g_{FS}	Forward Transconductance	V_{DS}=5V, I_D=8A		30		S
V_{SD}	Diode Forward Voltage	I_S=1A,V_{GS}=0V		0.75	1	V
I_S	Maximum Body-Diode Continuous Current				20	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=15V, f=1MHz	440	550	660	pF
C_{oss}	Output Capacitance		77	110	143	pF
C_{rss}	Reverse Transfer Capacitance		33	55	77	pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz	3	4	4.9	Ω
SWITCHING PARAMETERS						
Q_g (10V)	Total Gate Charge	V_{GS}=10V, V_{DS}=15V, I_D=8A	7.8	9.8	12	nC
Q_g (4.5V)	Total Gate Charge		3.6	4.6	5.5	nC
Q_{gs}	Gate Source Charge		1.4	1.8	2.2	nC
Q_{gd}	Gate Drain Charge		1.3	2.2	3	nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=15V, R_L=2Ω, R_{GEN}=3Ω		5		ns
t_r	Turn-On Rise Time			3.2		ns
$t_{D(off)}$	Turn-Off DelayTime			24		ns
t_f	Turn-Off Fall Time			6		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=8A, dI/dt=500A/µs	7	9	11	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=8A, dI/dt=500A/µs	12	15	18	nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A =25° C. The Power dissipation P_{DSM} is based on $R_{\theta JA}$ t ≤ 10s value and the maximum allowed junction temperature of 150° C. The value in any given application depends on the user's specific board design, and the maximum temperature of 150° C may be used if the PCB allows it.
B. The power dissipation P_D is based on $T_{J(MAX)}$=150° C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.
C: Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=150° C.
D. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to case $R_{\theta JC}$ and case to ambient.
E. The static characteristics in Figures 1 to 6 are obtained using <300ms pulses, duty cycle 0.5% max.
F. These curves are based on the junction-to-case thermal impedence which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(MAX)}$=150° C.
G. The maximum current rating is limited by bond-wires.
H. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with T_A=25° C. The SOA curve provides a single pulse rating.
Rev12: Jul-2011

COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

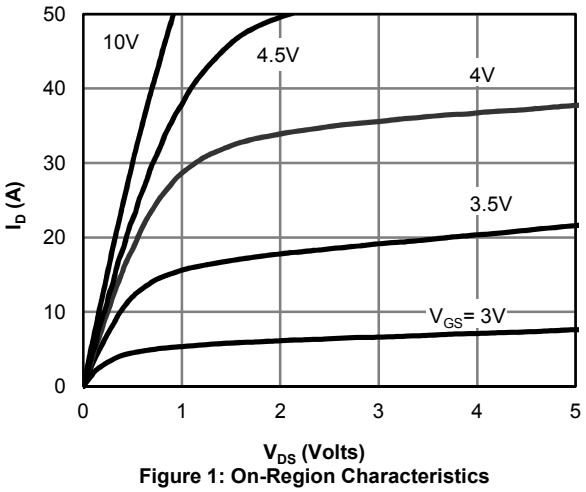


Figure 1: On-Region Characteristics

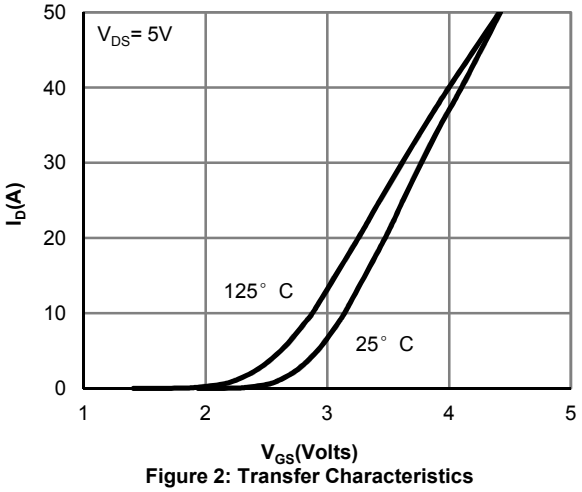


Figure 2: Transfer Characteristics

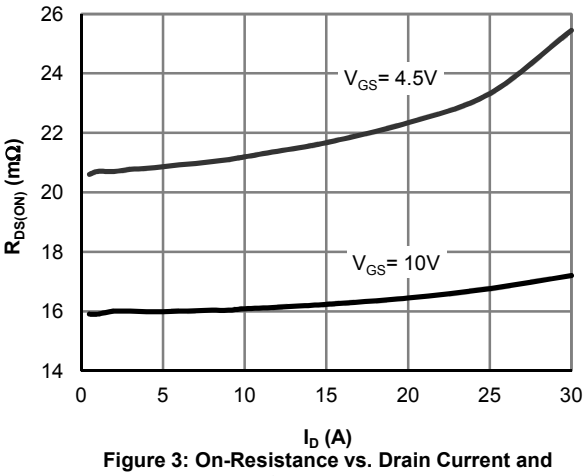


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

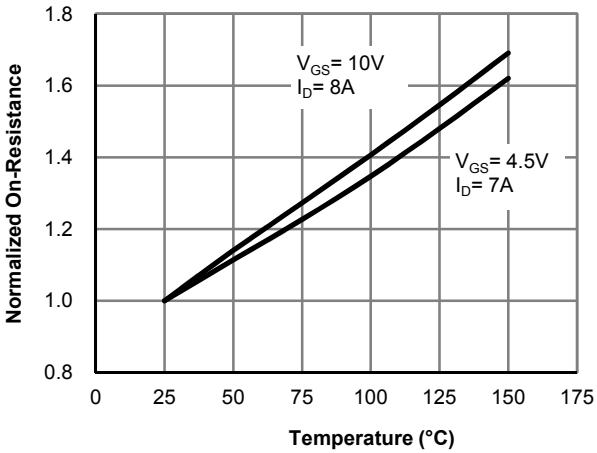


Figure 4: On-Resistance vs. Junction Temperature

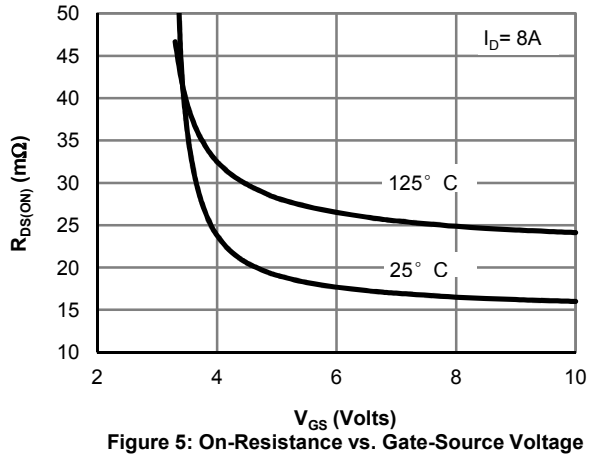


Figure 5: On-Resistance vs. Gate-Source Voltage

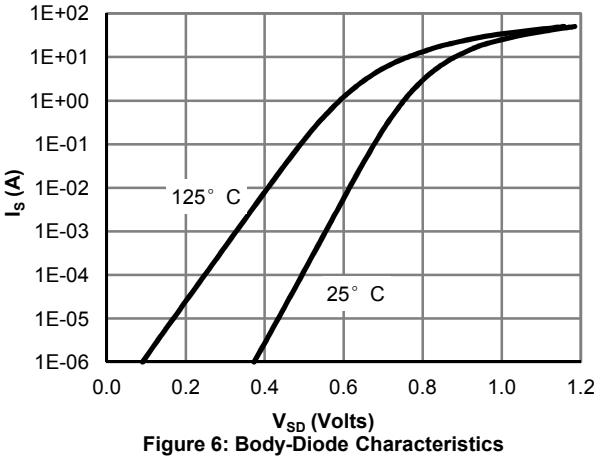


Figure 6: Body-Diode Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTER

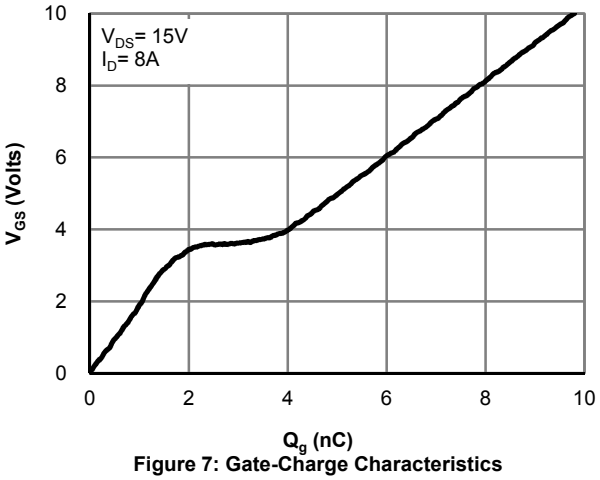


Figure 7: Gate-Charge Characteristics

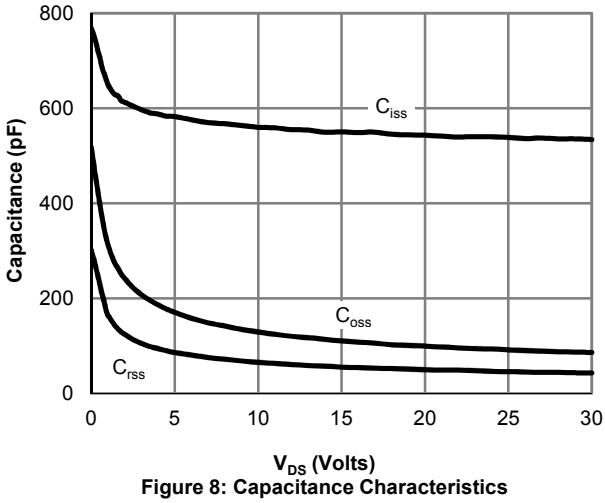


Figure 8: Capacitance Characteristics

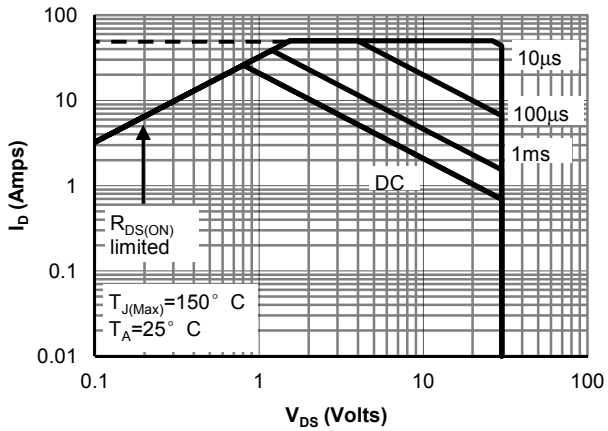


Figure 9: Maximum Forward Biased Safe Operating Area (Note H)

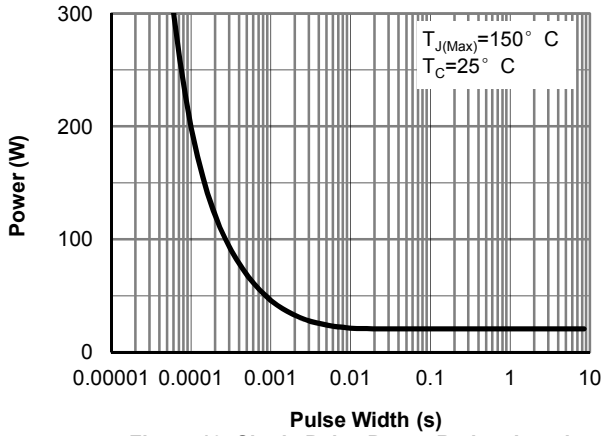


Figure 10: Single Pulse Power Rating Junction-to-Case (Note F)

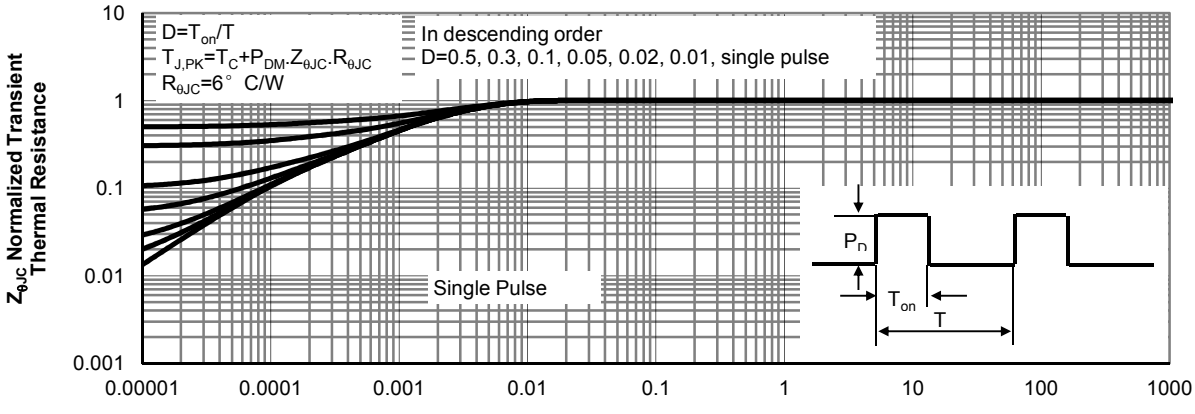


Figure 11: Normalized Maximum Transient Thermal Impedance(Note F)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

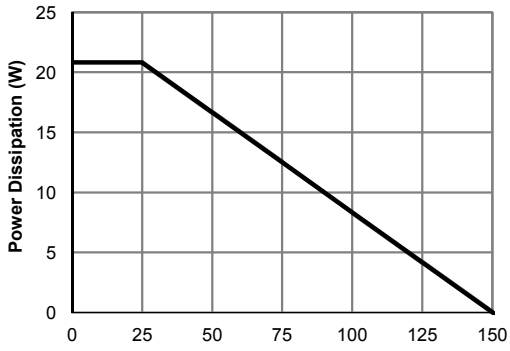


Figure 12: Power De-rating (Note F)

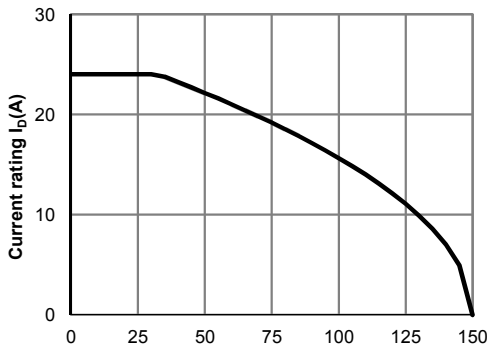


Figure 13: Current De-rating (Note F)

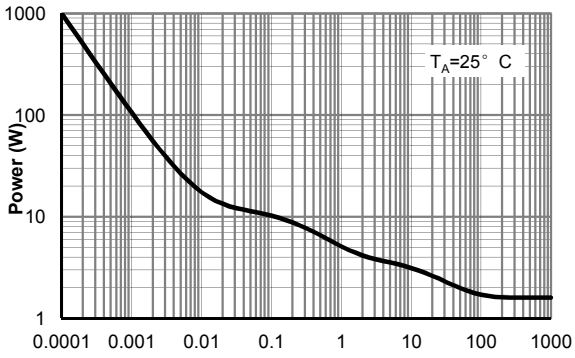


Figure 14: Single Pulse Power Rating Junction-to-Ambient (Note H)



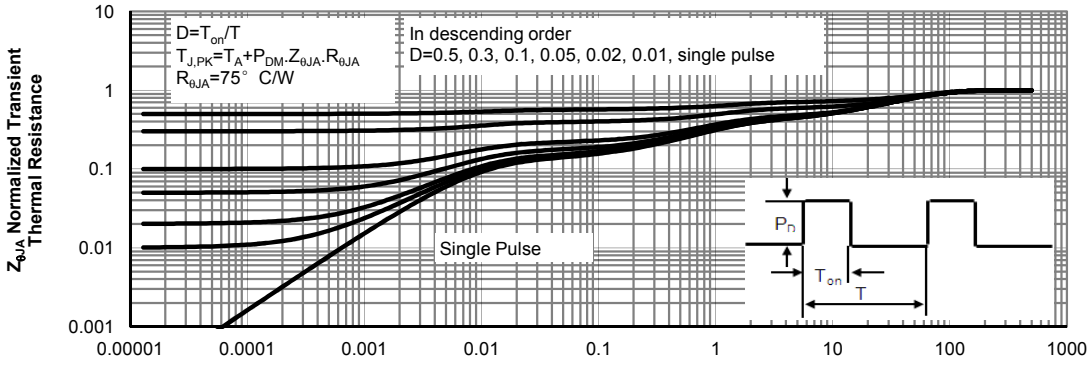


Figure 15: Normalized Maximum Transient Thermal Impedance(Note H)


Gate Charge Test Circuit & Waveform

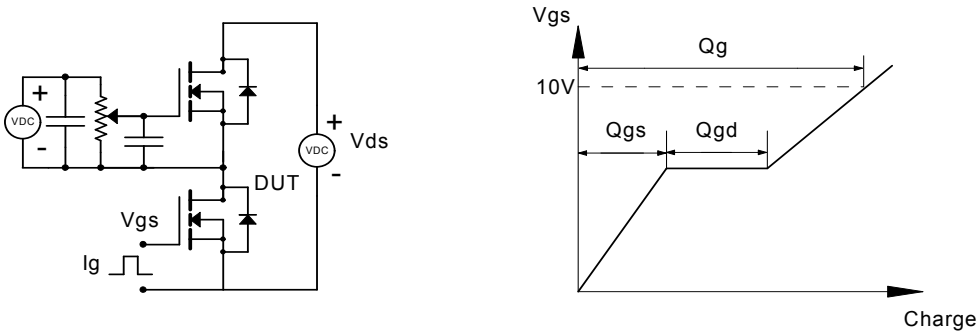


Resistive Switching Test Circuit & Waveforms

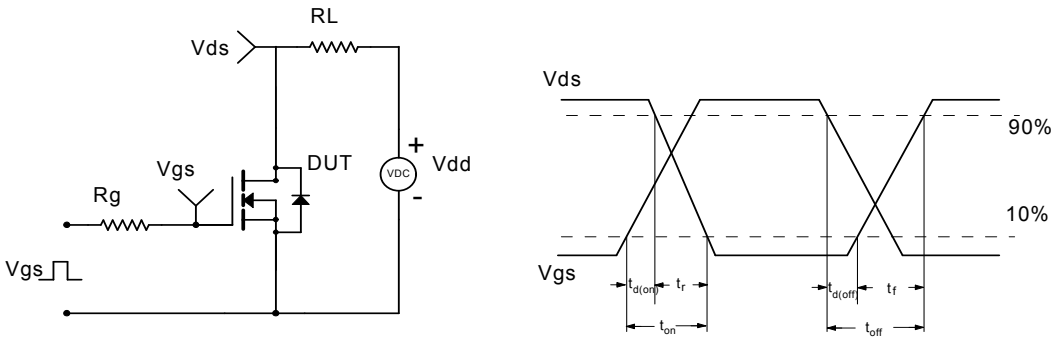

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

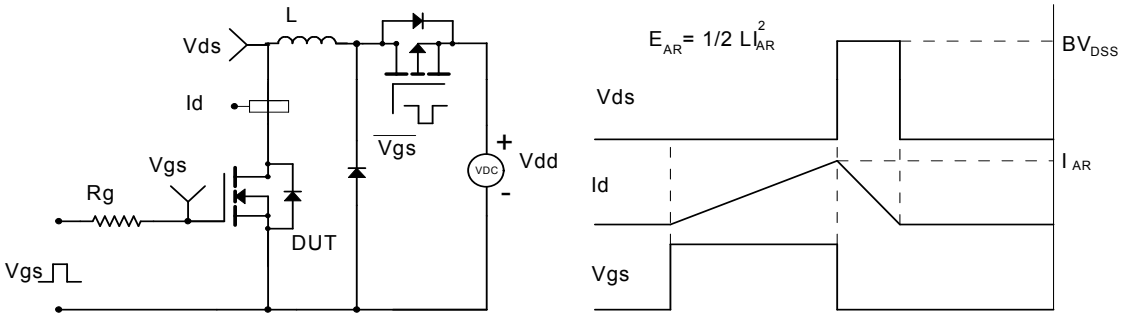


Diode Recovery Test Circuit & Waveforms

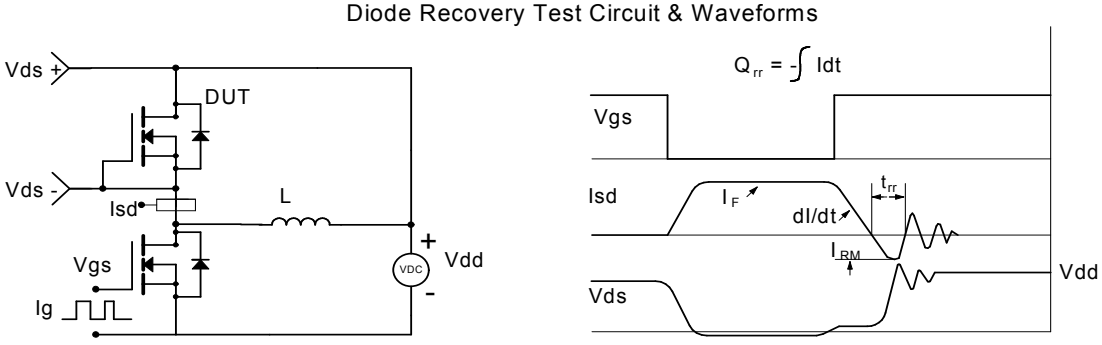

ALPHA & OMEGA SEMICONDUCTOR

Document No.	PD-00853
Version	B
Title	AON7410 Marking Description

DFN3X3 PACKAGE MARKING DESCRIPTION



Green product

NOTE:
LOGO - AOS Logo
7410 - Part number code
F - Fab code
A - Assembly location code
Y - Year code
W - Week code
L&T - Assembly lot code

PART NO.	DESCRIPTION	CODE
AON7410	Green product	7410
AON7410L	Green product	7410