2A / 30V Bipolar transistor

2SD2679


●Applications
Low frequency amplification, driver

●Features
1) Collector current is high.
2) Low collector-emitter saturation voltage.
($V_{CE(sat)} \leq 350mV$ at $I_C = 1.5A$, $I_B = 75mA$)

●Structure
NPN epitaxial planar silicon transistor

●Dimensions (Unit : mm)

MPT3



(1)Base
(2)Collector
(3)Emitter

Abbreviated symbol : XZ

●Absolute maximum ratings (Ta=25°C)

Parameter		Symbol	Limits	Unit
Collector-base voltage		V_{CBO}	30	V
Collector-emitter voltage		V_{CEO}	30	V
Emitter-base voltage		V_{EBO}	6	V
Collector current	DC	I_C	2	A
	Pulse	I_{CP}	4 ∗1	
Power dissipation		P_C	0.5 ∗2	W
			2 ∗3	
Junction temperature		tj	150	°C
Storage temperature		tstg	−55 to +150	°C

∗1 Pw=1ms, single pulse.
∗2 Each terminal mounted on a recommended land.
∗3 Mounted on a 40×40×0.7mm ceramic board.

●Packaging specifications

	Package	MPT3
	Packaging type	Taping
	Code	T100
Part No.	Basic ordering unit (pieces)	1000
2SD2679		○

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-emitter breakdown voltage	BV_{CEO}	30	–	–	V	I_C=1mA
Collector-base breakdown voltage	BV_{CBO}	30	–	–		I_C=10μA
Emitter-base breakdown voltage	BV_{EBO}	6	–	–		I_E=10μA
Collector cut-off current	I_{CBO}	–	–	100	nA	V_{CB}=30V
Emitter cut-off current	I_{EBO}	–	–	100		V_{EB}=6V
Collector-emitter saturation voltage	$V_{CE(sat)}$ ∗	–	180	370	mV	I_C/I_B=1.5A/75mA
DC current gain	h_{FE}	270	–	680	–	V_{CE}=2V, I_C=200mA
Transition frequency	f_T	–	280	–	MHz	V_{CE}=2V, I_E= −200mA , f=100MHz
Collector output capacitance	Cob	–	20	–	pF	V_{CB}=10V , I_E=0mA , f=1MHz

∗ Pulsed

●**Electrical characteristics curves**

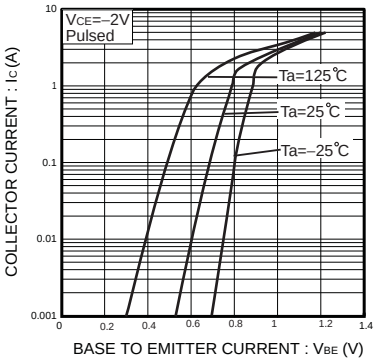


Fig.1 Grounded emitter propagation characteristics

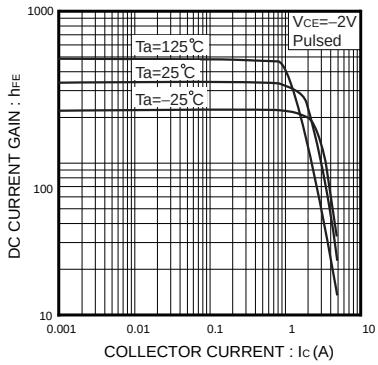


Fig.2 DC current gain vs. collector current

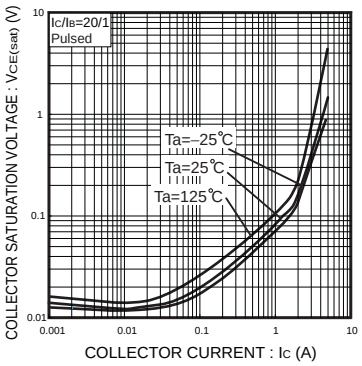


Fig.3 Collector-emitter saturation voltage base-emitter saturation voltage vs. collector current

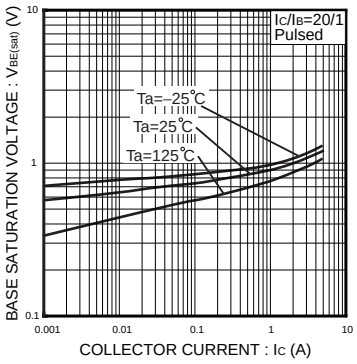


Fig.4 Base-emitter saturation voltage vs. collector current

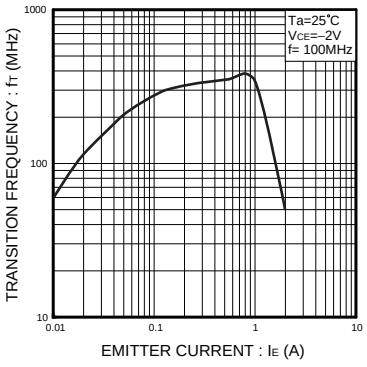


Fig.5 Gain bandwidth product vs. emitter current

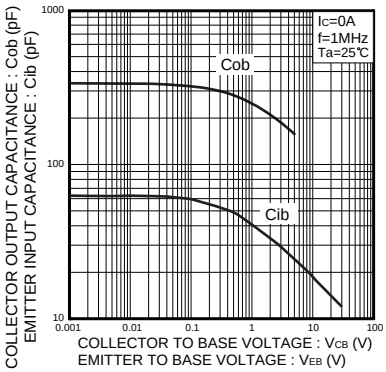


Fig.6 Collector output chapacitance vs. collector-base voltage Emitter input capacitance vs. emitter-base voltage

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).
Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.
It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2008 ROHM CO.,LTD.

ROHM CO., LTD. 21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan
TEL : +81-75-311-2121
FAX : +81-75-315-0172