
Digital transistors (built-in resistors)

DTA143XM / DTA143XE / DTA143XUA / DTA143XKA / DTA143XSA

●Features

1) Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit).
2) The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
3) Only the on/off conditions need to be set for operation, making device design easy.

●Equivalent circuit




●Structure

PNP digital transistor (Built-in resistor type)

●External dimensions (Units : mm)

DTA143XM




ROHM : VMT3

Abbreviated symbol : 33

(1) IN
(2) GND
(3) OUT

DTA143XE




ROHM : EMT3

Abbreviated symbol : 33

(1) GND
(2) IN
(3) OUT

DTA143XUA




ROHM : UMT3
EIAJ : SC-70

All terminals have same dimensions

Abbreviated symbol : 33

(1) GND
(2) IN
(3) OUT

DTA143XKA




ROHM : SMT3
EIAJ : SC-59

All terminals have same dimensions

Abbreviated symbol : 33

(1) GND
(2) IN
(3) OUT

DTA143XSA



ROHM : SPT
EIAJ : SC-72

(1) GND
(2) OUT
(3) IN

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits(DTA143X□)					Unit
		M	E	UA	KA	SA	
Supply voltage	V_{CC}	–50					V
Input voltage	V_I	–20~+7					V
Output current	I_O	–100					mA
	$I_{C(Max.)}$	–100					
Power dissipation	Pd	150		200		300	mW
Junction temperature	Tj	150					°C
Storage temperature	Tstg	–55~+150					°C

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	$V_{I(off)}$	–	–	–0.3	V	V_{CC}=–5V, I_O=–100µA
	$V_{I(on)}$	–2.5	–	–		V_O=–0.3V, I_O=–20mA
Output voltage	$V_{O(on)}$	–	–0.1	–0.3	V	I_O/I_I=–10mA/–0.5mA
Input current	I_I	–	–	–1.8	mA	V_I=–5V
Output current	$I_{O(off)}$	–	–	–0.5	µA	V_{CC}=–50V, V_I=0V
DC current gain	G_I	30	–	–	–	V_O=–5V, I_O=–10mA
Input resistance	R_1	3.29	4.7	6.11	kΩ	–
Resistance ratio	R_2/R_1	1.7	2.1	2.6	–	–
Transition frequency	f_T	–	250	–	MHz	V_{CE}=–10V, I_E=5mA, f=100MHz ＊

＊ Transition frequency of the device

●Packaging specifications

Type	Package	VMT3	EMT3	UMT3	SMT3	SPT
	Packaging type	Taping	Taping	Taping	Taping	Taping
	Code	T2L	TL	T106	T146	TP
	Basic ordering unit (pieces)	8000	3000	3000	3000	5000
DTA143XM		○	–	–	–	–
DTA143XE		–	○	–	–	–
DTA143XUA		–	–	○	–	–
DTA143XKA		–	–	–	○	–
DTA143XSA		–	–	–	–	○

●**Electrical characteristic curves**

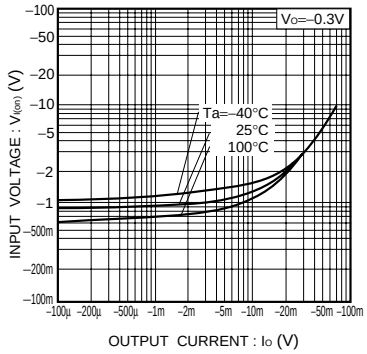


Fig.1 Input voltage vs. output current (ON characteristics)

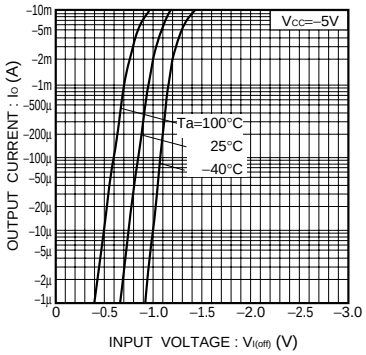


Fig.2 Output current vs. input voltage (OFF characteristics)

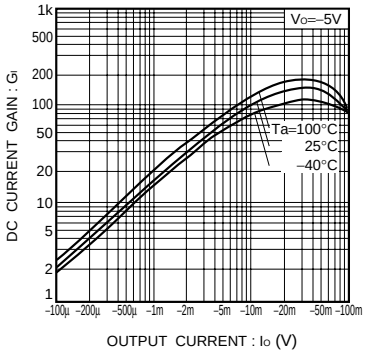


Fig.3 DC current gain vs. output current

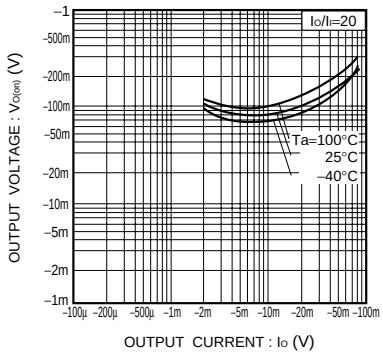


Fig.4 Output voltage vs. output current