TRANSISTOR (NPN) **Plastic-Encapsulate Transistor**


FEATURES


- Power dissipation

MARKING : AAQ , AAR , AAS

SOT-23

1. BASE
2. EMITTER
3. COLLECTOR



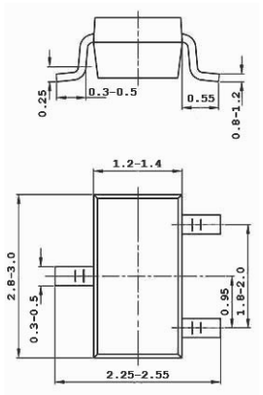

Unit:mm

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.

MAXIMUM RATINGS

Parameters	Symbols	Value	UNITS
Collector-Base Voltage	V_{CBO}	30	V
Collector-Emitter Voltage	V_{CEO}	15	V
Emitter-Base Voltage	V_{EBO}	6.5	V
Collector Current - Continuous	I_C	500	mA
Total Device Dissipation	P_D	200	mW
Junction and Storage Temperature	T_J,T_{stg}	-55-150	℃

*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

ELECTRICAL CHARACTERISTICS

Parameters	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	I_C=50μA, I_E=0	30			V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C=1mA, I_B=0	15			V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	I_E=50μA, I_C=0	6.5			V
Collector Cut-Off Current	I_{CBO}	V_{CB}=20V, I_E=0			0.5	μA
Emitter Cut-Off Current	I_{EBO}	V_{EB}=4V, I_C=0			0.5	μA
DC Current Gain	h_{FE}	V_{CE}=3V, I_C=100mA	120		560	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=500mA, I_B=50mA			0.4	V
Transition Frequency	f_T	V_{CE}=5V, I_C=50mA, f=100MHz		150		MHz
Collector Output Capacitance	C_{ob}	V_{CB}=10V, I_E=0, f=1MHz		15		pF

CLASSIFICATION OF h_{FE}

Rank	Q	R	S
Range	120-270	180-390	270-560