
杰力科技股份有限公司
Excelliance MOS Corporation

EMB20N03V

N-Channel Logic Level Enhancement Mode Field Effect Transistor

Product Summary:

BV_{DSS}	30V
$R_{DSON\ (MAX.)}$	20mΩ
I_D	12A





UIS, Rg 100% Tested

Pb-Free Lead Plating & Halogen Free

GP
GREEN PRODUCT

ABSOLUTE MAXIMUM RATINGS (T_C = 25 °C Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNIT
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current	T_C = 25 °C	I_D	12	A
	T_C = 100 °C		9	
Pulsed Drain Current[1]		I_{DM}	48	
Avalanche Current		I_{AS}	8	
Avalanche Energy	L = 0.1mH, ID=8A, RG=25Ω	E_{AS}	3.2	mJ
Repetitive Avalanche Energy[2]	L = 0.05mH	E_{AR}	1.6	
Power Dissipation	T_C = 25 °C	P_D	21	W
	T_C = 100 °C		8.3	
Power Dissipation	T_A = 25 °C	P_D	2.5	W
	T_A = 100 °C		1	
Operating Junction & Storage Temperature Range		T_j, T_{stg}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNIT
Junction-to-Case	$R_{\theta JC}$		6	°C / W
Junction-to-Ambient[3]	$R_{\theta JA}$		50	

[1]Pulse width limited by maximum junction temperature.

[2]Duty cycle ≤ 1%

[3]50°C / W when mounted on a 1 in^2 pad of 2 oz copper.

ELECTRICAL CHARACTERISTICS (T_C = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D = 250μA	30			V
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250μA	1	1.5	3	
Gate-Body Leakage	I_{GSS}	V_{DS} = 0V, V_{GS} = ±20V			±100	nA
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 24V, V_{GS} = 0V			1	μA
		V_{DS} = 20V, V_{GS} = 0V, T_J = 125 °C			25	
On-State Drain Current[1]	$I_{D(ON)}$	V_{DS} = 10V, V_{GS} = 10V	12			A
Drain-Source On-State Resistance[1]	$R_{DS(ON)}$	V_{GS} = 10V, I_D = 8A		15.5	20	mΩ
		V_{GS} = 4.5V, I_D = 6A		25	30	
Forward Transconductance[1]	g_{fs}	V_{DS} = 5V, I_D = 8A		16		S
DYNAMIC						
Input Capacitance	C_{iss}	V_{GS} = 0V, V_{DS} = 15V, f = 1MHz		520		pF
Output Capacitance	C_{oss}			88		
Reverse Transfer Capacitance	C_{rss}			62		
Gate Resistance	R_g	V_{GS} = 15mV, V_{DS} = 0V, f = 1MHz		2.0		Ω
Total Gate Charge[1,2]	Q_g(V_{GS}=10V)	V_{DS} = 15V, V_{GS} = 10V, I_D = 8A		11.5		nC
	Q_g(V_{GS}=4.5V)			5		
Gate-Source Charge[1,2]	Q_{gs}			1.6		
Gate-Drain Charge[1,2]	Q_{gd}			2.8		
Turn-On Delay Time[1,2]	$t_{d(on)}$	V_{DS} = 15V, I_D = 1A, V_{GS} = 10V, R_{GS} = 6Ω		9		nS
Rise Time[1,2]	t_r			12		
Turn-Off Delay Time[1,2]	$t_{d(off)}$			30		
Fall Time[1,2]	t_f			15		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_C = 25 °C)						
Continuous Current	I_S				2.3	A
Pulsed Current[3]	I_{SM}				9.2	
Forward Voltage[1]	V_{SD}	I_F = I_S, V_{GS} = 0V			1.2	V
Reverse Recovery Time	t_{rr}	I_F = I_S, dI_F/dt = 100A / μS		45		nS
Peak Reverse Recovery Current	$I_{RM(REC)}$			30		A
Reverse Recovery Charge	Q_{rr}			2		nC

[1]Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.

[2]Independent of operating temperature.

[3]Pulse width limited by maximum junction temperature.

Ordering & Marking Information:


Device Name: EMB20N03V for EDFN 3 x 3



B20N03: Device Name

ABCDEFG: Date Code


Outline Drawing

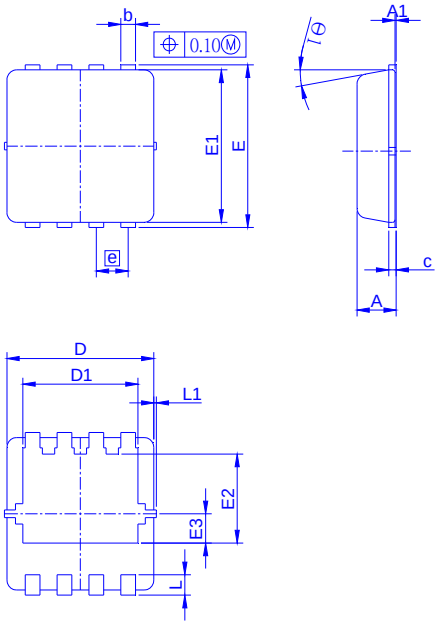



Dimension in mm


Dimension	A	A1	b	c	D	D1	E	E1	E2	E3	e	L	L1	Θ1
Min.	0.70	0	0.24	0.10	2.95	2.25	3.15	2.95	1.65			0.30		0°
Typ.	0.80		0.30	0.152	3.00	2.35	3.20	3.00	1.75	0.575	0.65	0.40	0.13	10°
Max.	0.90	0.05	0.37	0.25	3.15	2.45	3.40	3.15	1.96			0.50		12°


Recommended minimum pads




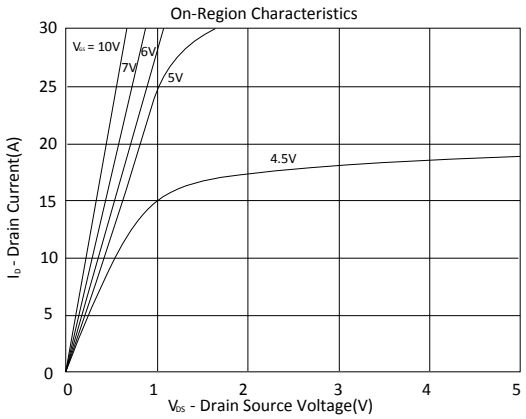

On-Region Characteristics
V_{GS} = 10V
7V
6V
5V
4.5V
I_D - Drain Current(A)
V_{DS} - Drain Source Voltage(V)

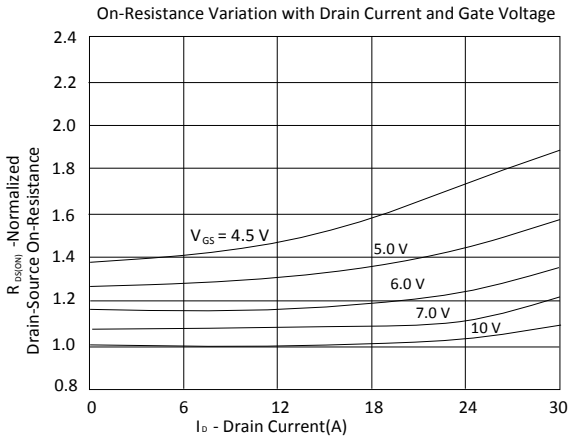
On-Resistance Variation with Drain Current and Gate Voltage
V_{GS} = 4.5 V
5.0 V
6.0 V
7.0 V
10 V
$R_{DS(ON)}$ -Normalized
Drain-Source On-Resistance
I_D - Drain Current(A)

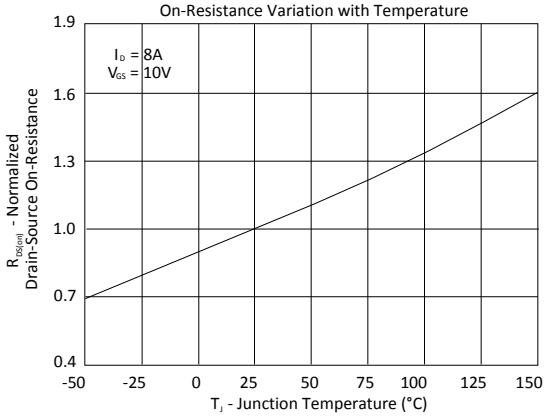

On-Resistance Variation with Temperature
I_D = 8A
V_{GS} = 10V
$R_{DS(on)}$ - Normalized
Drain-Source On-Resistance
T_J - Junction Temperature (°C)

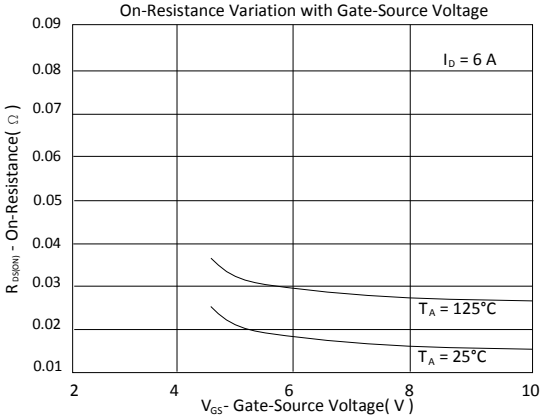
On-Resistance Variation with Gate-Source Voltage
I_D = 6 A
T_A = 125°C
T_A = 25°C
$R_{DS(ON)}$ - On-Resistance(Ω)
V_{GS}- Gate-Source Voltage(V)

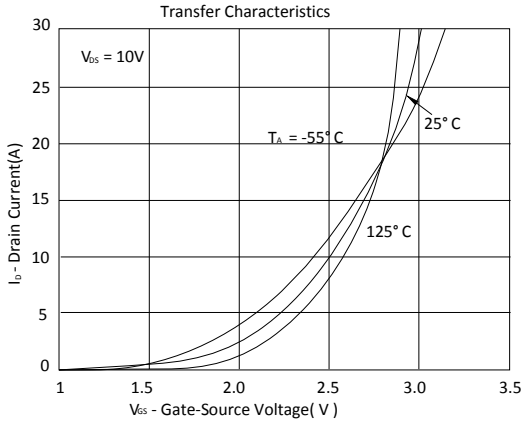

Transfer Characteristics
V_{DS} = 10V
T_A = -55° C
25° C
125° C
I_D - Drain Current(A)
V_{GS} - Gate-Source Voltage(V)

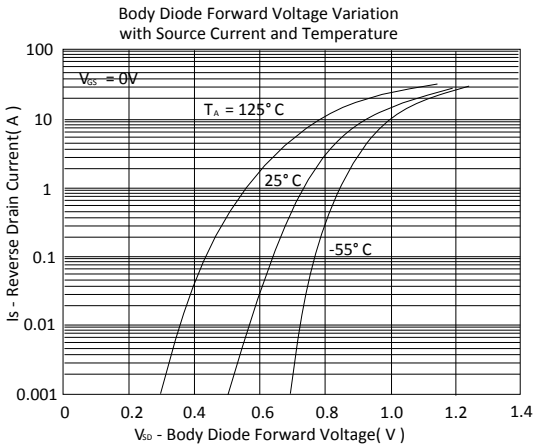
Body Diode Forward Voltage Variation
with Source Current and Temperature
V_{GS} = 0V
T_A = 125° C
25° C
-55° C
I_S - Reverse Drain Current(A)
V_{SD} - Body Diode Forward Voltage(V)


Gate Charge Characteristics

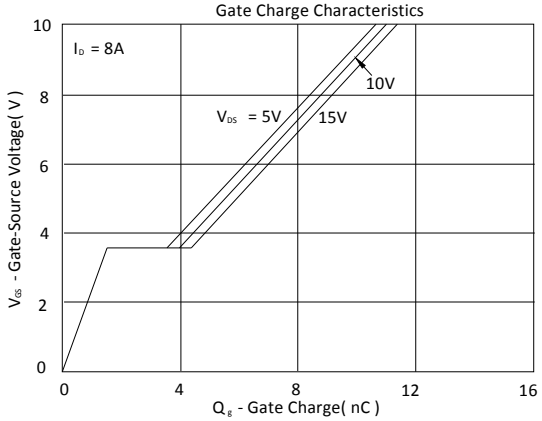


Capacitance Characteristics

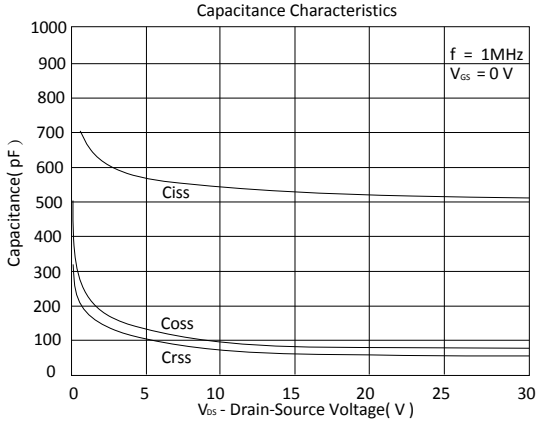

Maximum Safe Operating Area

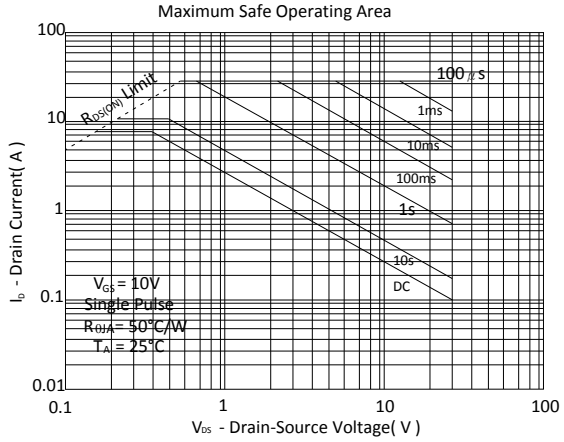

Single Pulse Maximum Power Dissipation

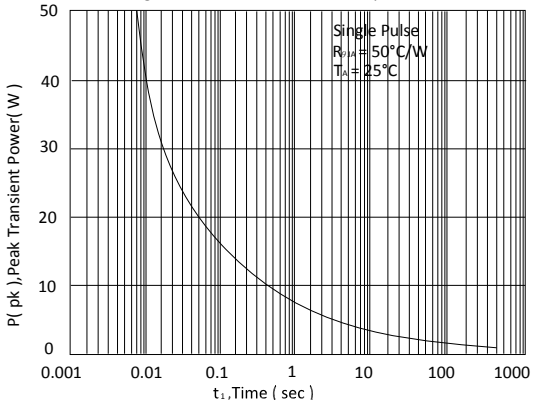

Transient Thermal Response Curve

