SCHOTTKY BARRIER DIODE


VOLTAGE RANGE: 40 VOLTS
CURRENT: 100mA

FEATURES

- Small surface mounting type
- Low reverse current and low forward voltage
- High reliability

MARKING: D3C

SOT-23-3L

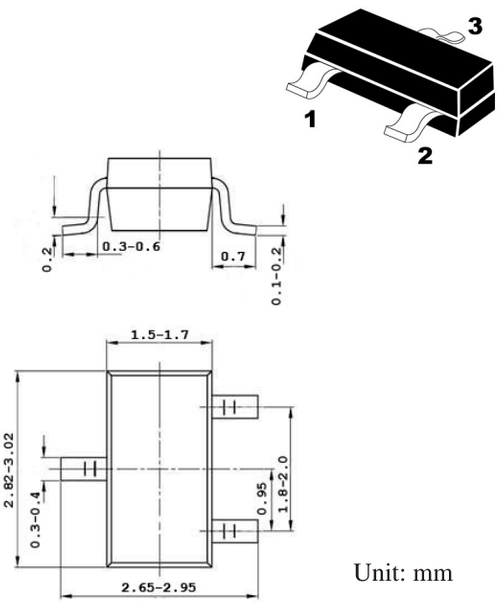

Unit: mm

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Parameters	Symbols	Limits	UNITS
Peak Reverse Voltage	V_{RM}	40	V
DC Reverse Voltage	V_R	40	V
Mean Rectifying Current	I_O	100	mA
Peak Forward Surge Current	I_{FSM}	1	A
Junction Temperature	T_{rj}	125	℃
Storage Temperature	T_{stg}	-40~+125	℃

ELECTRICAL RATINGS

Parameters	Symbols	Test conditions	Min.	Typ.	Max.	UNITS
Forward Voltage	V_{F1}	I_F=100mA			0.55	V
	V_{F2}	I_F=10mA			0.34	V
Reverse Current	I_R	V_R=10V			30	μA
Capacitance Between Terminals	C_T	V_R =10V, f=1MHz		6		pF