
L5200

CMOS IC

LOW NOISE, REGULATED CHARGE PUMP DC/DC CONVERTERS

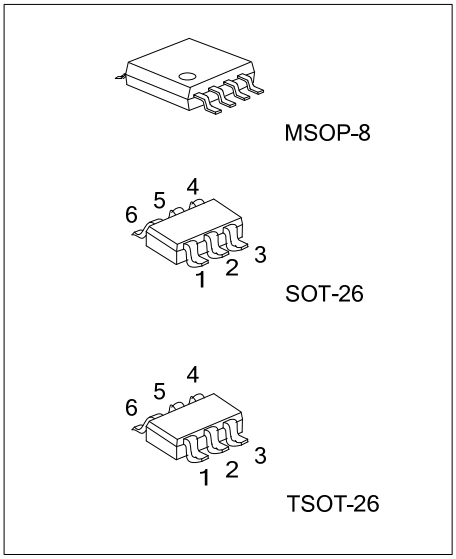

■ DESCRIPTION

The UTC **L5200-xx** series are low noise, constant frequency charge pump DC/DC converters and designed to increase efficiency in white LED application. The operating voltage range is 2.7V ~ V_{OUT} input with up to 100mA of output current. Low external parts counts (one flying capacitor and two small bypass capacitors at V_{IN} and V_{OUT}) make the UTC **L5200-xx** series ideally suited for small, battery-powered applications.

A charge-pump architecture maintains constant switching frequency to zero load and reduces both output and input ripple. The UTC **L5200-xx** series have thermal shutdown capability to escape the device damaged from a continuous short-circuit. With built-in soft-start circuitry to prevents excessive current flow at V_{IN} during start-up. High switching frequency enables the use of small ceramic capacitors. A low-current shutdown feature disconnects the load from V_{IN} and reduces quiescent current to <1μA.

The **L5200-ADJ** is available in MSOP-8 package and **L5200-fixed** in SOT-26 and TSOT-26 package.

■ FEATURES

* Low Noise Constant Frequency Operation
* Output Current: 100mA
* 2MHz Switching Frequency
* 4.5V/5.0V Fixed Output Voltage
* V_{IN} Range: 2.7V ~ V_{OUT}
* Automatic Soft-Start.
* No Inductors
* Less than 1μA of Shutdown Current

■ ORDERING INFORMATION

Ordering Number	Package	Packing
L5200L-AD-SM1-R	MSOP-8	Tape Reel
L5200L-45-AG6-R	SOT-26	Tape Reel
L5200L-50-AH6-R	TSOT-26	Tape Reel

Note: xx: Output Voltage, Refer to Marking Information



L5200G-xx-SM1-R

(1)Packing Type
(2)Package Type
(3)Output Voltage
(4)Green Package

(1) R: Tape Reel
(2) SM1: MSOP-8, AG6: SOT-26, AH6: TSOT-26
(3) xx: refer to Marking Information
(4) G: Halogen Free and Lead Free


Copyright © 2014 Unisonic Technologies Co., Ltd

■ MARKING INFORMATION


PACKAGE	VOLTAGE CODE	MARKING
MSOP-8	45: 4.5V 50: 5.0V AD :ADJ	
SOT-26 TSOT-26		

■ PIN CONFIGURATIONS

MSOP-8

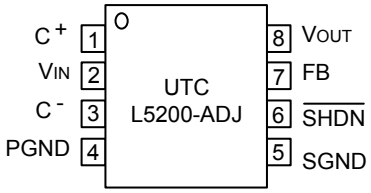

SOT-26/TSOT-26




■ PIN DESCRIPTION

PIN NO.		PIN NAME	FUNCTION
L5200-ADJ	L5200-xx		
MSOP-8	SOT-26/TSOT-26		
1	6	C+	Flying Capacitor Positive Terminal
2	5	V_{IN}	Input Supply Voltage, should be bypassed with a 1μF~4.7μf low ESR ceramic capacitor.
3	4	C^-	Flying Capacitor Negative Terminal
4, 5	2	GND	Ground terminal, should be tied to a ground plane for best performance
6	3	$\overline{SHDN}$	Shutdown Mode, Active-Low Input. A low on $\overline{SHDN}$ disables the L5200 series. $\overline{SHDN}$ must not be allowed to float.
7	X	FB	Feedback Input Pin for Adjustable output. An output divider should be connected from V_{OUT} to FB to program the output voltage.
8	1	V_{OUT}	Regulated Output Voltage, should be bypassed with a 1μF~4.7μF low ESR ceramic capacitor as close as possible to the pin for best performance


X : The pin is Inexistent for SOT-26 and TSOT-26 package.

■ BLOCK DIAGRAM

UTC L5200 Adjustable version (MSOP-8)

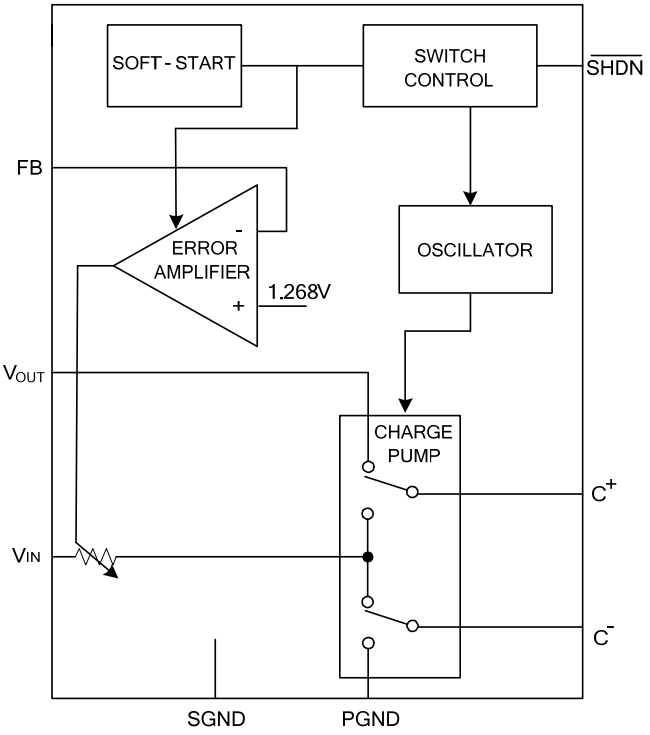

UTC L5200 fixed version (SOT-26/TSOT-26)

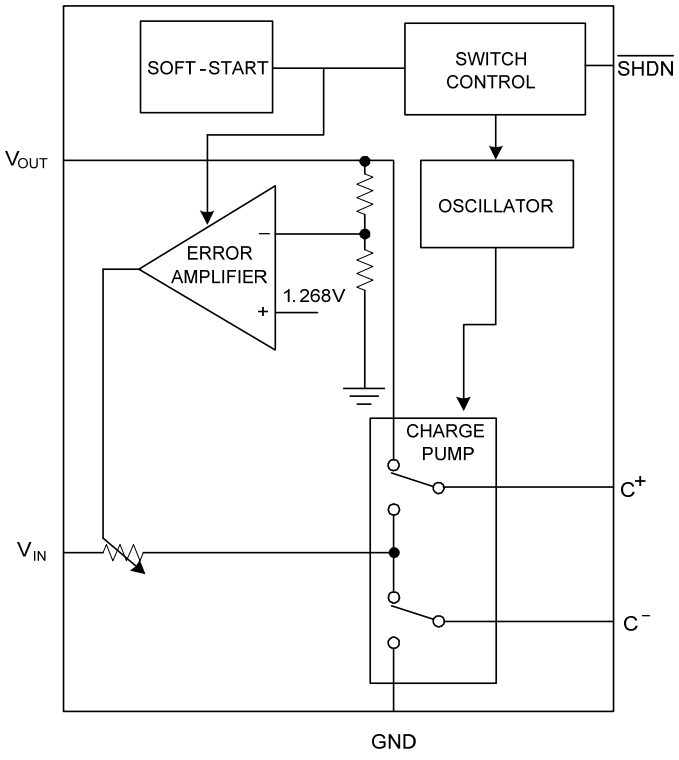

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage(to GND)	V_{IN}	-0.3 ~ 6	V
Charge Pump Voltage(to GND)	V_{OUT}	-0.3 ~ 5.5	V
Shutdown Voltage(to GND)	$V_{\overline{SHDN}}$	-0.3 ~ (V_{IN}+0.3)	V
Maximum DC Output Current (Note 1)	I_{OUT}	150	mA
V_{OUT} Short-Circuit Duration		Indefinite	
Operating Temperature	T_{OPR}	-20 ~ +85	°C
Storage Temperature	T_{STG}	-40 ~ +150	°C

Notes 1: Based on long-term current density limitations.
2: Stressed above Absolute Maximum Ratings may impair life or cause permanent damage to the device.
3. The device is guaranteed to meet performance specification within 0℃~+70℃ operating temperature range and assured by design from -20℃~+85℃, characteristic and correlation with static process control.

■ ELECTRICAL CHARACTERISTICS


(T_A =25°C, V_{IN} =3.6V, C_{FLY}=1μF, C_{IN}=1μF, C_{OUT}=1μF, unless otherwise specified.)

PARAMETER		SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Input Supply Voltage Range		V_{IN}		*	2.7		V_{OUT}	V
Output Voltage	L5200-4.5V	V_{OUT}			4.41	4.5	4.59	V
	L5200-5.0V		I_{OUT}≤100mA	*	4.9	5	5.1	V
Shutdown Input Threshold		V_{IH}		*	1.3			V
		V_{IL}		*			0.4	V
Feedback Voltage (For **L5200-ADJ**)		V_{FB}		*	1.217	1.268	1.319	V
Output Ripple Voltage(For **L5200-fixed**)		V_R	V_{IN}=3V, I_{OUT}=100mA			30		mV_{P-P}
Operating Supply Current		I_{CC}	I_{OUT}=0mA, $\overline{SHDN}$ =V_{IN}	*		1.7	5	mA
Shutdown Current		$I_{\overline{SHDN}}$	$\overline{SHDN}$ =0V, V_{OUT}=0V	*			1	μA
Shutdown Input Current		I_{IH}	$\overline{SHDN}$ =V_{IN}	*	-1		1	μA
		I_{IL}	$\overline{SHDN}$ =0V	*	-1		1	μA
Feedback Input Current (For **L5200-ADJ**)		I_{FB}	V_{FB}=1.4V	*	-50		50	nA
Open-Loop Output Resistance		R_{OL}	V_{IN}=3V, I_{OUT}=100mA V_{FB}=0V (R_{OL} ≡ ($2V_{IN}$ – V_{OUT})/I_{OUT})			9.2		Ω
Switching Frequency		F_{OSC}				1		MHz
Efficiency (For UTC **L5200-fixed**)		η	V_{IN}=3V, I_{OUT}=50mA			80		%
Soft Start Time		t_{ON}	V_{IN}=3V, I_{OUT}=0mA 10%~90%			0.8		ms

Note: * stand for specifications which apply over the designed operating temperature range.


■ TYPICAL APPLICATION CIRCUIT

Regulated 5V Output from a 2.7V ~ V_{OUT} Input

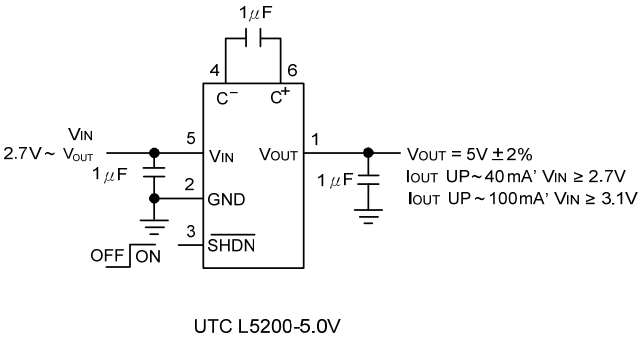


UTC L5200-5.0V

Output Ripple Voltage vs Load Current

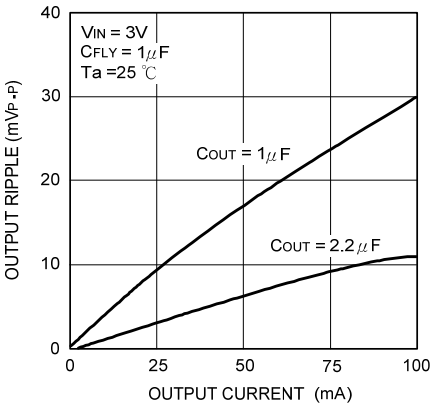


White or Blue LED Driver with LED Current Control (UTC L5200-ADJ)

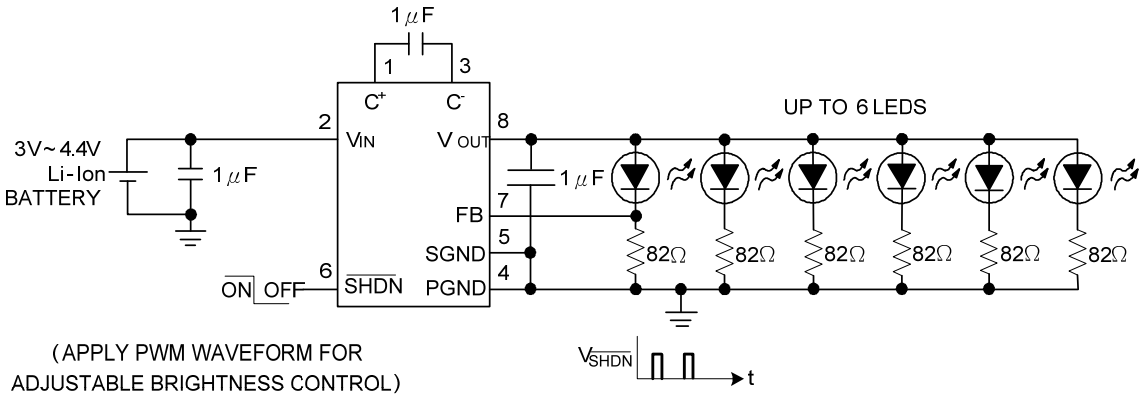


(APPLY PWM WAVEFORM FOR ADJUSTABLE BRIGHTNESS CONTROL)

USB Port to Regulated 5V Power Supply (UTC L5200-5.0V)

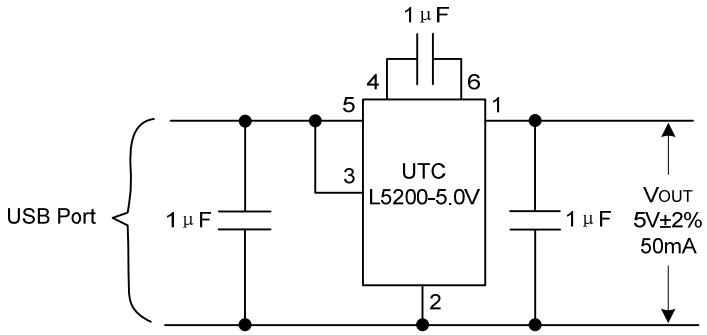


■ TYPICAL CHARACTERISTICS (L5200-5.0V)


Output Voltage vs Supply Voltage

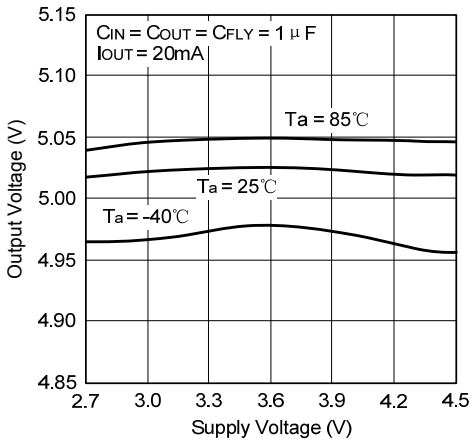


Output Voltage vs Load Current

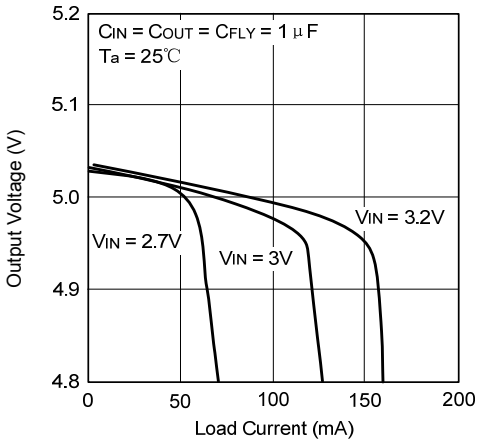


No Load Supply Current vs Supply Voltage

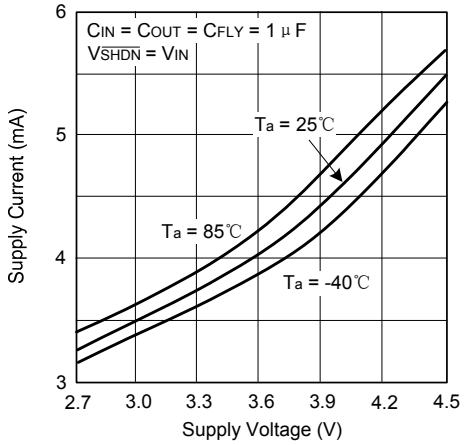


Oscillator Frequency vs Supply Voltage

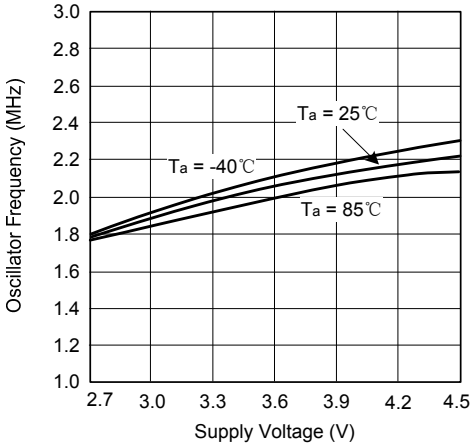

$V_{\overline{SHDN}}$ Threshold Voltage vs Supply Voltage

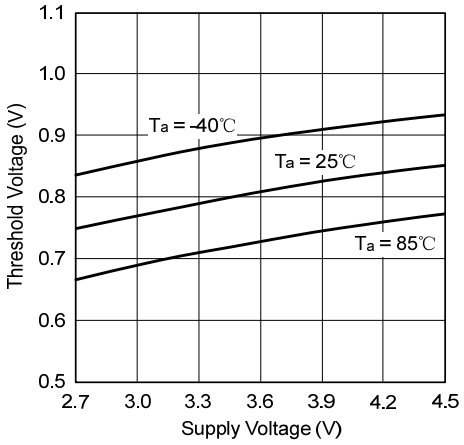


Efficiency vs Load Current

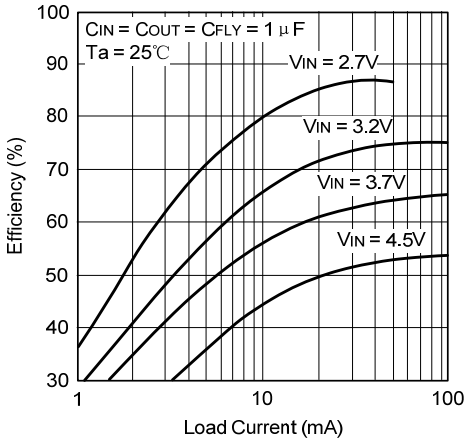


■ TYPICAL CHARACTERISTICS (L5200-5.0V) (cont.)


Short Circuit Current vs Supply Voltage

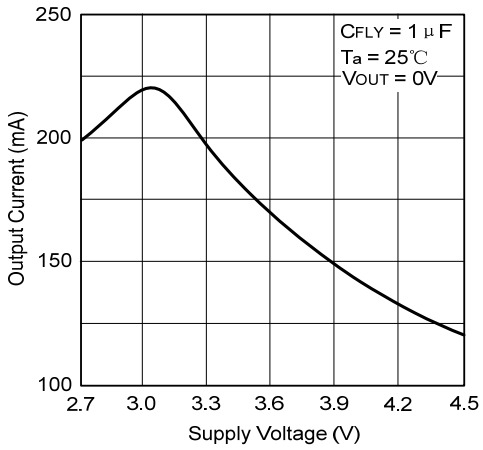


VOUT Soft-Start Ramp

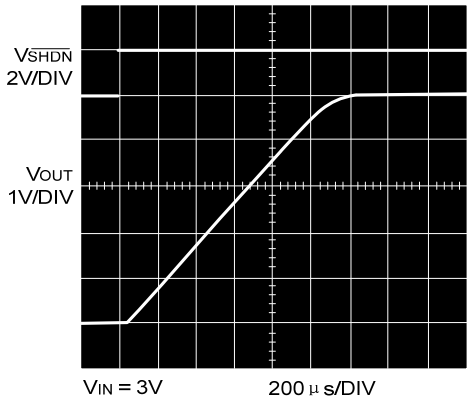

Output Ripple

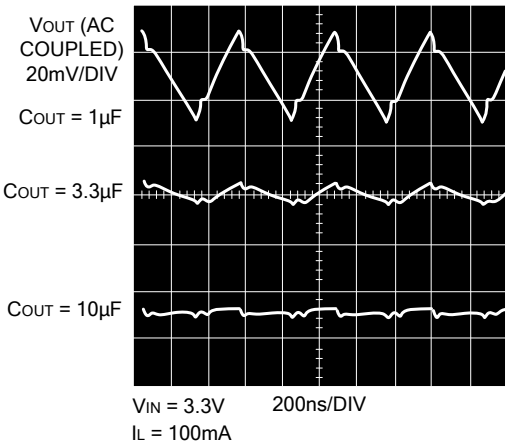

Load Transient Response

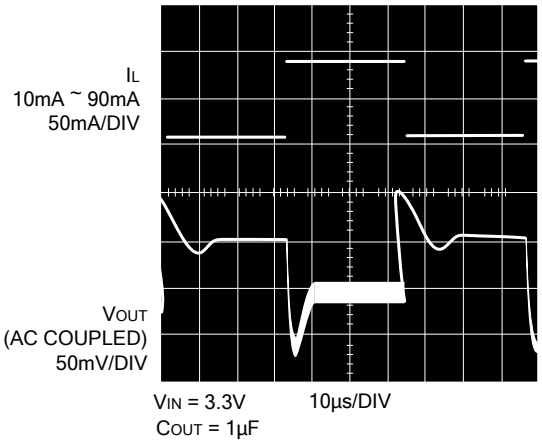

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.