Complementary Low-Threshold MOSFET Pair


PRODUCT SUMMARY			
	V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
N-Channel	20	0.385 @ V_{GS} = 4.5 V	0.70
		0.630 @ V_{GS} = 2.5 V	0.54
P-Channel	−8	0.600 @ V_{GS} = −4.5 V	−0.60
		0.850 @ V_{GS} = −2.5 V	−0.50
		1.200 @ V_{GS} = −1.8 V	−0.42

FEATURES

- TrenchFET® Power MOSFET


Pb-free
Pb-free Available

SOT-363
SC-70 (6-LEADS)



Top View

Marking Code



Ordering Information: Si1555DL-T1
Si1555DL-T1—E3 (Lead (Pb)-Free)

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C UNLESS OTHERWISE NOTED)

Parameter		Symbol	N-Channel		P-Channel		Unit
			5 secs	Steady State	5 secs	Steady State	
Drain-Source Voltage		V_{DS}	20		−8		V
Gate-Source Voltage		V_{GS}	±12		±8		
Continuous Drain Current (T_J = 150°C)[a]	T_A = 25°C	I_D	±0.70	±0.66	−0.60	−0.57	A
	T_A = 85°C		±0.50	±0.48	−0.43	−0.41	
Pulsed Drain Current		I_{DM}	±1.0				
Continuous Source Current (Diode Conduction)[a]		I_S	0.25	0.23	−0.25	−0.23	
Maximum Power Dissipation[a]	T_A = 25°C	P_D	0.30	0.27	0.30	0.27	W
	T_A = 85°C		0.16	0.14	0.16	0.14	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	−55 to 150				°C

THERMAL RESISTANCE RATINGS

Parameter		Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient[a]	t ≤ 5 sec	R_{thJA}	360	415	°C/W
	Steady State		400	460	
Maximum Junction-to-Foot (Drain)	Steady State	R_{thJF}	300	350	

Notes
a. Surface Mounted on 1" x 1" FR4 Board.

SPECIFICATIONS (T_J = 25°C UNLESS OTHERWISE NOTED)


Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
Static							
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250 μA	N-Ch	0.6		1.4	V
		V_{DS} = V_{GS}, I_D = −250 μA	P-Ch	−0.45		−1.0	
Gate-Body Leakage	I_{GSS}	V_{DS} = 0 V, V_{GS} = ±12 V	N-Ch			±100	nA
		V_{DS} = 0 V, V_{GS} = ±8 V	P-Ch			±100	
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 20 V, V_{GS} = 0 V	N-Ch			1	μA
		V_{DS} = −8 V, V_{GS} = 0 V	P-Ch			−1	
		V_{DS} = 20 V, V_{GS} = 0 V, T_J = 85°C	N-Ch			5	
		V_{DS} = −8 V, V_{GS} = 0 V, T_J = 85°C	P-Ch			−5	
On-State Drain Current[a]	$I_{D(on)}$	V_{DS} ≥ 5 V, V_{GS} = 4.5 V	N-Ch	1.0			A
		V_{DS} ≤ −5 V, V_{GS} = −4.5 V	P-Ch	−1.0			
Drain-Source On-State Resistance[a]	$r_{DS(on)}$	V_{GS} = 4.5 V, I_D = 0.66 A	N-Ch		0.320	0.385	Ω
		V_{GS} = −4.5 V, I_D = −0.57 A	P-Ch		0.510	0.600	
		V_{GS} = 2.5 V, I_D = 0.40 A	N-Ch		0.560	0.630	
		V_{GS} = −2.5 V, I_D = −0.48 A	P-Ch		0.720	0.850	
		V_{GS} = −1.8 V, I_D = −0.20 A	P-Ch		1.00	1.200	
Forward Transconductance[a]	g_{fs}	V_{DS} = 10 V, I_D = 0.66 A	N-Ch		1.5		S
		V_{DS} = −4 V, I_D = −0.57 A	P-Ch		1.2		
Diode Forward Voltage[a]	V_{SD}	I_S = 0.23 A, V_{GS} = 0 V	N-Ch		0.8	1.2	V
		I_S = −0.23 A, V_{GS} = 0 V	P-Ch		−0.8	−1.2	
Dynamic[b]							
Total Gate Charge	Q_g	N-Channel V_{DS} = 10 V, V_{GS} = 4.5 V, I_D = 0.66 A P-Channel V_{DS} = −4 V, V_{GS} = −4.5 V, I_D = −0.57 A	N-Ch		0.8	1.2	nC
			P-Ch		1.5	2.3	
Gate-Source Charge	Q_{gs}		N-Ch		0.06		
			P-Ch		0.17		
Gate-Drain Charge	Q_{gd}		N-Ch		0.30		
			P-Ch		0.16		
Turn-On Delay Time	$t_{d(on)}$	N-Channel V_{DD} = 10 V, R_L = 20 Ω, I_D ≅ 0.5 A, V_{GEN} = 4.5 V, R_g = 6 Ω P-Channel V_{DD} = −4 V, R_L = 8 Ω, I_D ≅ −0.5 A, V_{GEN} = −4.5 V, R_g = 6 Ω	N-Ch		10	20	ns
			P-Ch		6	12	
Rise Time	t_r		N-Ch		16	30	
			P-Ch		25	50	
Turn-Off Delay Time	$t_{d(off)}$		N-Ch		10	20	
			P-Ch		10	20	
Fall Time	t_f		N-Ch		10	20	
			P-Ch		10	20	
Source-Drain Reverse Recovery Time	t_{rr}	I_F = 0.23 A, di/dt = 100 A/μs	N-Ch		20	40	
		I_F = −0.23 A, di/dt = 100 A/μs	P-Ch		20	40	

Notes
a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
b. Guaranteed by design, not subject to production testing.


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) N-CHANNEL


Output Characteristics

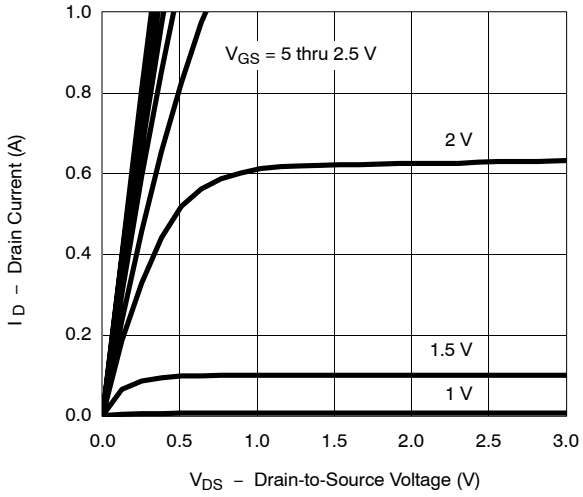


Transfer Characteristics

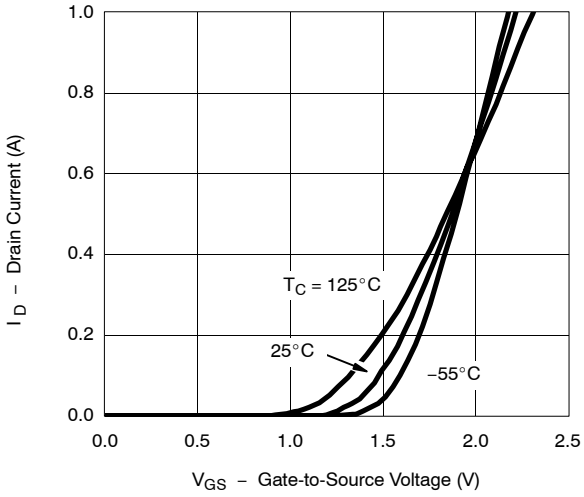


On-Resistance vs. Drain Current

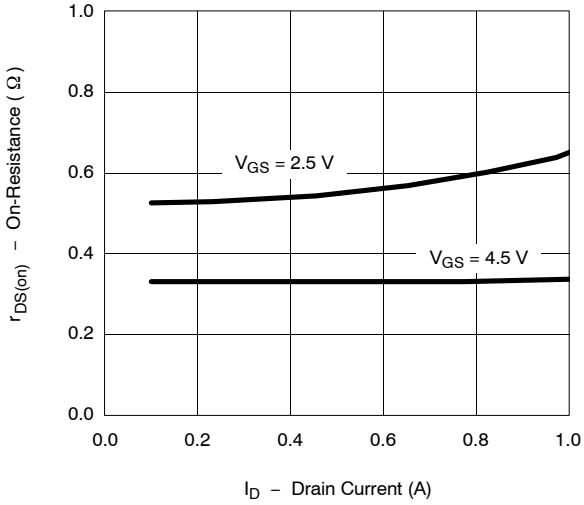


Capacitance

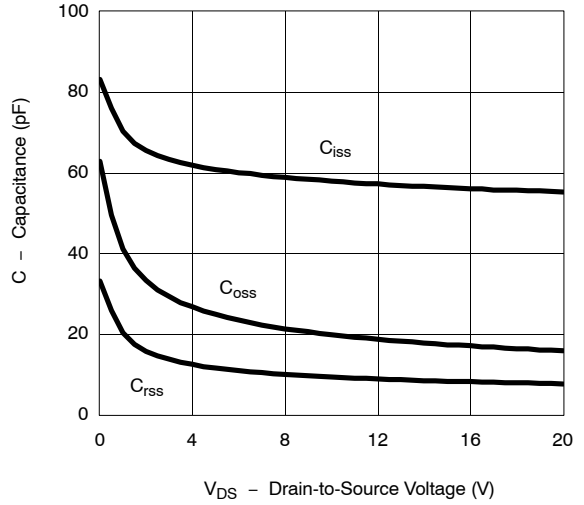

Gate Charge

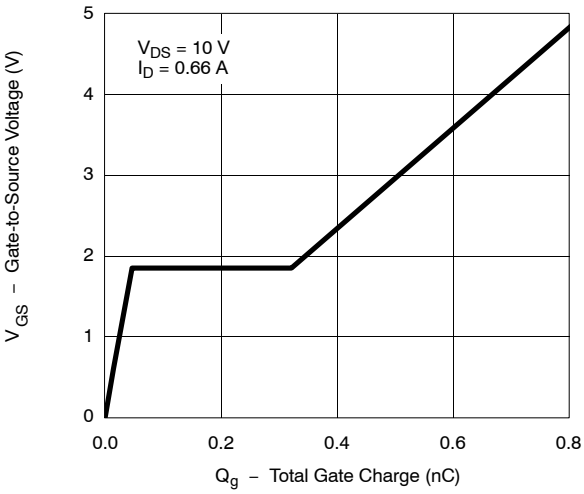


On-Resistance vs. Junction Temperature

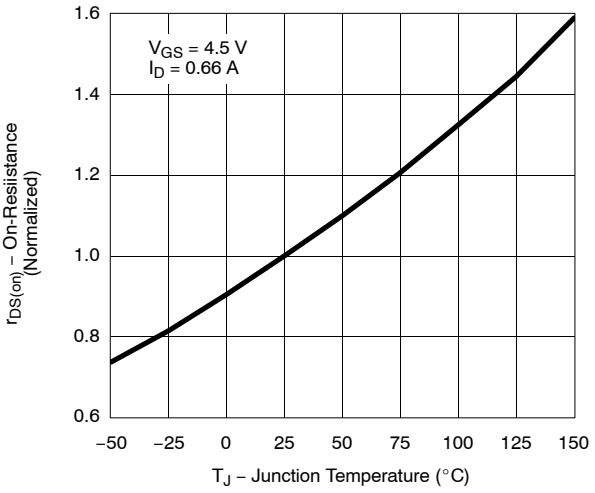


TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) N-CHANNEL


Source-Drain Diode Forward Voltage

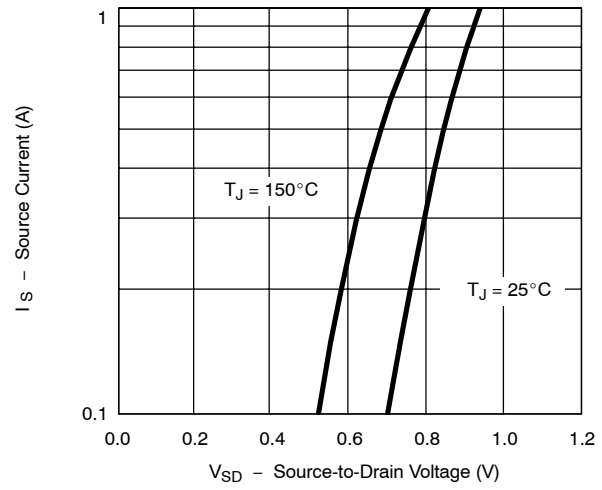


On-Resistance vs. Gate-to-Source Voltage

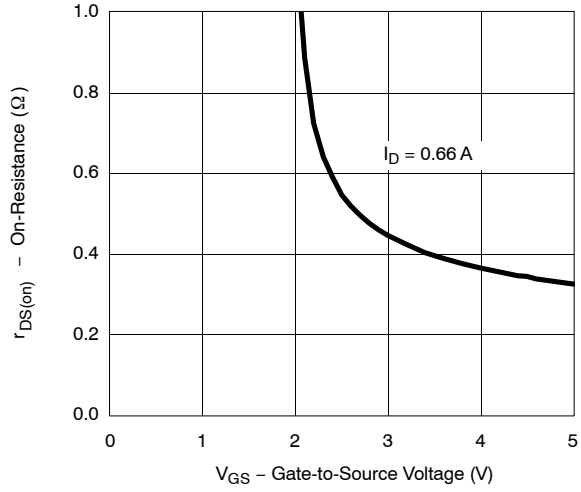


Threshold Voltage

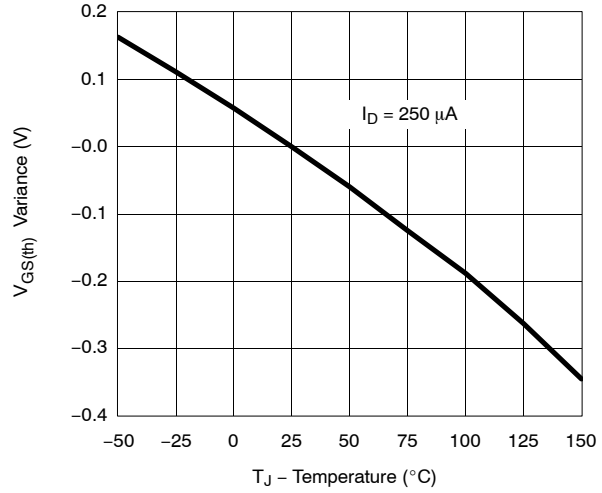

Single Pulse Power

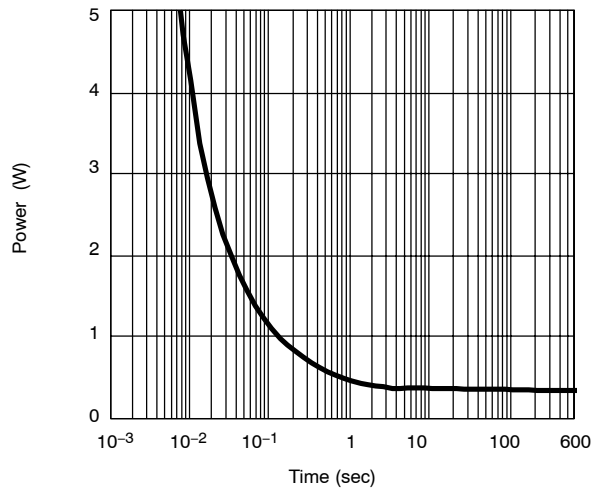


Normalized Thermal Transient Impedance, Junction-to-Ambient

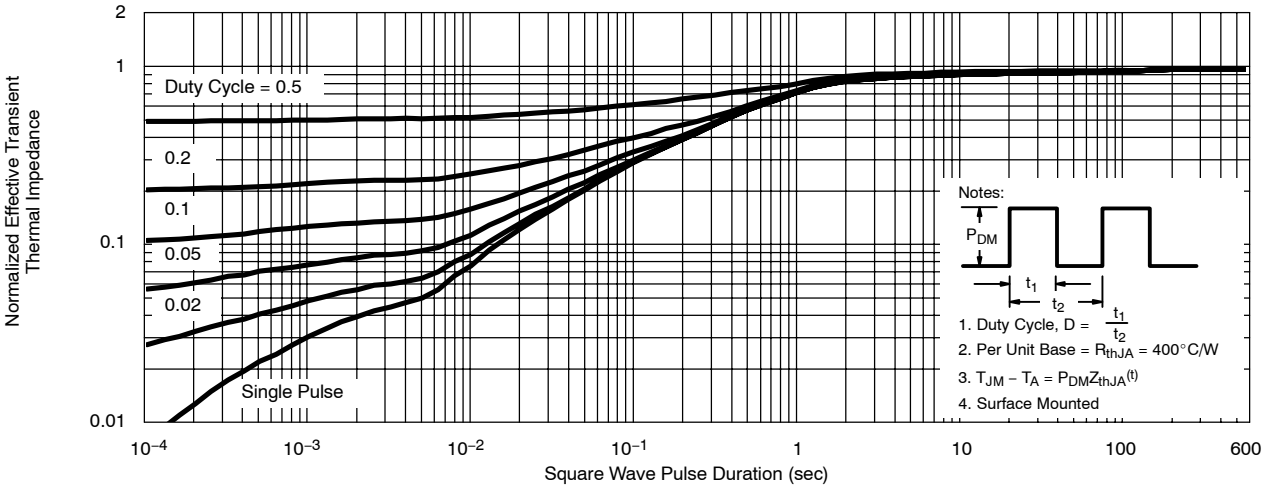


TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) N-CHANNEL

Normalized Thermal Transient Impedance, Junction-to-Foot

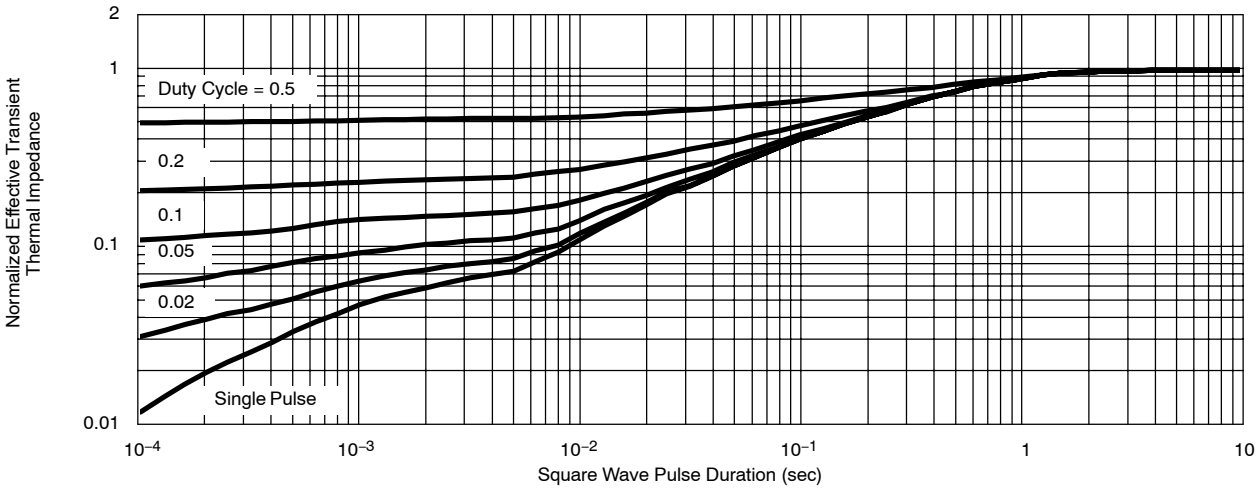


TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) P-CHANNEL


Output Characteristics

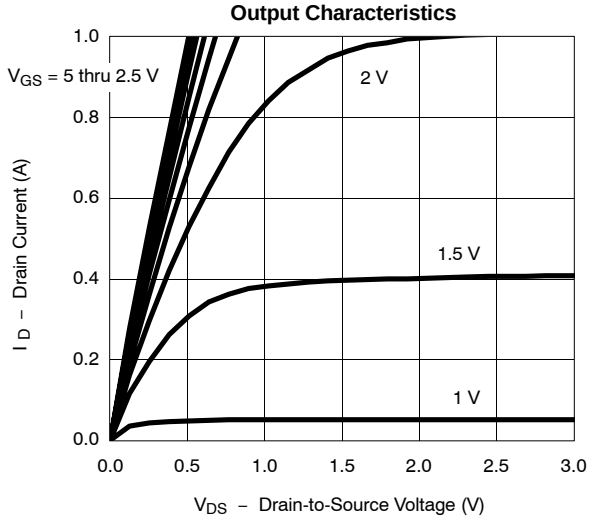


Transfer Characteristics

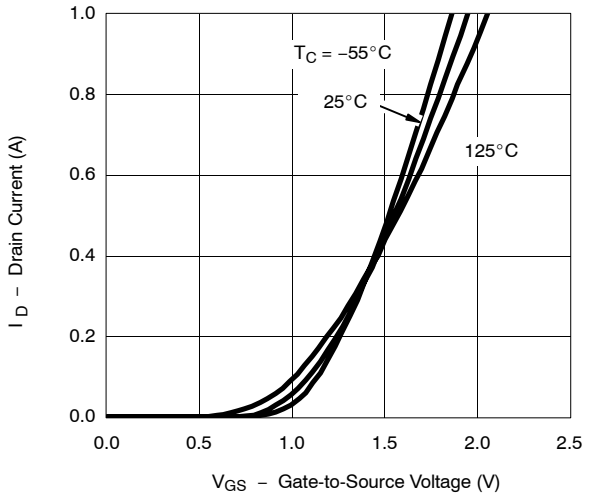

On-Resistance vs. Drain Current

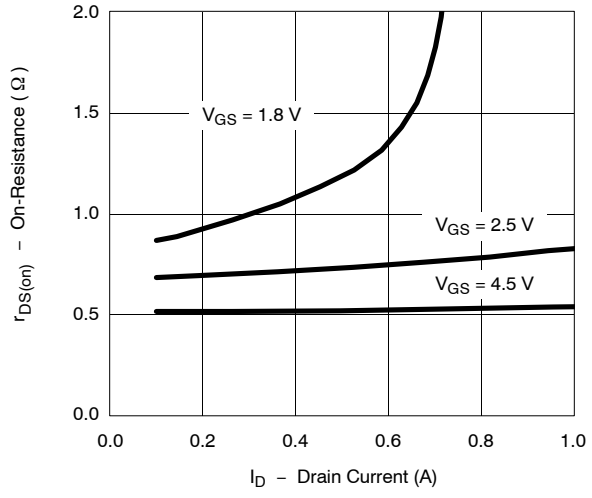


Capacitance

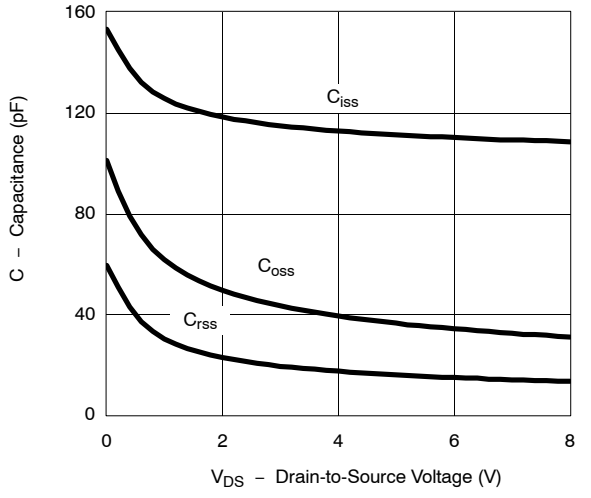


TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) P-CHANNEL


Gate Charge

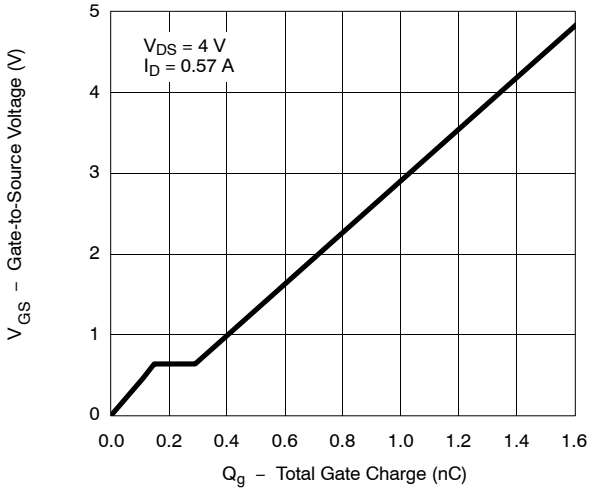


On-Resistance vs. Junction Temperature

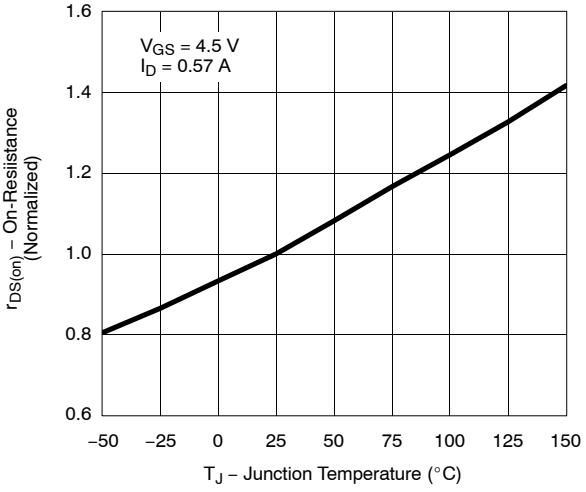


Source-Drain Diode Forward Voltage

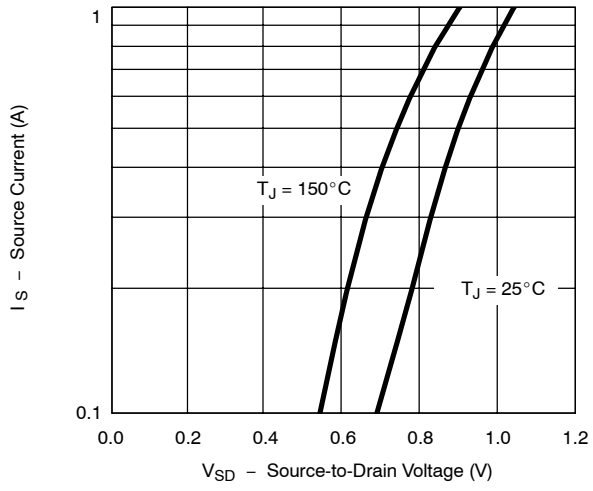


On-Resistance vs. Gate-to-Source Voltage

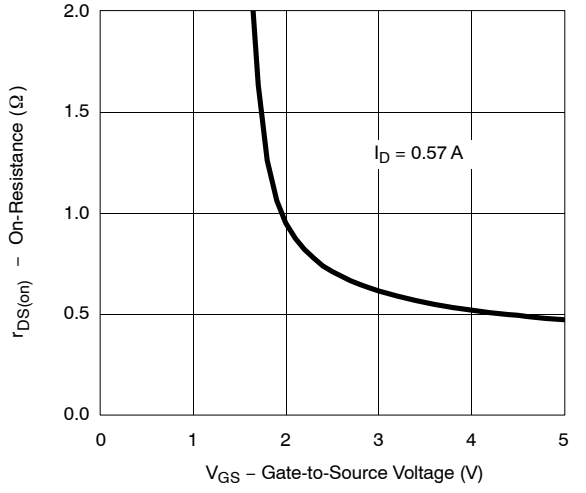

Threshold Voltage

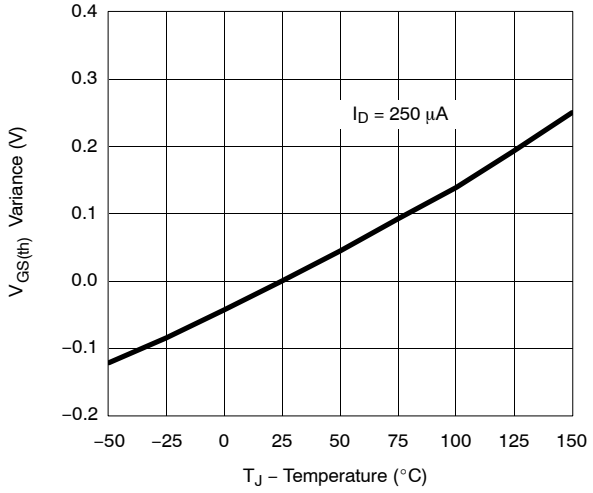


Single Pulse Power

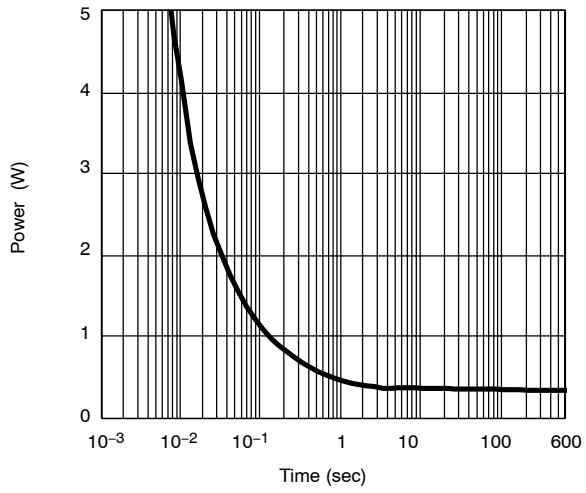


TYPICAL CHARACTERISTICS (25°C UNLESS NOTED) P-CHANNEL

Normalized Thermal Transient Impedance, Junction-to-Ambient

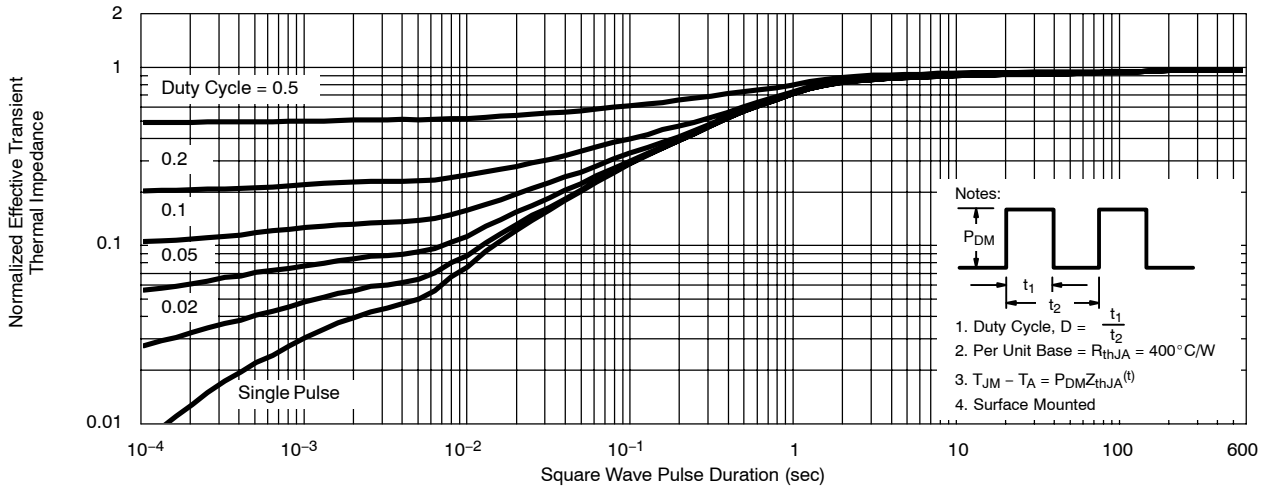

Normalized Thermal Transient Impedance, Junction-to-Foot

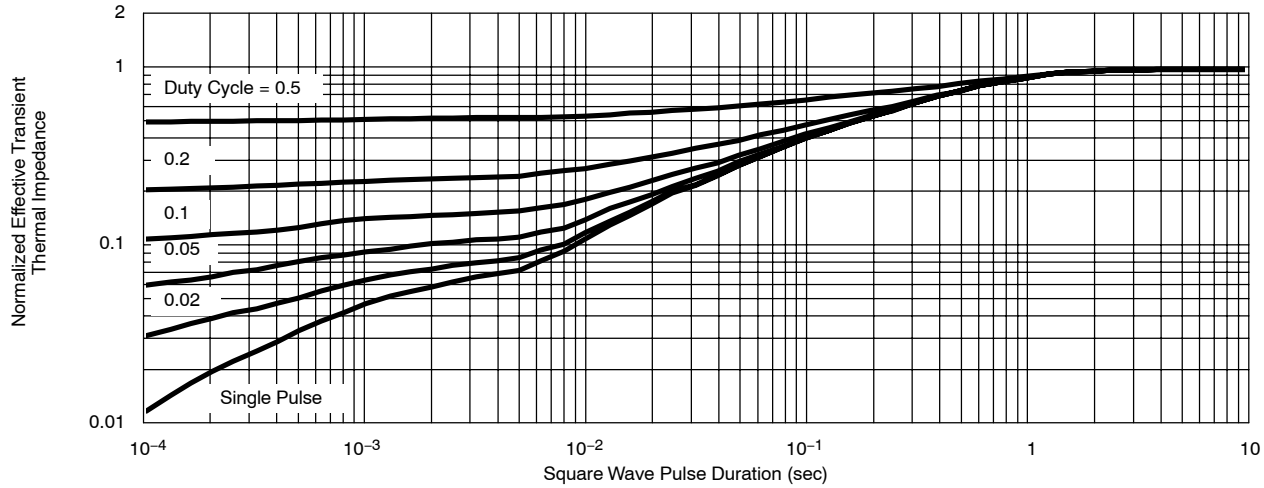

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see http://www.vishay.com/ppg?71079.

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.