

TRANSISTOR (PNP)

Plastic-Encapsulate Transistor



FEATURES

- Power dissipation

MARKING : RR , RS

SOT-323

1. BASE
2. EMITTER
3. COLLECTOR

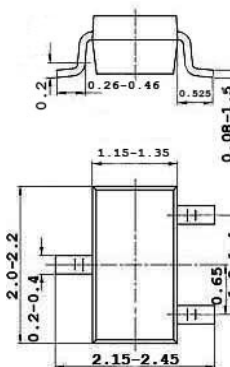

UNIT:mm

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

MAXIMUM RATINGS

Parameters	Symbols	Value	UNITS
Collector-Base Voltage	V_{CBO}	-120	V
Collector-Emitter Voltage	V_{CEO}	-120	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current - Continuous	I_C	-50	mA
Collector Dissipation	P_C	200	mW
Junction and Storage Temperature	T_J, T_{stg}	-55-150	°C

ELECTRICAL CHARACTERISTICS

Parameters	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = -50\mu A, I_E = 0$	-120			V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -1mA, I_B = 0$	-120			V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = -50\mu A, I_C = 0$	-5			V
Collector Cut-Off Current	I_{CBO}	$V_{CB} = -100V, I_E = 0$			-0.5	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB} = -4V, I_C = 0$			-0.5	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE} = -6V, I_C = -2mA$	180		560	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -10mA, I_B = -1mA$			-0.5	V
Transition Frequency	f_T	$V_{CE} = -12V, I_C = -2mA, f = 30MHz$		140		MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = -12V, I_E = 0, f = 1MHz$		3.2		pF

CLASSIFICATION OF $h_{FE(1)}$

Rank	R	S
Range	180-390	270-560